
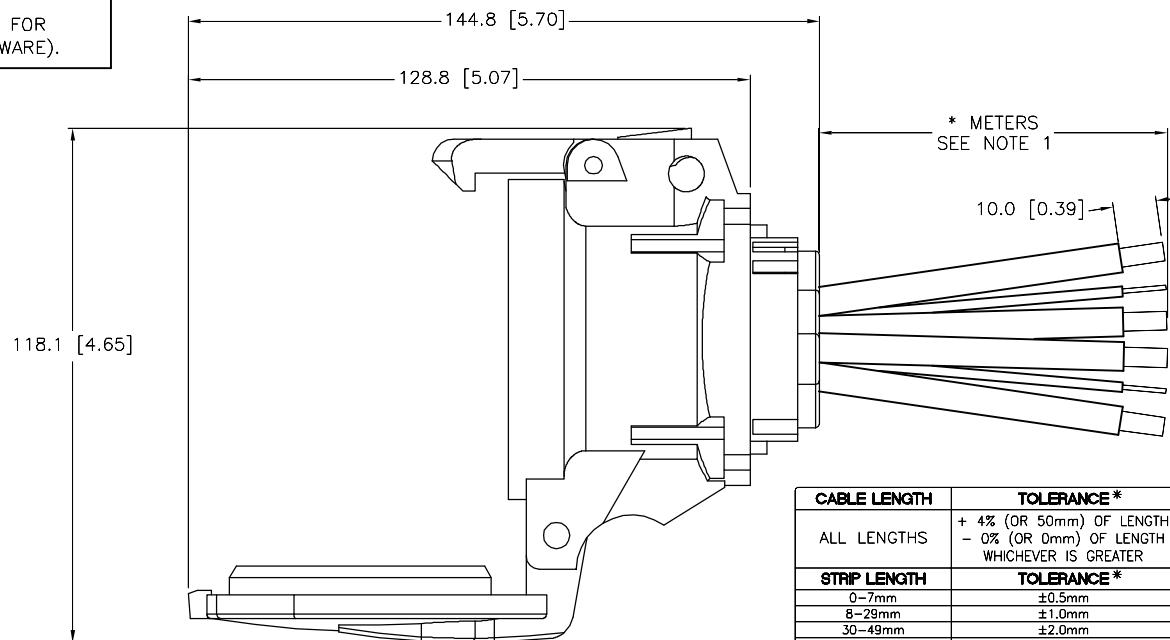


1 = BLACK (U)
2 = BLACK (V)
3 = BLACK (W)
⊥ = GREEN/YELLOW
A = BLUE/YELLOW (+)
B = BLUE/YELLOW (-)

Technical drawing of a circular plate with four mounting holes. The plate has an outer diameter of $\phi 57.1$ [$\phi 2.25$]. The mounting holes are spaced 48.0 [1.89] apart. The holes are 4X $\phi 1.94$ (CLEARANCE FOR 8-32 HARDWARE).

CONTACT MATERIAL/PLATING	NICKEL/SILVER
HOUSING MATERIAL/PLATING	PBT/BLUE
RATED CURRENT [A]	30 A (10 AWG), 0.5 A (14 AWG)
RATED VOLTAGE, MAX. VOLTAGE [VAC]	480 VAC/600 VAC
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	4x10 AWG, 2x14 AWG
TEMPERATURE RATING	-40°C to +60°C (-40°F to +140°F)
PROTECTION CLASS	IEC IP66, IP67

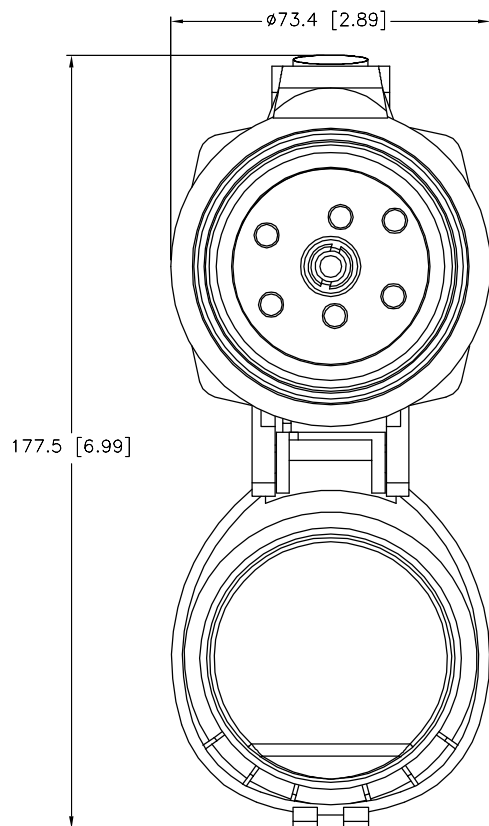


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES WIRE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		DRFT	NF	DATE	06/24/15	DESCRIPTION LPKF-3A-40A24-*	
2.		APVD	L.H.	SCALE	1=1.8		
3.		UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV A
4.		MILLIMETER [INCH]					
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			FILE: 777035321		SHEET 1 OF
SEE SPECIFICATIONS							
FINISH							
SEE SPECIFICATIONS					777035321		