


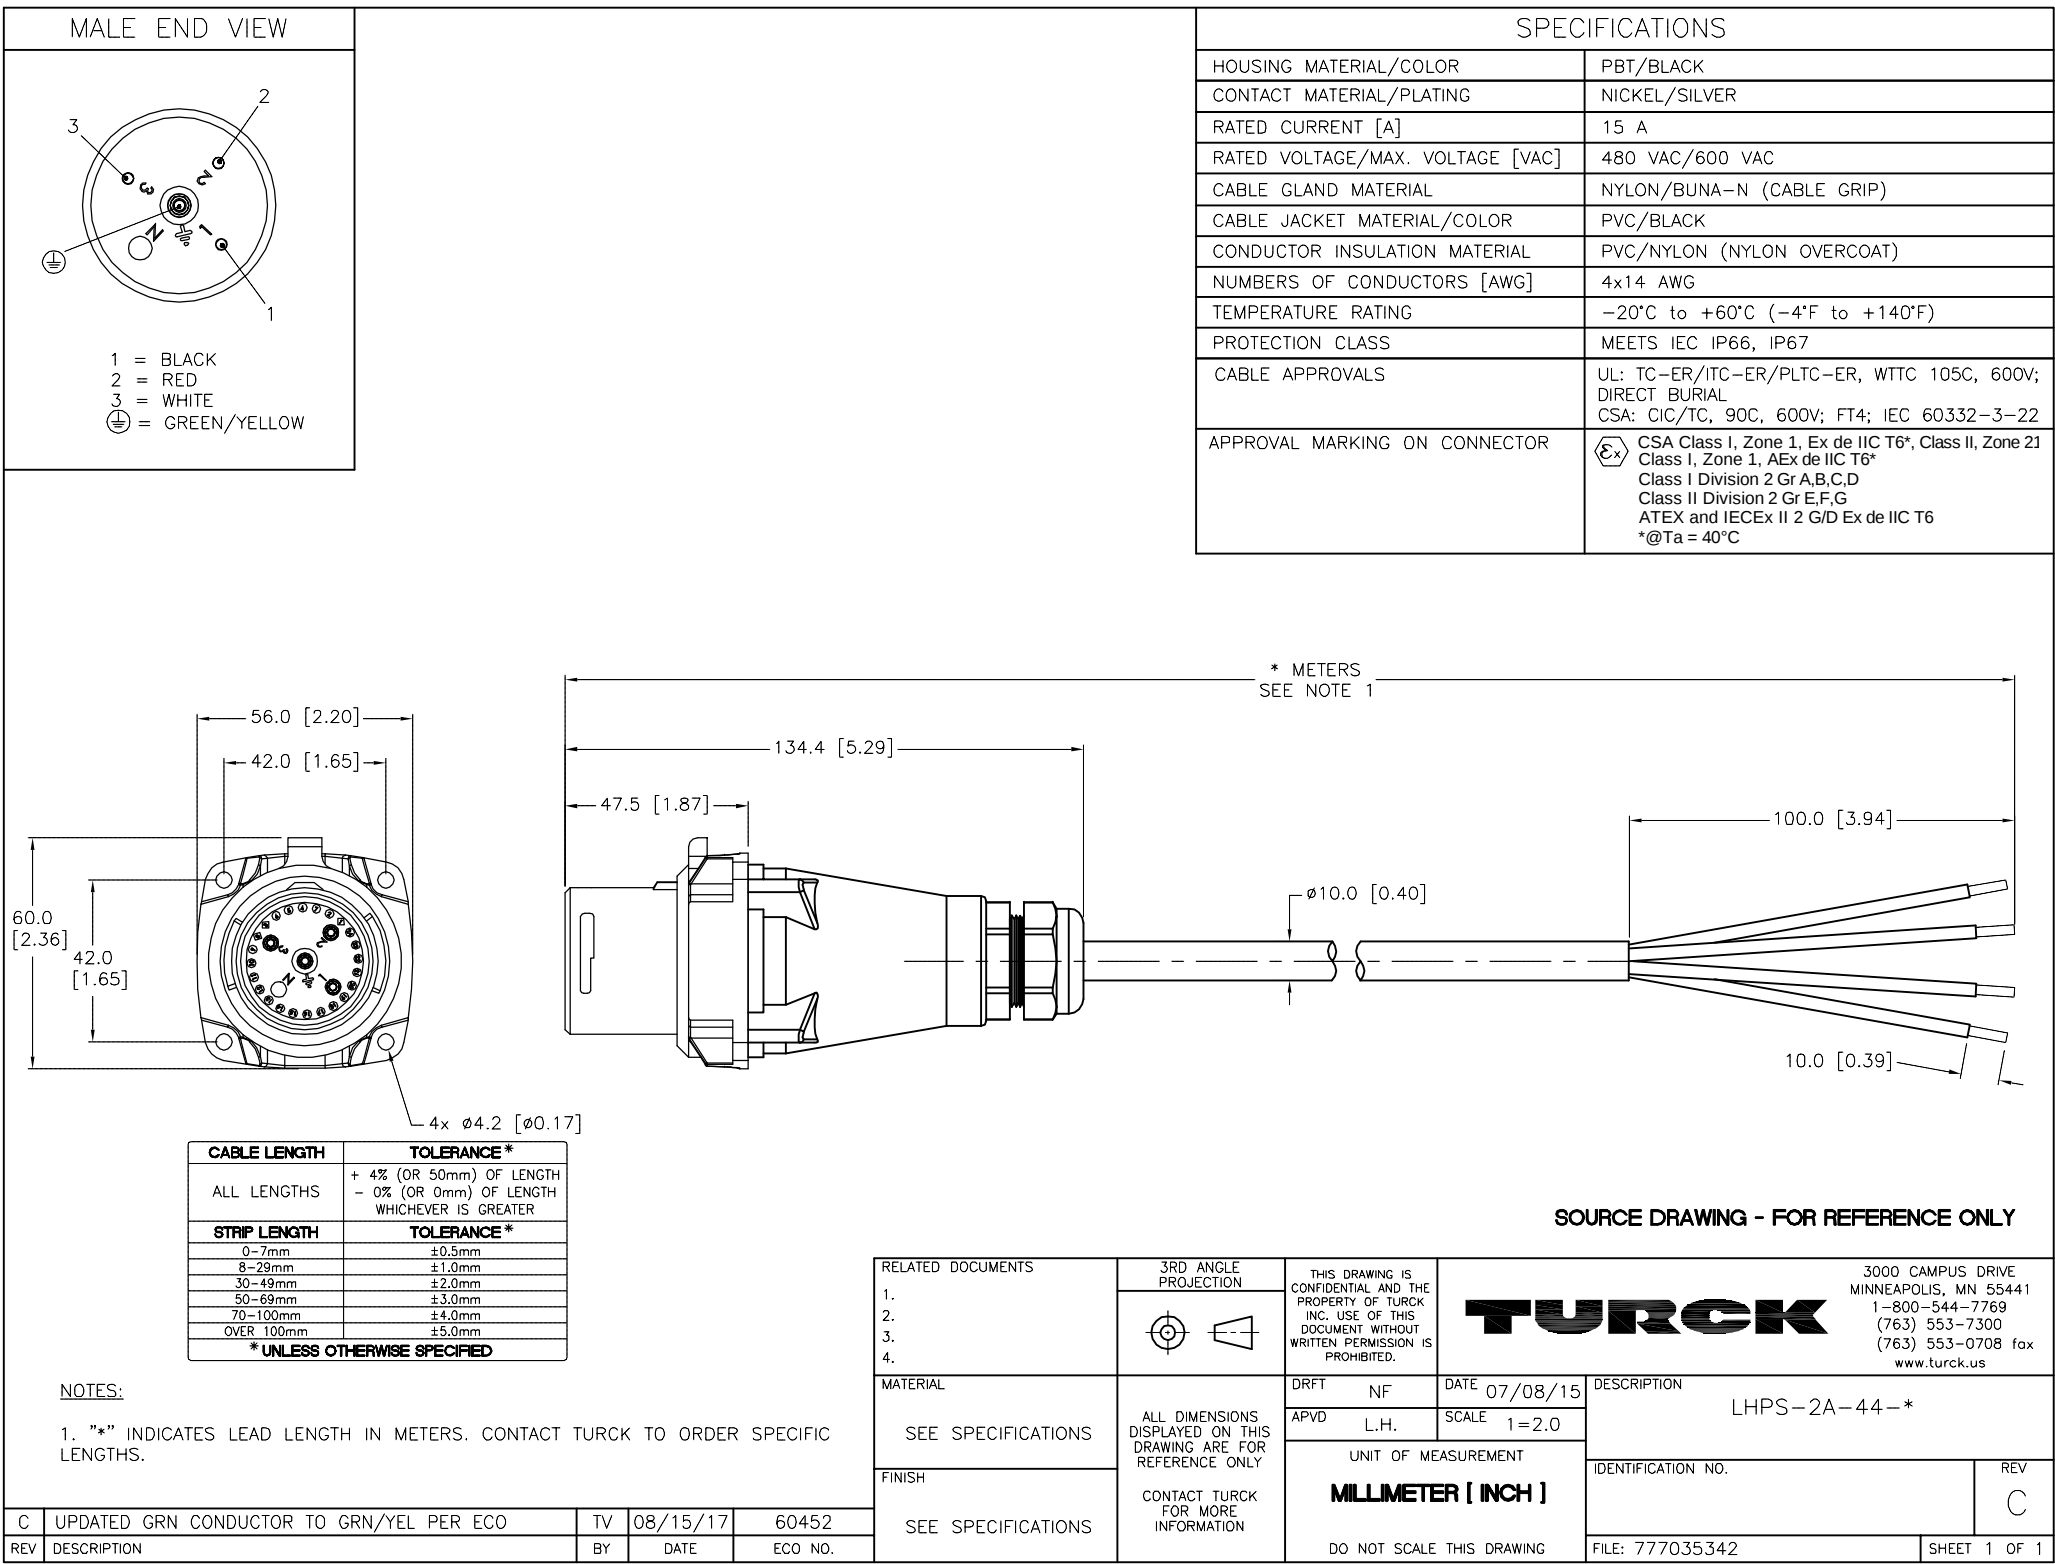

SPECIFICATIONS

HOUSING MATERIAL/COLOR	PBT/BLACK
CONTACT MATERIAL/PLATING	NICKEL/SILVER
RATED CURRENT [A]	15 A
RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC
CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
TEMPERATURE RATING	-20°C to +60°C (-4°F to +140°F)
PROTECTION CLASS	MEETS IEC IP66, IP67
CABLE APPROVALS	UL: TC-ER/ITC-ER/PLTC-ER, WTTTC 105C, 600V; DIRECT BURIAL CSA: CIC/TC, 90C, 600V; FT4; IEC 60332-3-22
APPROVAL MARKING ON CONNECTOR	CSA Class I, Zone 1, Ex de IIC T6*, Class II, Zone 21 Class I, Zone 1, AEx de IIC T6* Class I Division 2 Gr A,B,C,D Class II Division 2 Gr E,F,G ATEX and IECEx II 2 G/D Ex de IIC T6 *@Ta = 40°C

SOURCE DRAWING - FOR REFERENCE ONLY