



MALE END VIEW		SPECIFICATIONS	
		HOUSING MATERIAL/COLOR	PBT/BLACK
		CONTACT MATERIAL/PLATING	NICKEL/SILVER
		DRAWPLATE MATERIAL	PLASTIC
		RATED CURRENT [A]	15 A
		RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC
		CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
		CABLE JACKET MATERIAL/COLOR	PVC/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
		NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
		TEMPERATURE RATING	-20°C to +60°C (-4°F to +140°F)
		PROTECTION CLASS	MEETS IEC IP66, IP67
		CABLE APPROVALS	UL: TC-ER/ITC-ER/PLTC-ER, WTTT 105C, 600V; DIRECT BURIAL CSA: C1C/TC, 90C, 600V; FT4; IEC 60332-3-22
1 = BLACK 2 = RED 3 = WHITE  = GREEN/YELLOW		APPROVAL MARKING ON CONNECTOR	 CSA Class I, Zone 1, Ex de IIC T6*, Class II, Zone 21 Class I, Zone 1, AEx de IIC T6* Class I Division 2 Gr A,B,C,D Class II Division 2 Gr E,F,G ATEX and IECEx II 2 G/D Ex de IIC T6 *@Ta = 40°C

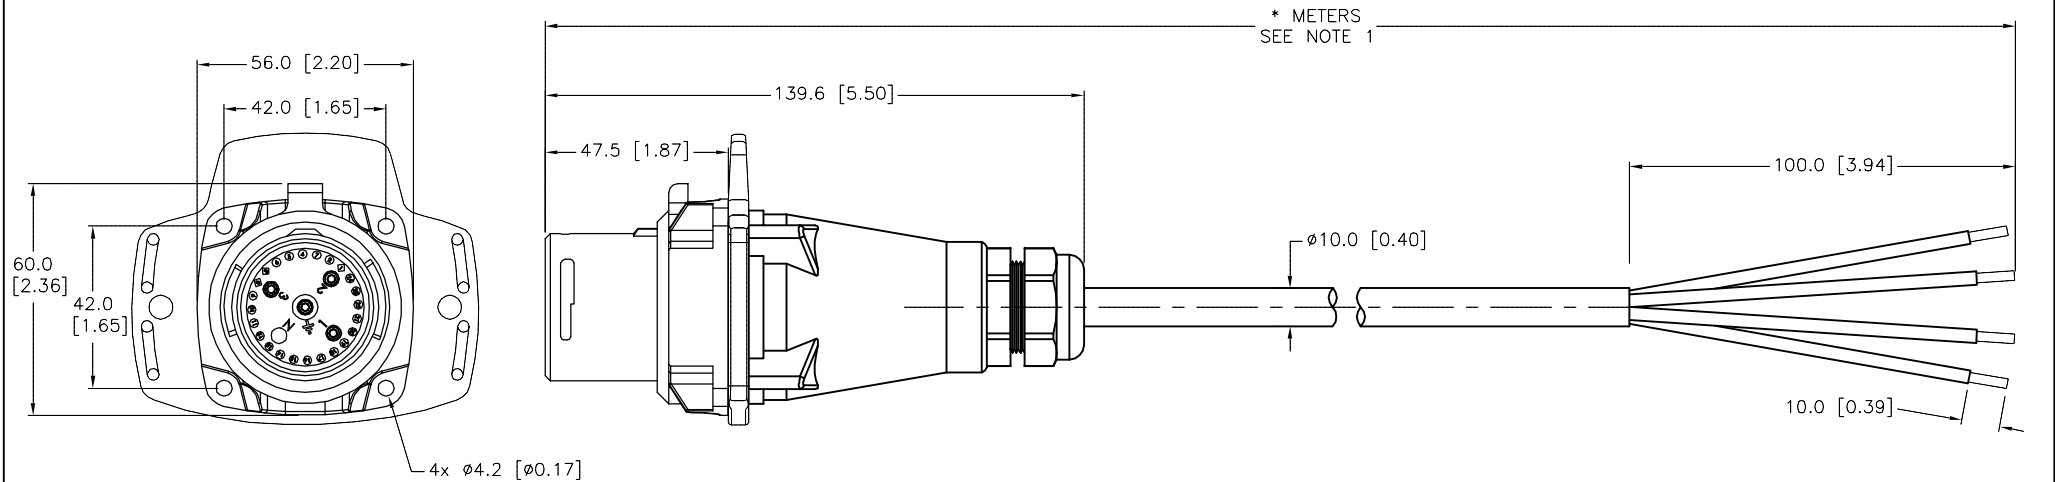


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

C	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	08/15/17	60452
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	07/08/15			DESCRIPTION LHPS-2A-44-* /D	
SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=2.0				
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.			REV C
SEE SPECIFICATIONS			MILLIMETER [INCH]						
		DO NOT SCALE THIS DRAWING			FILE: 777035356			SHEET 1 OF 1	