




FEMALE END VIEW



1 = BLACK
2 = RED
3 = WHITE
4 = GREEN/YELLOW

SPECIFICATIONS

HOUSING MATERIAL/COLOR	PBT/BLACK
CONTACT MATERIAL/PLATING	NICKEL/SILVER
DRAWPLATE MATERIAL	PLASTIC
RATED CURRENT [A]	15 A
RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC
CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
TEMPERATURE RATING	-20°C to +60°C (-4°F to +140°F)
PROTECTION CLASS	MEETS IEC IP66, IP67
CABLE APPROVALS	UL: TC-ER/ITC-ER/PLTC-ER, WTTTC 105C, 600V; DIRECT BURIAL CSA: CIG/TC, 90C, 600V; FT4; IEC 60332-3-22
APPROVAL MARKING ON CONNECTOR	 CSA Class I, Zone 1, Ex de IIC T6*, Class II, Zone 2 Class I, Zone 1, AEx de IIC T6* Class I Division 2 Gr A,B,C,D Class II Division 2 Gr E,F,G ATEX and IECEx II 2 G/D Ex de IIC T6 *@Ta = 40°C

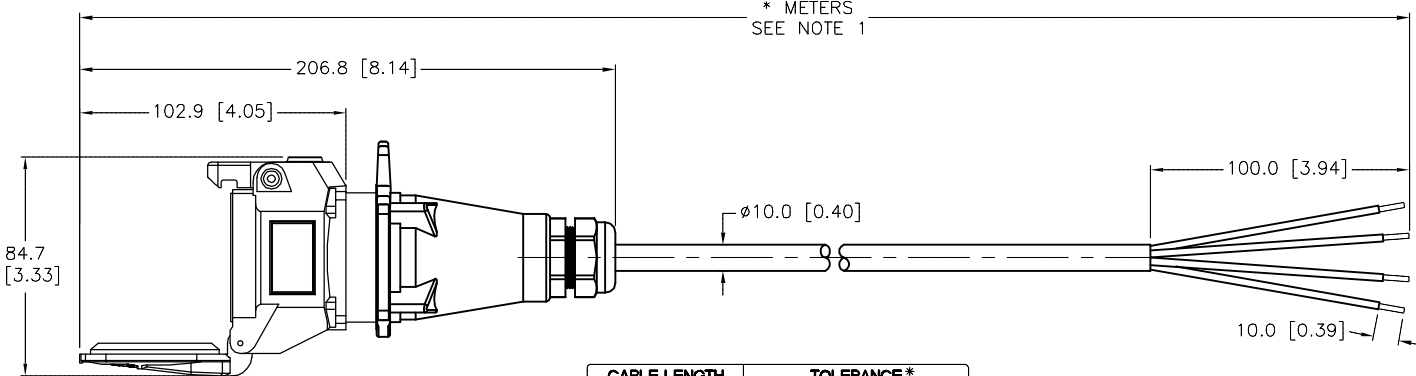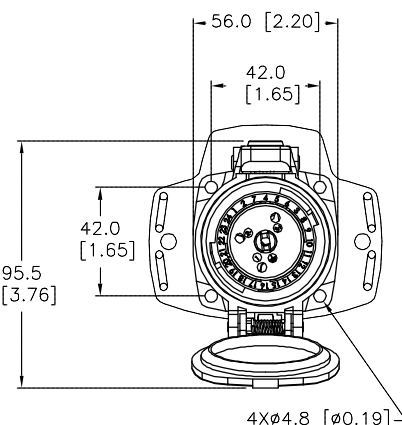


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							
MATERIAL		DRFT NF		DATE 06/24/15		DESCRIPTION	
SEE SPECIFICATIONS		APVD L.H.		SCALE 1=3.0		LHPK-2A-44-*/D	
FINISH		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		C	
C		UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO		TV		08/15/17	
REV		DESCRIPTION		BY		DATE	
						ECO NO.	
						DO NOT SCALE THIS DRAWING	
						FILE: 777035363	
						SHEET 1 OF 1	