



MALE END VIEW



1 = BLACK
2 = RED
3 = WHITE
⊕ = GREEN/YELLOW

SPECIFICATIONS



HOUSING MATERIAL/COLOR	PBT/BLACK
CONTACT MATERIAL/PLATING	NICKEL/SILVER
PROTECTIVE CAP MATERIAL	NEOPRENE
DRAWPLATE MATERIAL	PLASTIC
RATED CURRENT [A]	15 A
RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC
CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
TEMPERATURE RATING	-20°C to +60°C (-4°F to +140°F)
PROTECTION CLASS	MEETS IEC IP66, IP67
CABLE APPROVALS	UL: TC-ER/ITC-ER/PLTC-ER, WTTTC 105C, 600V; DIRECT BURIAL CSA: C/C/TC, 90C, 600V; FT4; IEC 60332-3-22
APPROVAL MARKING ON CONNECTOR	CSA Class I, Zone 1, Ex de IIC T6*, Class II, Zone 21 Class I, Zone 1, AEx de IIC T6* Class I Division 2 Gr A,B,C,D Class II Division 2 Gr E,F,G ATEX and IECEx II 2 G/D Ex de IIC T6 *@Ta = 40°C

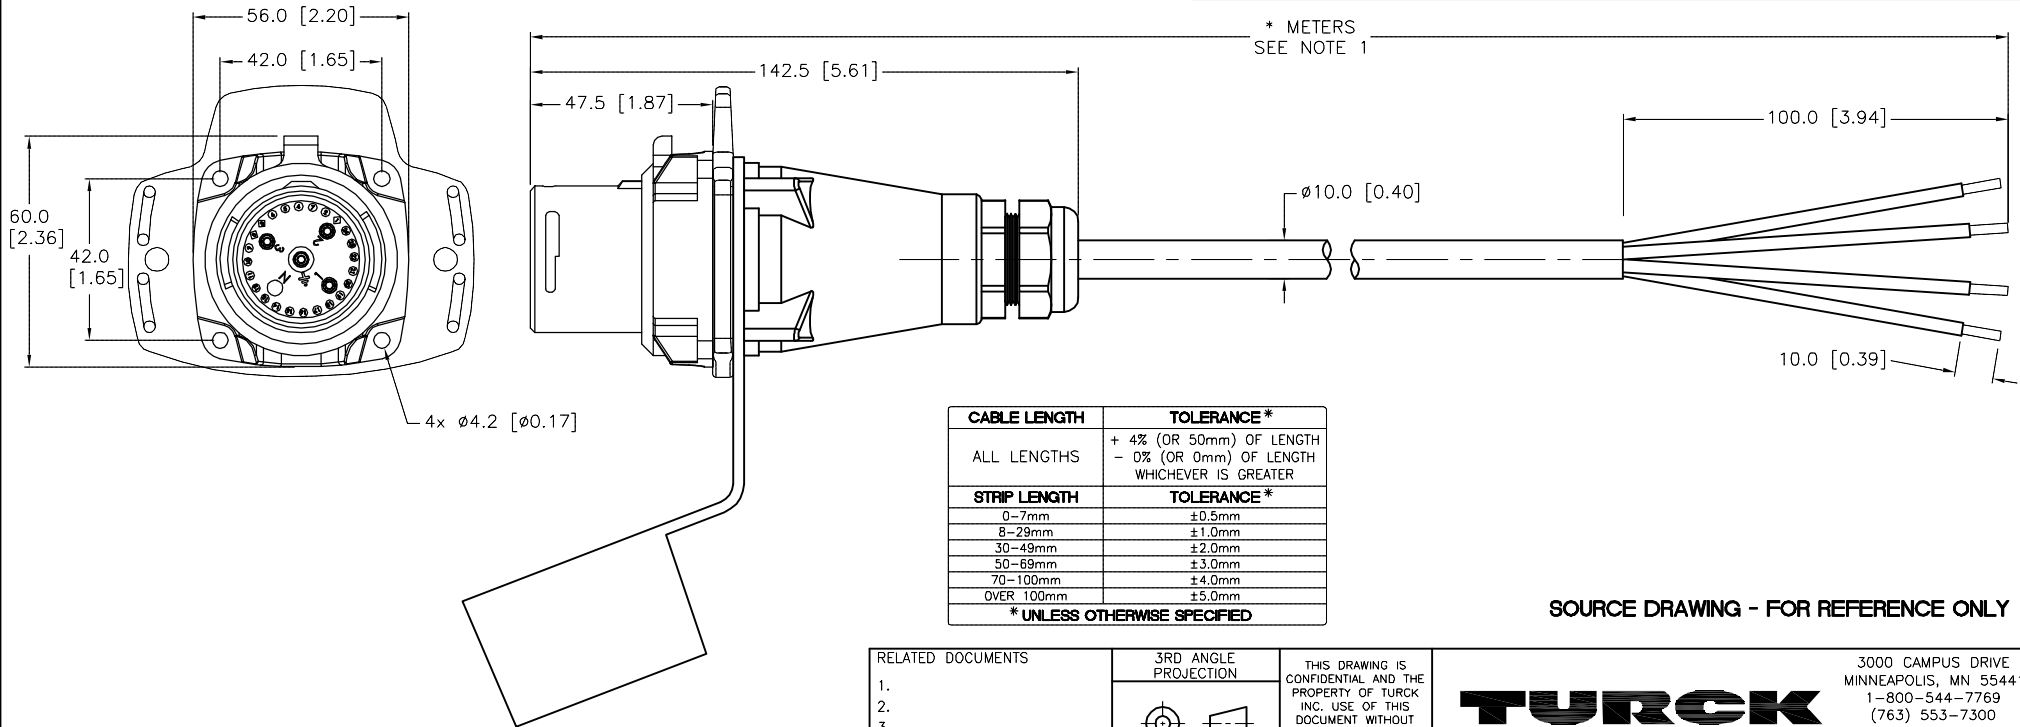

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	NF	DATE	07/08/15		DESCRIPTION	
SEE SPECIFICATIONS			APVD	L.H.	SCALE	1=2.0			LHPS-2A-44-* /D/C
FINISH			CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT				IDENTIFICATION NO.	
SEE SPECIFICATIONS				MILLIMETER [INCH]					C
			DO NOT SCALE THIS DRAWING				FILE: 777035377	SHEET 1 OF 1	