



FEMALE END VIEW



A = GREEN/YELLOW
B = BLACK
C = WHITE

SPECIFICATIONS

DEUTSCH CONNECTOR	DT06-3S-P032
DEUTSCH WEDGELOCK	W3S
DEUTSCH TERMINALS	0462-201-1631
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
RATED CURRENT [A]	10.0 A
OPERATING VOLTAGE [V]	250 V
NUMBER OF CONDUCTORS [AWG]	3x18 AWG
PROTECTION CLASS	IP67, IP69K

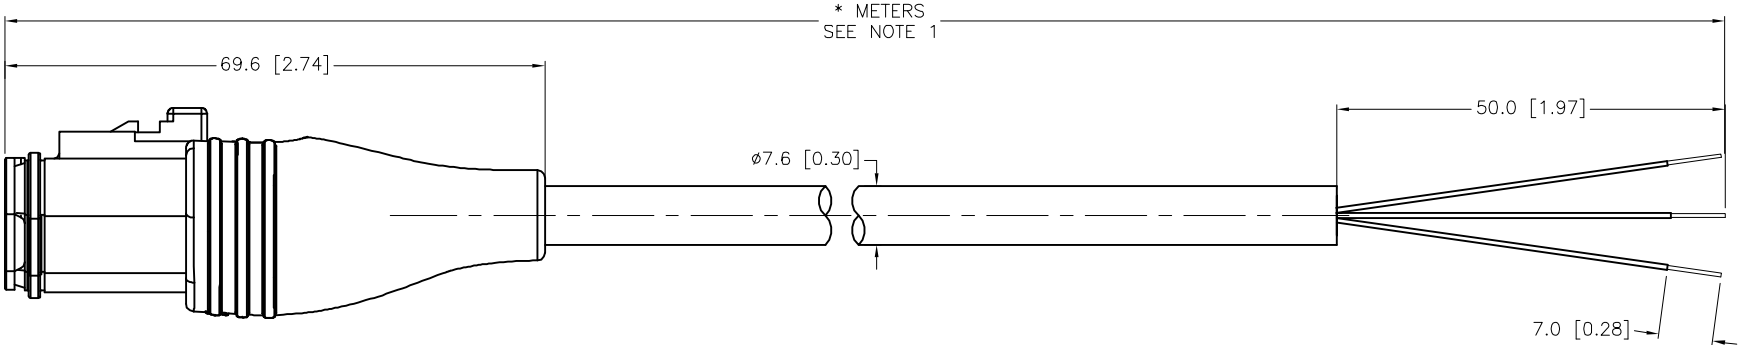

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.


2. "/S2000" DESIGNATES DT GOLD-PLATED TERMINALS.

H	UPDATE RATED CURRENT	TR	02/07/23	78283
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT NF
APVD A.A.

DATE 06/08/15
SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION

DT06-3S-2145-*M/S2000

IDENTIFICATION NO.

REV
H