





FEMALE END VIEW		TYPICAL PANEL CUTOUT	SPECIFICATIONS																											
 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 9 = ORANGE 10 = TAN 11 = BLACK 12 = VIOLET 			<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>NYLON OR TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>HOUSING/LOCKNUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>O-RING MATERIAL</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>30 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPE/BLACK</td></tr><tr><td>CONDUCUTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>12x24 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr><tr><td>MAX. PANEL THICKNESS</td><td>3.0 [0.12]</td></tr></table>		CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	O-RING MATERIAL	NITRILE	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	30 V	OUTER JACKET MATERIAL/COLOR	TPE/BLACK	CONDUCUTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	12x24 AWG	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	MAX. PANEL THICKNESS	3.0 [0.12]
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK																													
CONTACT MATERIAL/PLATING	BRASS/GOLD																													
HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL																													
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																													
O-RING MATERIAL	NITRILE																													
RATED CURRENT [A]	2.0 A																													
RATED VOLTAGE [V]	30 V																													
OUTER JACKET MATERIAL/COLOR	TPE/BLACK																													
CONDUCUTOR INSULATION MATERIAL	POLYESTER ELASTOMER																													
NUMBER OF CONDUCTORS [AWG]	12x24 AWG																													
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																													
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																													
MAX. PANEL THICKNESS	3.0 [0.12]																													

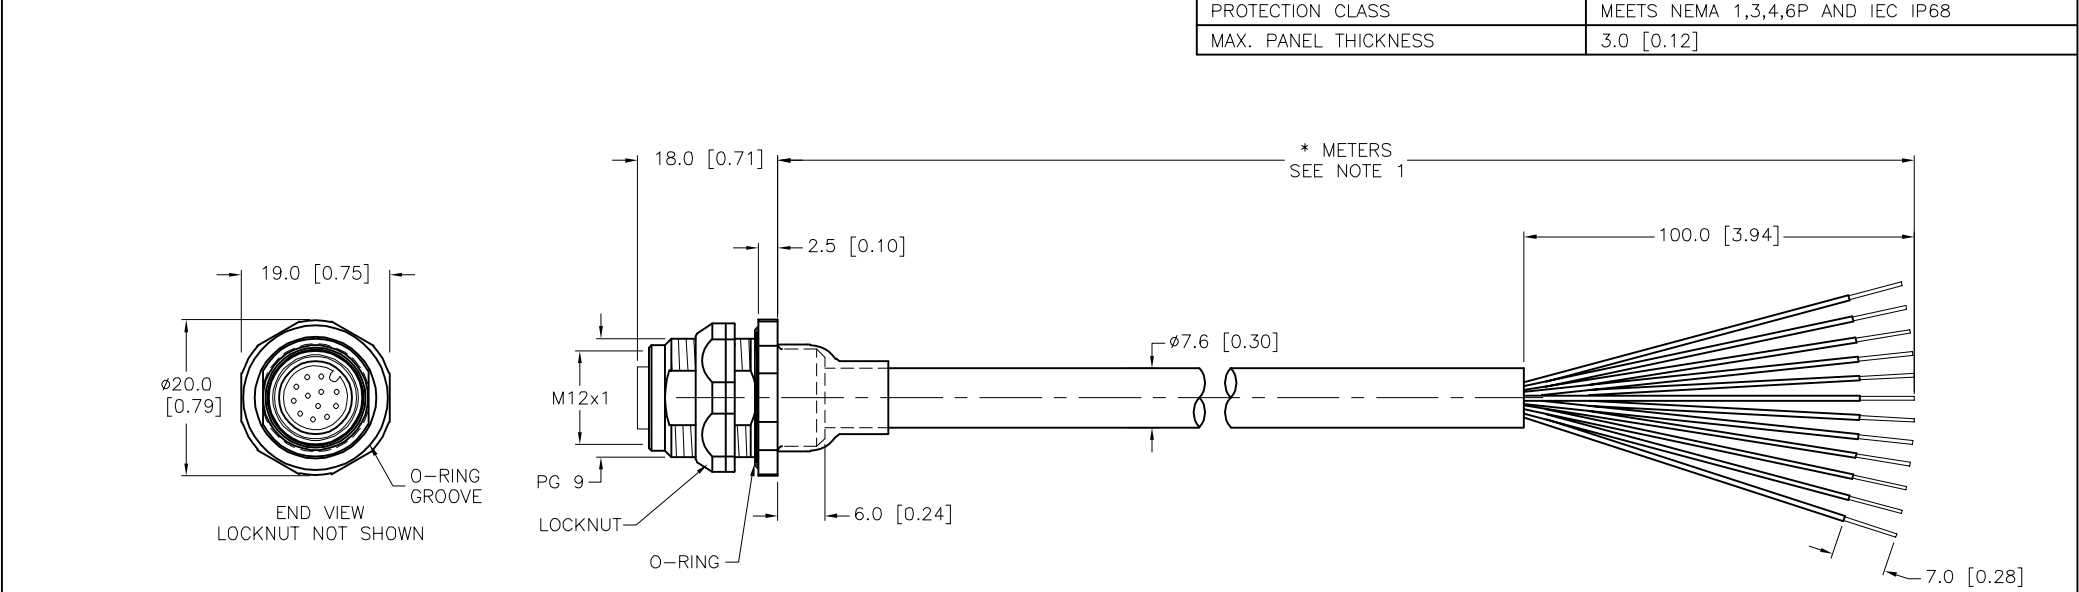

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S101" INDICATES FLEXLIFE-20 AND C-TRACK CABLE.
 - "/S717" DESIGNATES RECEPTACLE ASSEMBLED WITH STANDARD CORDSET CABLE.

D	UPDATE LOCKNUT	NF	05/29/25	81212
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.		TURCK			
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	06/04/15
SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=1.0
FINISH		UNIT OF MEASUREMENT			DESCRIPTION FKFD 12-*/S101/S717
SEE SPECIFICATIONS		MILLIMETER [INCH]			
	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.
					REV D
		FILE: 777035566			SHEET 1 OF 1