




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		CONTACT CARRIER MATERIAL	NYLON OR TPU
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x24 AWG
		TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)

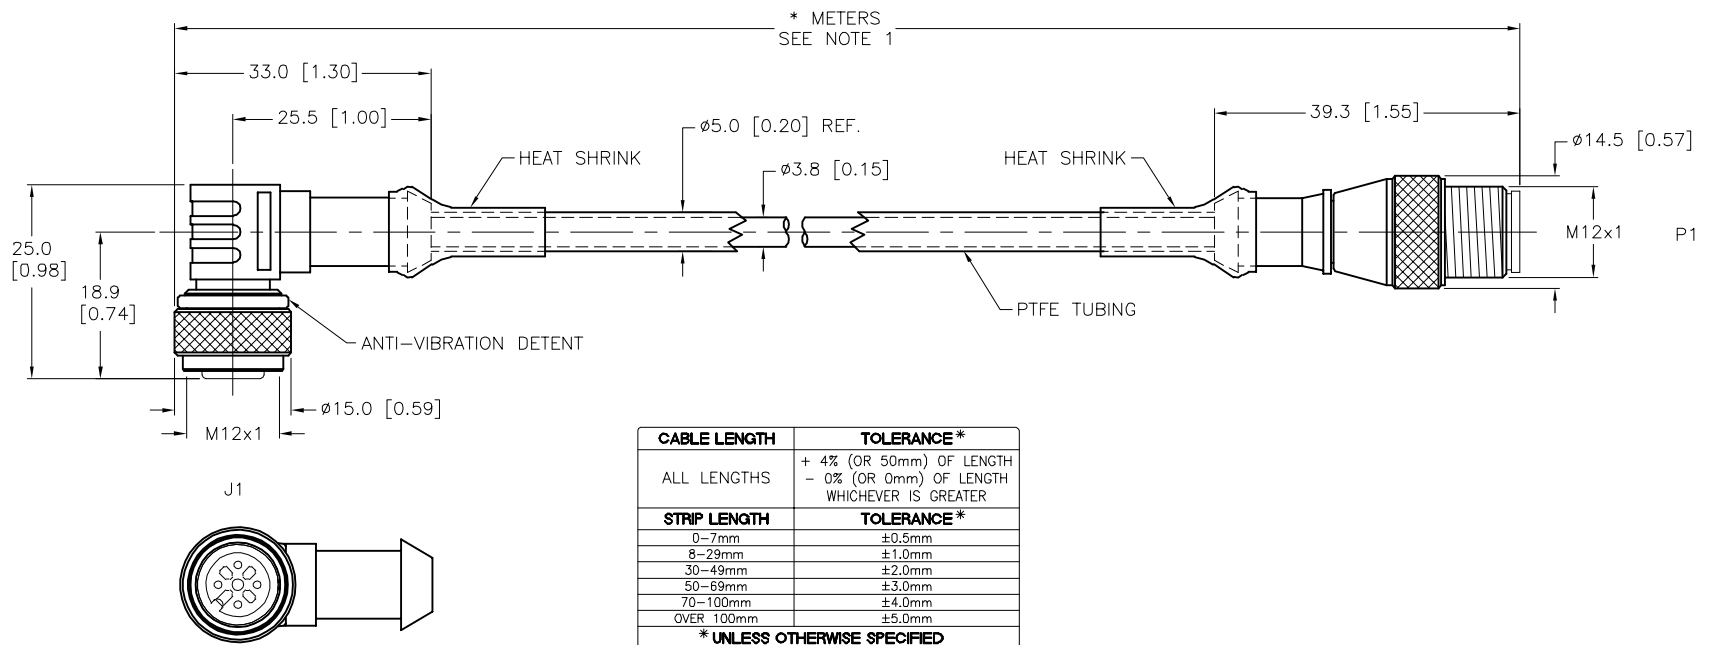


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S1291" DESIGNATES PTFE TUBING AND SPECIAL CABLE.
3. "/SV" DESIGNATES SPECIAL PACKAGING FOR VENDING MACHINES.
4. MAX LENGTH FOR VENDING MACHINE: 3.0 METERS.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1.									
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT	NF	DATE	07/07/15	DESCRIPTION WK 4.4T-*--RS 4.4T/S1291/SV	
3.				APVD	T.S.	SCALE	1=1.0		
4.				UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING					
MATERIAL		SEE SPECIFICATIONS				IDENTIFICATION NO.		REV	
FINISH		SEE SPECIFICATIONS				FILE: 777035696		SHEET 1 OF 1	

A	DRAWING RELEASE	NF	07/15/15	
REV	DESCRIPTION	BY	DATE	ECO. NO.