


MALE END VIEW




PAIR 1 < 1 = WHITE
2 = BROWN
PAIR 2 < 3 = GREEN
4 = YELLOW
PAIR 3 < 5 = GRAY
6 = PINK
PAIR 4 < 7 = BLUE
8 = RED




SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 VAC/75 VDC
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	8x24 AWG (4 TWISTED PAIRS)
DRAIN/SHIELD	24 AWG/FOIL (PAIRS), T-C BRAID (OVERALL)
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

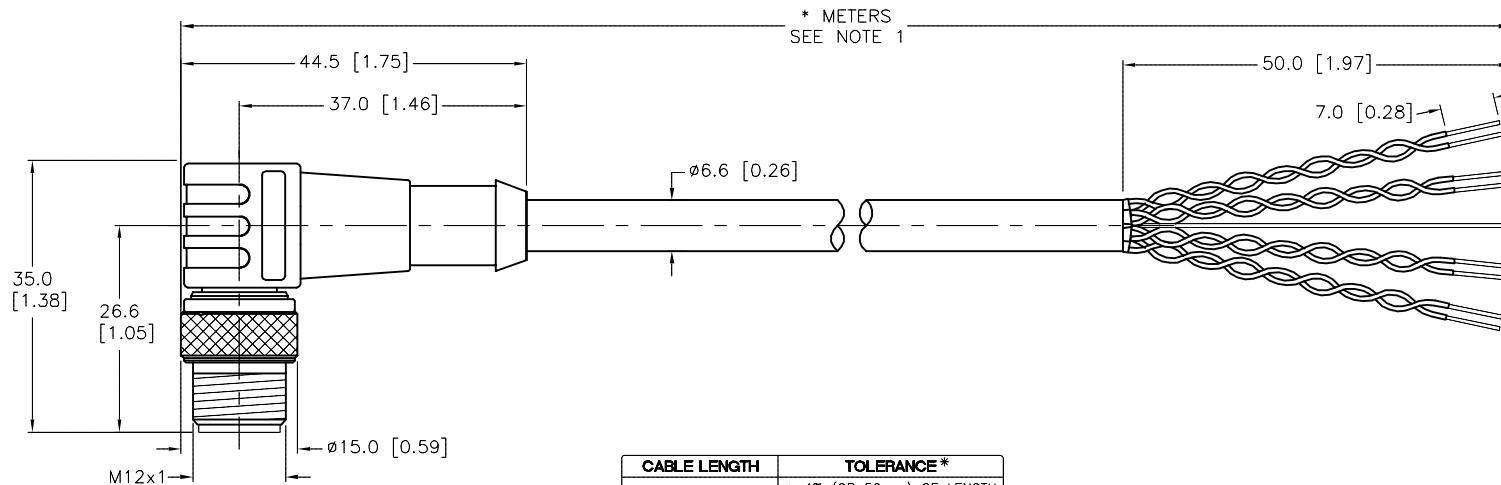

KEYWAY ROTATED 90°
COUNTER-CLOCKWISE
FROM STANDARD




CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/C1135" DESIGNATES RIGHT ANGLE MALE KEYWAY ROTATED 90 DEGREES COUNTER-CLOCKWISE FROM STANDARD.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
1. 2. 3. 4.								
MATERIAL		DRFT TV		DATE 07/20/15		DESCRIPTION E-WSC 8T-264-*/C1135		
SEE SPECIFICATIONS		APVD L.H.		SCALE 1=1.0				
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV
SEE SPECIFICATIONS		MILLIMETER [INCH]						A
		DO NOT SCALE THIS DRAWING				FILE: 777035781		SHEET 1 OF 1

A	DRAWING RELEASE	TV	07/24/15	
REV	DESCRIPTION	BY	DATE	ECO NO.