



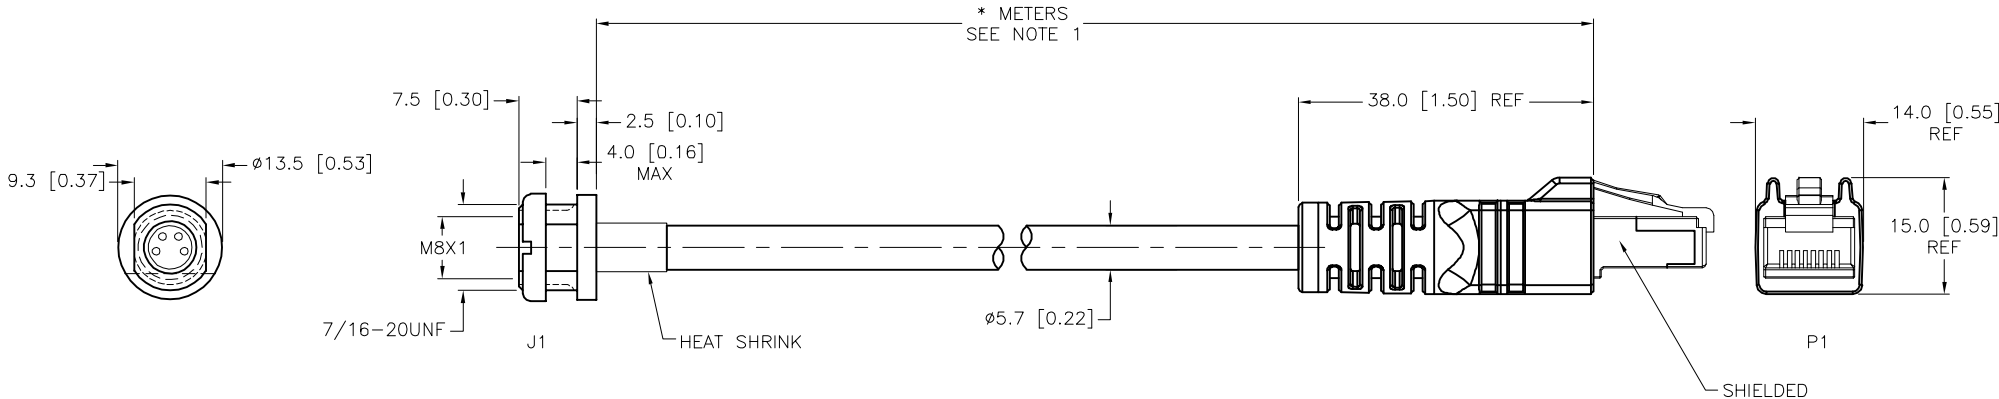





FEMALE END VIEW	RJ45S END VIEW	TYP. PANEL CUTOUT	SPECIFICATIONS																															
 1 = WHITE/ORANGE 2 = WHITE/GREEN 3 = GREEN 4 = ORANGE 	 12345678 1 = WHITE/ORANGE 2 = ORANGE 3 = WHITE/GREEN 4 = N/C 5 = N/C 6 = GREEN 7 = N/C 8 = N/C 		<table><tr><td>CONTACT CARRIER MATERIAL (J1)</td><td>NYLON OR TPU</td></tr><tr><td>CONTACT CARRIER MATERIAL/COLOR (P1)</td><td>POLYCARBONATE/CLEAR</td></tr><tr><td>CONTACT MATERIAL/PLATING (J1)</td><td>BRASS/GOLD</td></tr><tr><td>CONTACT MATERIAL/PLATING (P1)</td><td>BRONZE/GOLD</td></tr><tr><td>HOUSING MATERIAL/PLATING (J1)</td><td>BRASS/NICKEL</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR (P1)</td><td>TPU/BLACK</td></tr><tr><td>O-RING MATERIAL (J1)</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>1.5 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>42 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/TEAL (HALOGEN-FREE)</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PE</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x26 AWG, STRANDED, CAT 5E</td></tr><tr><td>SHIELDING</td><td>ALUM.-POLYESTER FOIL/T-C BRAIDED</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +75°C (-40°F to +167°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, (RJ45: IP20)</td></tr></table>	CONTACT CARRIER MATERIAL (J1)	NYLON OR TPU	CONTACT CARRIER MATERIAL/COLOR (P1)	POLYCARBONATE/CLEAR	CONTACT MATERIAL/PLATING (J1)	BRASS/GOLD	CONTACT MATERIAL/PLATING (P1)	BRONZE/GOLD	HOUSING MATERIAL/PLATING (J1)	BRASS/NICKEL	MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK	O-RING MATERIAL (J1)	NITRILE	RATED CURRENT [A]	1.5 A	RATED VOLTAGE [V]	42 V	OUTER JACKET MATERIAL/COLOR	TPU/TEAL (HALOGEN-FREE)	CONDUCTOR INSULATION MATERIAL	PE	NUMBER OF CONDUCTORS [AWG]	4x26 AWG, STRANDED, CAT 5E	SHIELDING	ALUM.-POLYESTER FOIL/T-C BRAIDED	TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, (RJ45: IP20)	
CONTACT CARRIER MATERIAL (J1)	NYLON OR TPU																																	
CONTACT CARRIER MATERIAL/COLOR (P1)	POLYCARBONATE/CLEAR																																	
CONTACT MATERIAL/PLATING (J1)	BRASS/GOLD																																	
CONTACT MATERIAL/PLATING (P1)	BRONZE/GOLD																																	
HOUSING MATERIAL/PLATING (J1)	BRASS/NICKEL																																	
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK																																	
O-RING MATERIAL (J1)	NITRILE																																	
RATED CURRENT [A]	1.5 A																																	
RATED VOLTAGE [V]	42 V																																	
OUTER JACKET MATERIAL/COLOR	TPU/TEAL (HALOGEN-FREE)																																	
CONDUCTOR INSULATION MATERIAL	PE																																	
NUMBER OF CONDUCTORS [AWG]	4x26 AWG, STRANDED, CAT 5E																																	
SHIELDING	ALUM.-POLYESTER FOIL/T-C BRAIDED																																	
TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)																																	
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, (RJ45: IP20)																																	

 * METERS SEE NOTE 1 9.3 [0.37] 7.5 [0.30] 2.5 [0.10] 4.0 [0.16] MAX 38.0 [1.50] REF 14.0 [0.55] REF 15.0 [0.59] REF Ø13.5 [0.53] M8X1 7/16-20UNF J1 HEAT SHRINK Ø5.7 [0.22] P1 SHIELDED																																									
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> * UNLESS OTHERWISE SPECIFIED					CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm																			
CABLE LENGTH	TOLERANCE*																																								
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																								
STRIP LENGTH	TOLERANCE*																																								
0-7mm	±0.5mm																																								
8-29mm	±1.0mm																																								
30-49mm	±2.0mm																																								
50-69mm	±3.0mm																																								
70-100mm	±4.0mm																																								
OVER 100mm	±5.0mm																																								
NOTES: 1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. MULTIPROTOCOL AND ETHERCAT COMPATIBLE.																																									
SOURCE DRAWING - FOR REFERENCE ONLY																																									
<table><tr><th>RELATED DOCUMENTS</th><th>3RD ANGLE PROJECTION</th></tr><tr><td>1. 2. 3. 4.</td><td></td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	1. 2. 3. 4.		<table><tr><td colspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2">TURCK</td><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</td></tr><tr><td rowspan="2">MATERIAL</td><td>DRFT</td><td>TV</td><td>DATE</td><td>08/17/15</td><td rowspan="2">DESCRIPTION MFKS 4F RJ45S 4413-*M</td></tr><tr><td>APVD</td><td>A.A.</td><td>SCALE</td><td>1=1.0</td></tr><tr><td rowspan="2">FINISH</td><td colspan="2">UNIT OF MEASUREMENT MILLIMETER [INCH]</td><td colspan="2">IDENTIFICATION NO.</td><td rowspan="3">REV C</td></tr><tr><td colspan="2">CONTACT TURCK FOR MORE INFORMATION</td><td colspan="3">DO NOT SCALE THIS DRAWING</td></tr><tr><td colspan="2"></td><td colspan="2">FILE: 777035940</td><td colspan="2">SHEET 1 OF 1</td></tr></table>			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		MATERIAL	DRFT	TV	DATE	08/17/15	DESCRIPTION MFKS 4F RJ45S 4413-*M	APVD	A.A.	SCALE	1=1.0	FINISH	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV C	CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING					FILE: 777035940		SHEET 1 OF 1	
RELATED DOCUMENTS	3RD ANGLE PROJECTION																																								
1. 2. 3. 4.																																									
THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																					
MATERIAL	DRFT	TV	DATE	08/17/15	DESCRIPTION MFKS 4F RJ45S 4413-*M																																				
	APVD	A.A.	SCALE	1=1.0																																					
FINISH	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV C																																				
	CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING																																						
		FILE: 777035940		SHEET 1 OF 1																																					