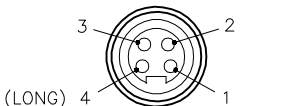

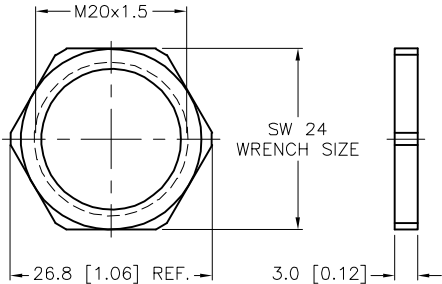
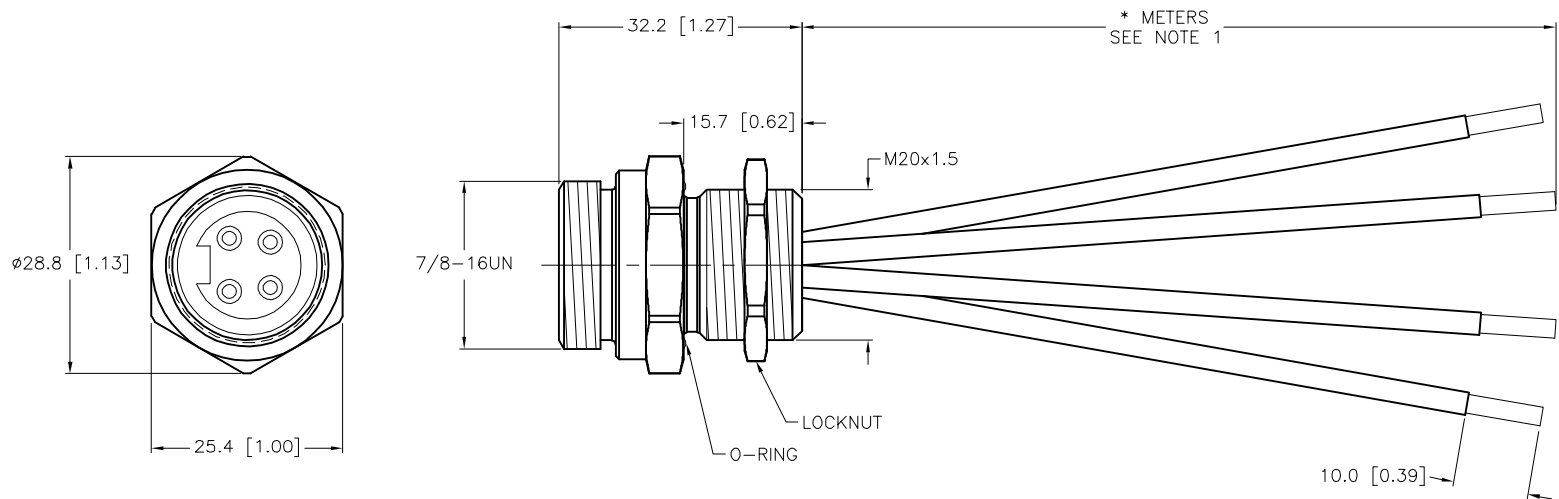



MALE END VIEW	LOCKNUT	SPECIFICATIONS																							
<div data-bbox="65 168 344 272">  <p>(LONG)</p> <p>1 = BLACK 2 = WHITE 3 = RED 4 = GREEN/YELLOW</p> </div> <div data-bbox="65 453 243 488">  </div>	<div data-bbox="443 159 882 440">  </div>	<table> <tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>PVC</td></tr> <tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr> <tr><td>HOUSING MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr> <tr><td>O-RING MATERIAL</td><td>NITRILE</td></tr> <tr><td>RATED CURRENT [A]</td><td>18.0 A</td></tr> <tr><td>RATED VOLTAGE [V]</td><td>600 VAC</td></tr> <tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr> <tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x14 AWG</td></tr> <tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr> <tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K</td></tr> <tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, CE</td></tr> </table>		CONTACT CARRIER MATERIAL/COLOR	PVC	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING MATERIAL/PLATING	BRASS/NICKEL	O-RING MATERIAL	NITRILE	RATED CURRENT [A]	18.0 A	RATED VOLTAGE [V]	600 VAC	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x14 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K	APPROVALS AND CERTIFICATIONS	UL 2237, CE
CONTACT CARRIER MATERIAL/COLOR	PVC																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
HOUSING MATERIAL/PLATING	BRASS/NICKEL																								
O-RING MATERIAL	NITRILE																								
RATED CURRENT [A]	18.0 A																								
RATED VOLTAGE [V]	600 VAC																								
CONDUCTOR INSULATION MATERIAL	PVC																								
NUMBER OF CONDUCTORS [AWG]	4x14 AWG																								
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																								
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K																								
APPROVALS AND CERTIFICATIONS	UL 2237, CE																								



CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

 **CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:				RELATED DOCUMENTS				3RD ANGLE PROJECTION				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.								3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				2. PANEL CUTOUT RECOMMENDATION: 21mm DIAMETER.				1.				DRFT TV				DATE 08/18/15				DESCRIPTION			
								2.				APVD L.H.				SCALE 1=1.0				RSF 44-*M/M20 W/LN			
								3.				UNIT OF MEASUREMENT				IDENTIFICATION NO.				REV			
								4.				MILLIMETER [INCH]								H			
												DO NOT SCALE THIS DRAWING				FILE: 777035942				SHEET 1 OF 1			
H UPDATE NOTES				RDS 05/21/21 76753				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY															
REV DESCRIPTION				BY DATE ECO NO.				CONTACT TURCK FOR MORE INFORMATION															