


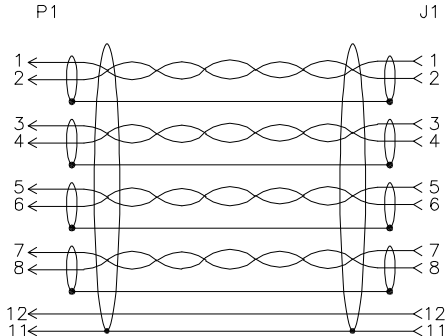

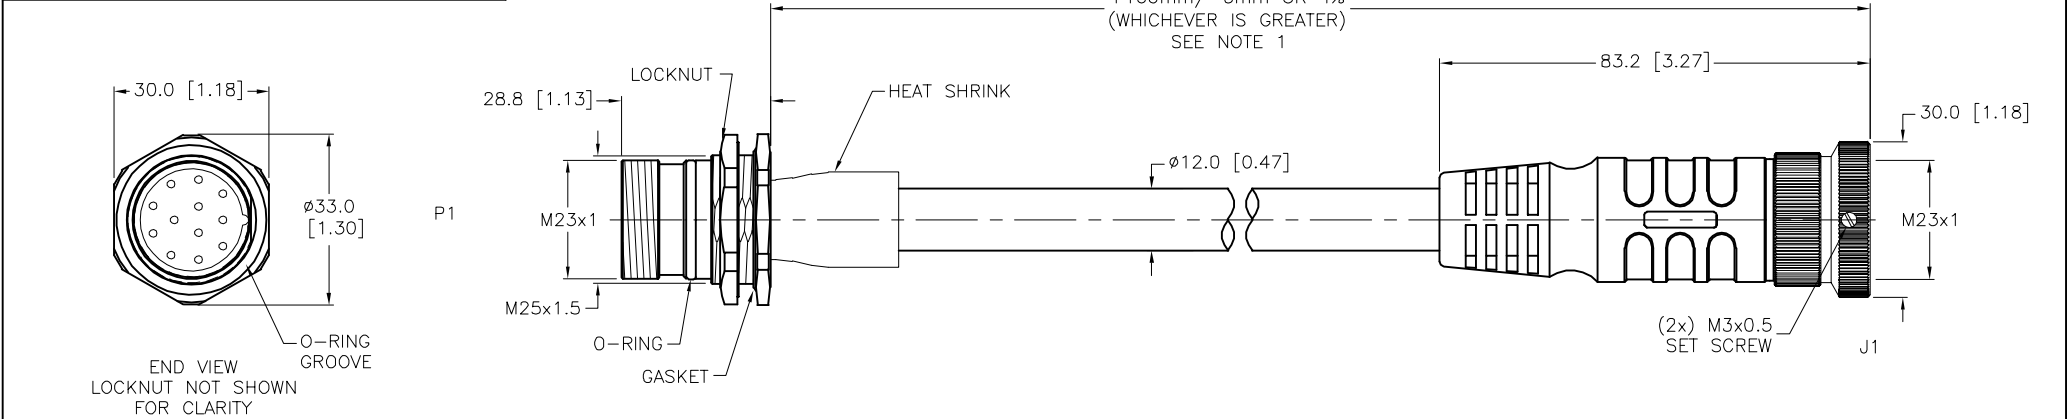


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																																
 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = RED/WHT 7 = WHT/ORG 8 = ORG/WHT 9 = N/C 10 = N/C 11 = DRAIN 12 = GRN/YEL				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON or PBT</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MAT'L/FINISH (P1)</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>HOUSING MATERIAL/FINISH (J1)</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>150 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>9x18 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>5x20 AWG DRAINS/FOIL SHIELD</td></tr><tr><td>CONDUCTOR ARRANGEMENT</td><td>4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>IEC IP67</td></tr><tr><td>CABLE RATINGS</td><td>UL: ITC-ER, DIRECT BURIAL/PLTC-ER, 105C, 300V CSA: CIC, 90C, 300V</td></tr><tr><td>MAXIMUM PANEL THICKNESS</td><td>6.5 [0.256]</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON or PBT	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MAT'L/FINISH (P1)	STAINLESS STEEL/PASSIVATED	HOUSING MATERIAL/FINISH (J1)	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	150 V	OUTER JACKET MATERIAL/COLOR	PVC/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	9x18 AWG	DRAIN/SHIELD	5x20 AWG DRAINS/FOIL SHIELD	CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	IEC IP67	CABLE RATINGS	UL: ITC-ER, DIRECT BURIAL/PLTC-ER, 105C, 300V CSA: CIC, 90C, 300V	MAXIMUM PANEL THICKNESS	6.5 [0.256]
CONTACT CARRIER MATERIAL	NYLON or PBT																																			
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																																			
CONTACT MATERIAL/PLATING	BRASS/GOLD																																			
COUPLING NUT MAT'L/FINISH (P1)	STAINLESS STEEL/PASSIVATED																																			
HOUSING MATERIAL/FINISH (J1)	STAINLESS STEEL/PASSIVATED																																			
RATED CURRENT [A]	4.0 A																																			
RATED VOLTAGE [V]	150 V																																			
OUTER JACKET MATERIAL/COLOR	PVC/BLACK																																			
CONDUCTOR INSULATION MATERIAL	PVC																																			
NUMBER OF CONDUCTORS [AWG]	9x18 AWG																																			
DRAIN/SHIELD	5x20 AWG DRAINS/FOIL SHIELD																																			
CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN																																			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																																			
PROTECTION CLASS	IEC IP67																																			
CABLE RATINGS	UL: ITC-ER, DIRECT BURIAL/PLTC-ER, 105C, 300V CSA: CIC, 90C, 300V																																			
MAXIMUM PANEL THICKNESS	6.5 [0.256]																																			
 M23 connector		 M23 connector																																		
PANEL CUTOUT (TYPICAL)																																				
																																				



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					1. 2. 3. 4.				DRFT NF		DATE 04/17/15	
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD C.K.		SCALE 1=1.5	
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
					SEE SPECIFICATIONS				MILLIMETER [INCH]		P-CSFDV CKMT 12-489-*	
					SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
											REV	
											B	
											FILE: 777036029	
											SHEET 1 OF 1	