




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY 	CONTACT CARRIER MATERIAL/COLOR	TPV/BLACK
		MOLDED HEAD MATERIAL/COLOR	TPV/WHITE
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		CABLE JACKET MATERIAL/COLOR	TPV/WHITE
		CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
		NUMBER OF CONDUCTORS [AWG]	5x22 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

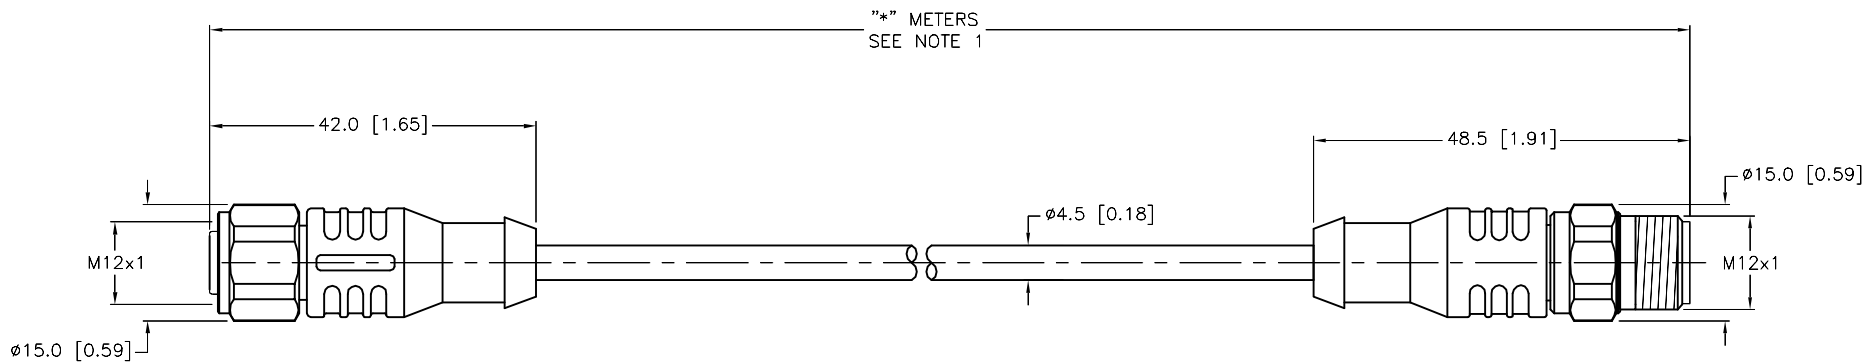


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S3136" DESIGNATES CONNECTOR WITH SILICONE O-RING.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com					
1. 2. 3. 4.									
MATERIAL		DRFT	NF	DATE	09/17/15	DESCRIPTION WD-RKCV 4.5T-*--RSCV 4.5T/S3136			
SEE SPECIFICATIONS		APVD	K.Y.	SCALE	1=1.0				
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV A	
SEE SPECIFICATIONS									
		DO NOT SCALE THIS DRAWING				FILE: 777036120		SHEET 1 OF 1	

A	DRAWING RELEASE	NF	09/24/15	
REV	DESCRIPTION	BY	DATE	ECO NO.