

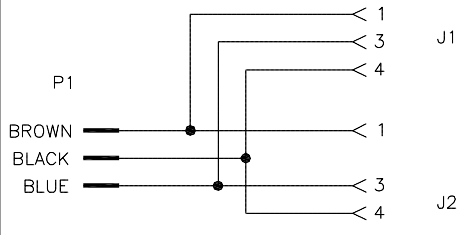



FEMALE END VIEW		WIRING DIAGRAM		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	TPE/GRAY
				CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
				NUMBER OF CONDUCTOR [AWG]	3x22 AWG
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

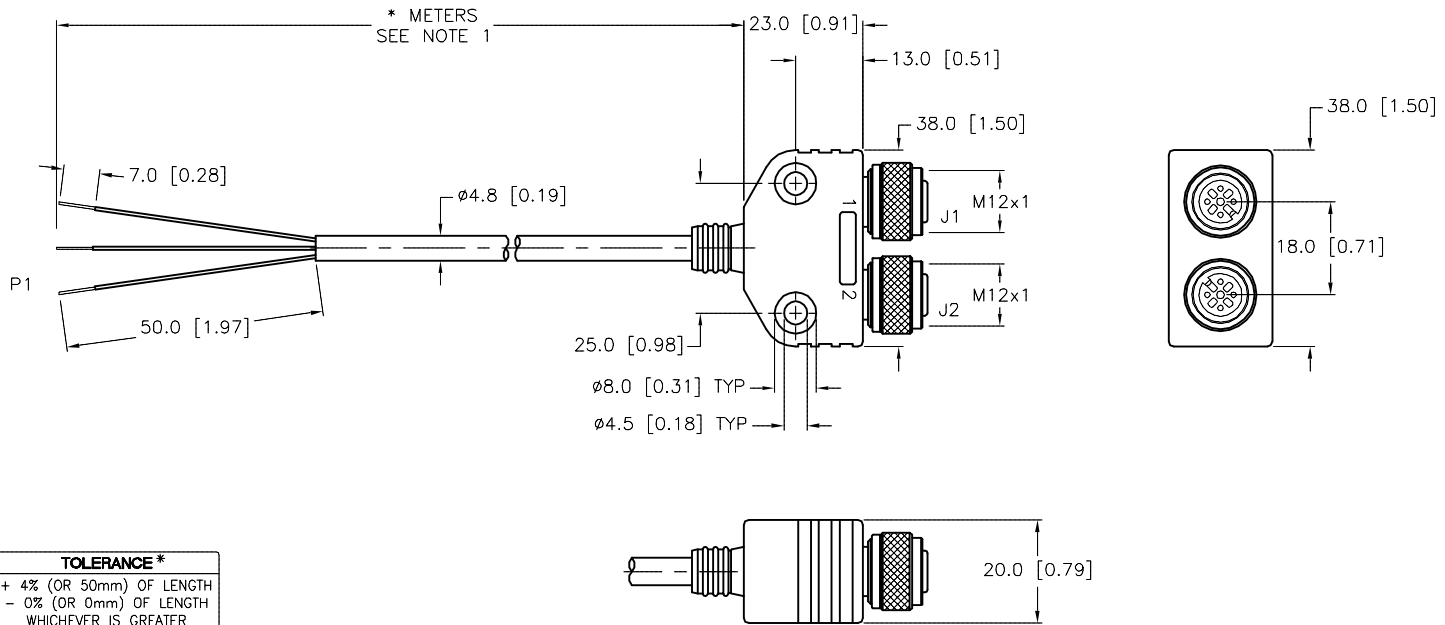

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S651" DESIGNATES PARALLEL WIRING.
- "/S101" DESIGNATES FLEXLIFE-20 CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT NF		DATE 09/22/15	
MATERIAL		SEE SPECIFICATIONS		APVD L.H.		SCALE 1=1.5	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETER [INCH]		VB2-*/2FKM 4/S651/S101	
				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
						REV A	
A DRAWING RELEASE		NF 10/01/15				FILE: 777036138	
REV DESCRIPTION		BY DATE ECO NO.				SHEET 1 OF 1	