






MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS																							
 <div>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</div>	 <div>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</div>	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>9.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPE/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x18 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P,12 &amp; IECIP67, IP68,IP69,IP69K</td></tr></table>	CONTACT CARRIER MATERIAL	TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	9.0 A	RATED VOLTAGE [V]	600 V	OUTER JACKET MATERIAL/COLOR	TPE/YELLOW	CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	4x18 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K	
CONTACT CARRIER MATERIAL	TPU																								
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																								
RATED CURRENT [A]	9.0 A																								
RATED VOLTAGE [V]	600 V																								
OUTER JACKET MATERIAL/COLOR	TPE/YELLOW																								
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER																								
NUMBER OF CONDUCTORS [AWG]	4x18 AWG																								
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																								
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K																								
																									



SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
  2. "/S101" INDICATES FLEXLIFE-20 AND C-TRACK CABLE.
  3. "/S1077" DESIGNATES SILICONE TUBING PLACED OVER CABLE JACKET. TUBING TO BE ASSEMBLED OVER CABLE JACKET PRIOR TO SOLDERING/CRIMPING AND MAXIMUM LENGTH OF 4.0 METERS.

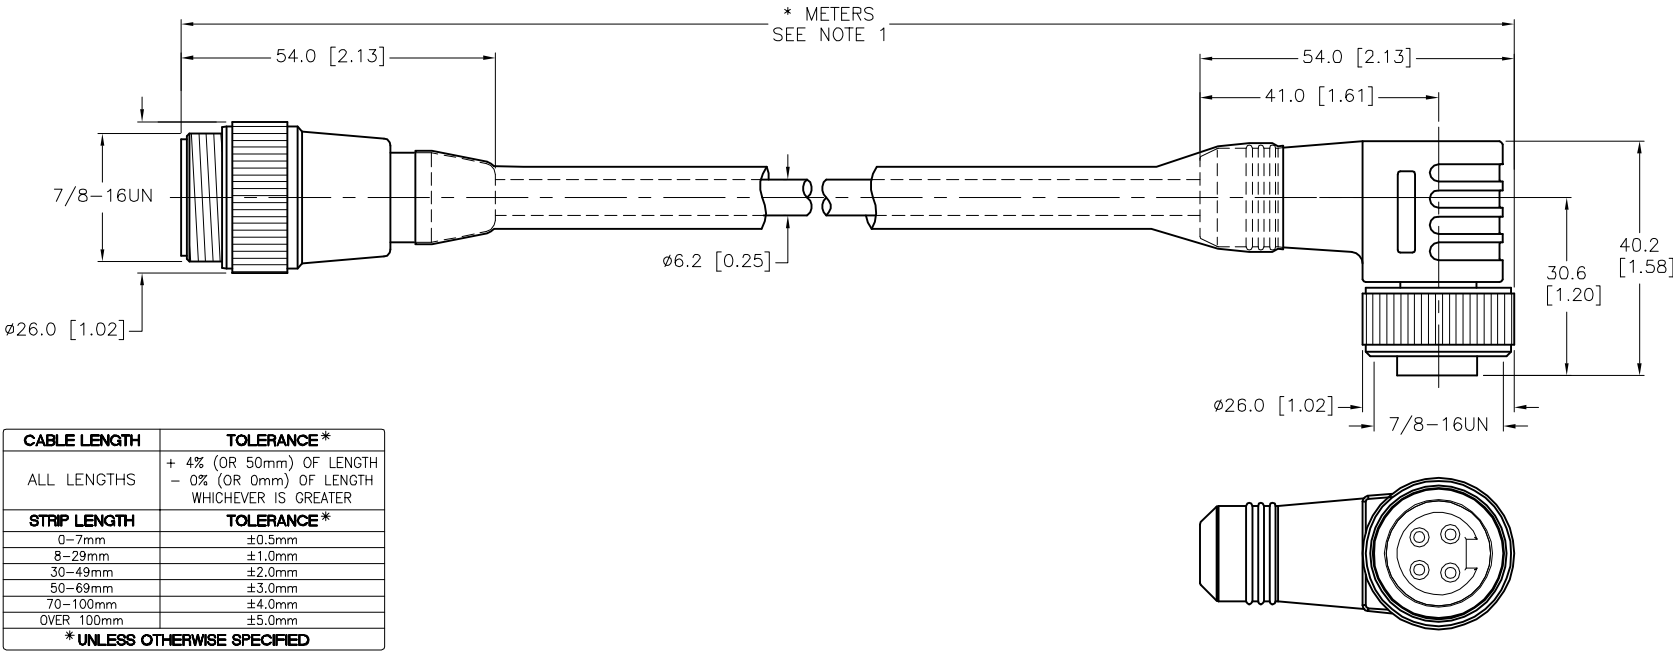B	UPDATE PROTECTION CLASS	CBM	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DRFT NF	DATE 09/22/15	DESCRIPTION
1.			APVD L.H.	SCALE 1=1.3	RSM WKM 40-*M/S101/S1077
2.					
3.					
4.					
MATERIAL	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT	IDENTIFICATION NO.	REV
FINISH	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [ INCH ]		B
			DO NOT SCALE THIS DRAWING	FILE: 777036140	SHEET 1 OF 1