


MALE END VIEW





A = WHITE w/BLK#1	W = ORANGE w/BLK#20
B = WHITE w/BLK#2	X = LT. BLUE w/BLK#21
C = WHITE w/BLK#3	Y = LT. BLUE w/BLK#22
D = WHITE w/BLK#4	Z = LT. BLUE w/BLK#23
E = WHITE w/BLK#5	a = LT. BLUE w/BLK#24
F = YELLOW w/BLK#6	b = LT. BLUE w/BLK#25
G = YELLOW w/BLK#7	c = LT. GRN w/BLK#26
H = YELLOW w/BLK#8	d = LT. GRN w/BLK#27
J = YELLOW w/BLK#9	e = LT. GRN w/BLK#28
K = YELLOW w/BLK#10	f = LT. GRN w/BLK#29
L = PINK w/BLK#11	g = LT. GRN w/BLK#30
M = PINK w/BLK#12	h = TAN w/BLK#31
N = PINK w/BLK#13	j = TAN w/BLK#32
P = PINK w/BLK#14	k = TAN w/BLK #33
R = PINK w/BLK#15	l = TAN w/BLK #34
S = ORANGE w/BLK#16	m = TAN w/BLK #35
T = ORANGE w/BLK#17	n = N/C
U = ORANGE w/BLK#18	
V = ORANGE w/BLK#19	

CONNECTOR
TYPE/STYLE - MS 3110 A
SHELL SIZE - 22
INSERT ARRANGEMENT - 36P

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NEOPRENE
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS	35x20 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68
CONNECTOR TYPE	MIL-DTL-26482

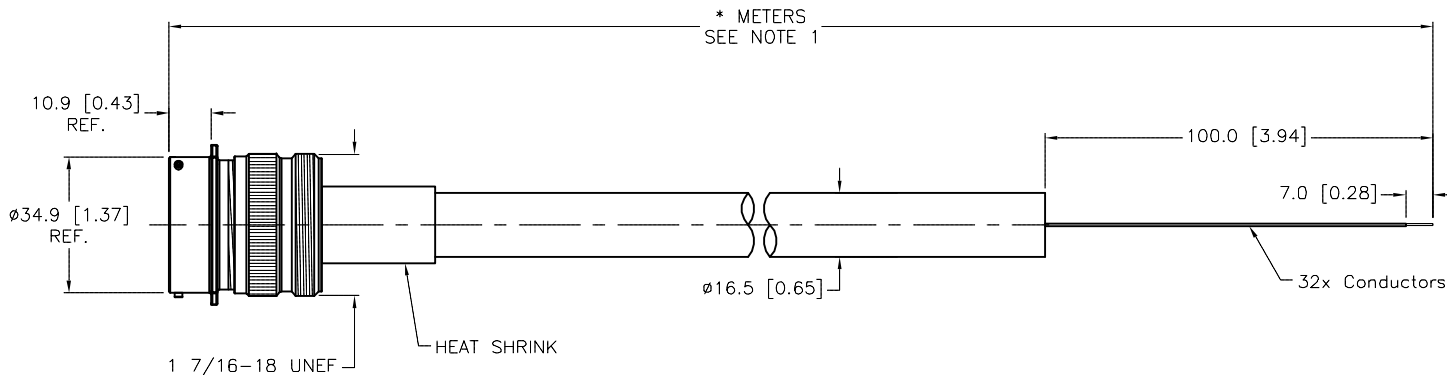



CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.
- "/S717" DESIGNATES RECEPTACLE ASSEMBLED WITH JACKETED CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	NF	DATE	07/23/15	DESCRIPTION MS 3110A-22-36P-2028-*/S717	
APVD			C.K.	SCALE	1=2.0			
FINISH			UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. REV B	
SEE SPECIFICATIONS			DO NOT SCALE THIS DRAWING					
			CONTACT TURCK FOR MORE INFORMATION	FILE: 777036413				SHEET 1 OF 1

B	UPDATE MALE END KEYWAY	NF	05/11/16	54686
REV	DESCRIPTION	BY	DATE	ECO NO.