



FEMALE END VIEW



1 = WHITE
2 = BLACK

SPECIFICATIONS

DEUTSCH CONNECTOR	DT06-2S-E008
DEUTSCH WEDGELOCK	W2S
DEUTSCH TERMINALS	0462-201-16141
RATED CURRENT (A)	12.0 A
OPERATING VOLTAGE [V]	250 V
MOLDED HEAD MATERIAL/COLOR	TPU/RED
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	2x18 AWG
PROTECTION CLASS	IP67, IP69K

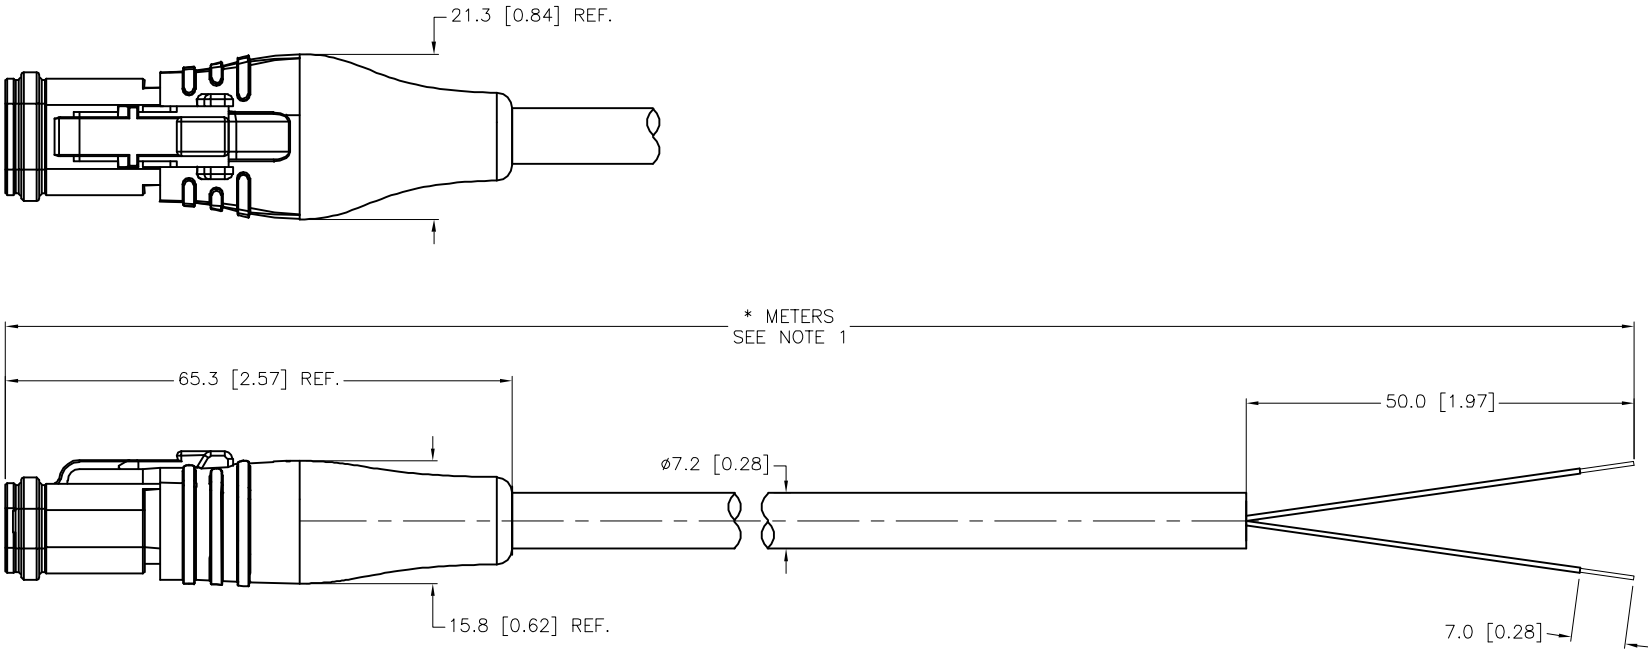

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.


2. "/S1055" DESIGNATES RED MOLD BODY.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT TV

APVD C.K.

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DESCRIPTION

DT06-2S-2125-*M/S1055

IDENTIFICATION NO.

REV

DO NOT SCALE THIS DRAWING

FILE: 777036440

SHEET 1 OF 1

E	ADDED OPERATING VOLTAGE	ER	04/25/22	77567
REV	DESCRIPTION	BY	DATE	ECO NO.