




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE 	 1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE 	CONTACT CARRIER MATERIAL	NYLON
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	3x18 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6 AND IEC IP67, IP68, IP69K

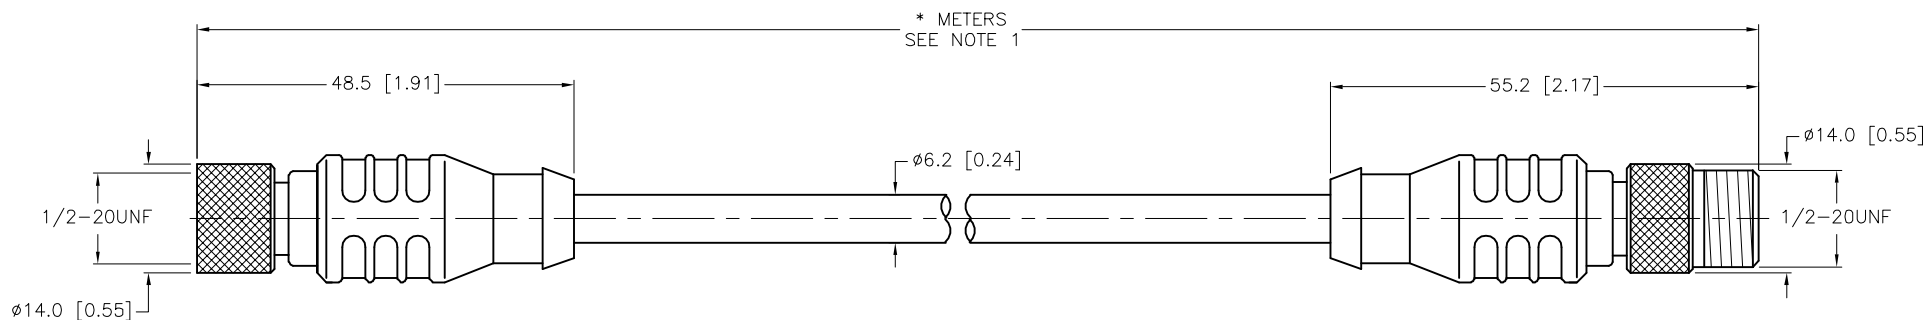


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±6.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S760" DESIGNATES BLACK JACKETED CABLE.
- "/S771" DESIGNATES BLACK MOLDED PLUG BODY MATERIAL.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT NF		DATE 10/28/15	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD T.S.		SCALE 1=1.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION KBE 3T-*--SBE 3T/S760/S771	
B UPDATE CONDUCTOR COLOR					NF 01/25/18		60908		IDENTIFICATION NO.	
REV DESCRIPTION					BY DATE		ECO NO.		REV B	
									DO NOT SCALE THIS DRAWING	
									FILE: 777036510	
									SHEET 1 OF 1	