


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	30 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	12x24 AWG
DRAIN/SHIELD	26 AWG/ALUMPOLYESTER FOIL & T-C BRAIDED
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP67

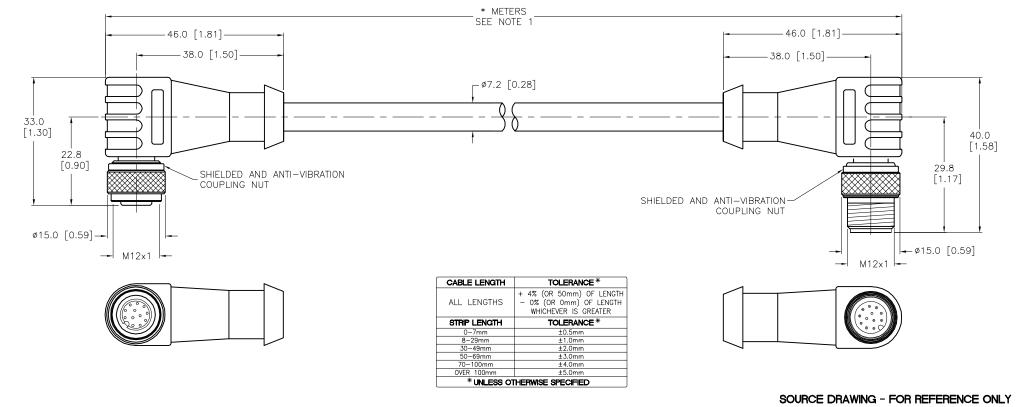

## NOTES:

- 1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. COUPLING NUT IS CONNECTED TO SHIELD.

UPDATE VOLTAGE RATING

DESCRIPTION

	4.
	MATERIAL
	SEE SPECIFICATIONS
	FINISH
78300	SEE SPECIFICATIONS
ECO NO.	

CBM 02/21/23

DATE

2.

3.

RELATED DOCUMENTS 3RD ANGLE PROJECTION ALL DIMENSIONS SPECIFICATIONS

DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION

DESCRIPTION

FILE: 777036524

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax

SHEET 1 OF 1

DATE 11/03/15 RDS SCALE 1=1.0 T.S.

UNIT OF MEASUREMENT

THIS DRAWING IS CONFIDENTIAL AND THE

PROPERTY OF TURCK INC. USE OF THIS

DOCUMENT WITHOUT WRITTEN PERMISSION IS

MILLIMETER [ INCH ] DO NOT SCALE THIS DRAWING

www.turck.us

WKS 12T-\*-WSS 12T

IDENTIFICATION NO. REV