



MALE END VIEW



1 = YELLOW  
2 = GREEN

| SPECIFICATIONS                |                                                    |
|-------------------------------|----------------------------------------------------|
| DEUTSCH CONNECTOR             | DT04-2P-C015                                       |
| DEUTSCH WEDGE LOCK            | W2P                                                |
| DEUTSCH TERMINALS             | 0460-202-16141                                     |
| MOLDED HEAD MATERIAL/COLOR    | TPU/BLACK                                          |
| OUTER JACKET MATERIAL/COLOR   | EX60/BLACK                                         |
| CONDUCTOR INSULATION MATERIAL | XLPE                                               |
| NUMBER OF CONDUCTORS [AWG]    | 2x20 AWG                                           |
| RATED CURRENT                 | 8.0 A                                              |
| OPERATING VOLTAGE             | 250 V                                              |
| CABLE CONSTRUCTION            | TWISTED PAIR MEETING J1939 ELECTRICAL REQUIREMENTS |
| PROTECTION CLASS              | IP67                                               |

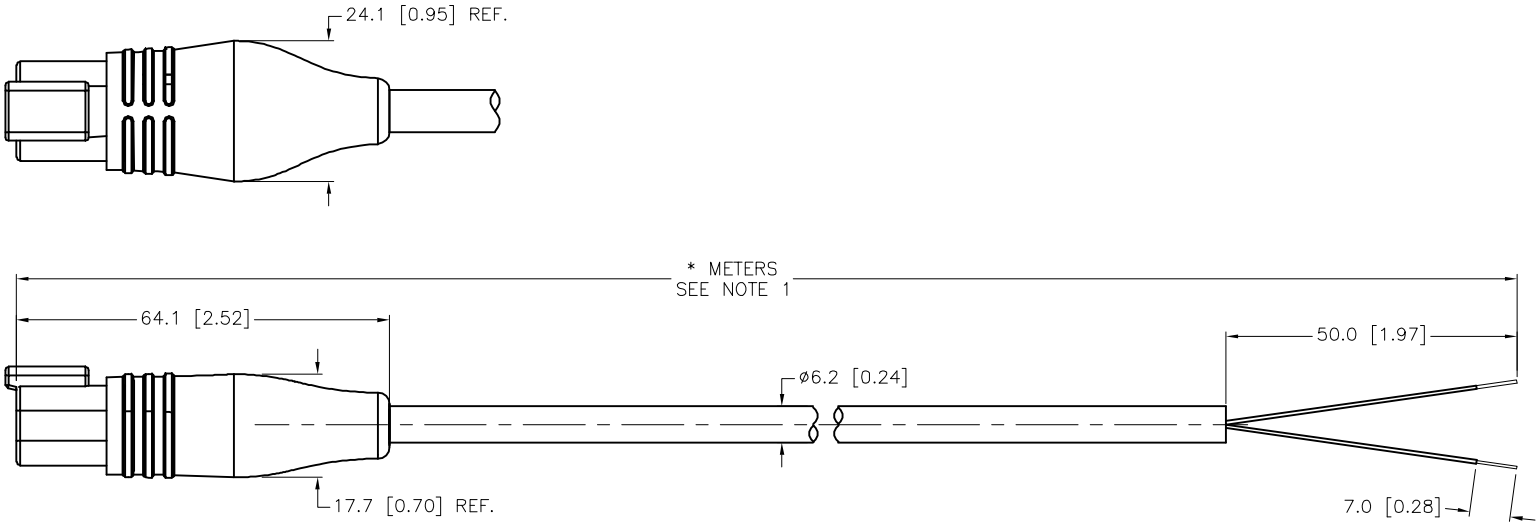

| CABLE LENGTH                 | TOLERANCE *                                                                 |
|------------------------------|-----------------------------------------------------------------------------|
| ALL LENGTHS                  | + 4% (OR 50mm) OF LENGTH<br>- 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| STRIP LENGTH                 | TOLERANCE *                                                                 |
| 0-7mm                        | ±0.5mm                                                                      |
| 8-29mm                       | ±1.0mm                                                                      |
| 30-49mm                      | ±2.0mm                                                                      |
| 50-69mm                      | ±3.0mm                                                                      |
| 70-100mm                     | ±4.0mm                                                                      |
| OVER 100mm                   | ±5.0mm                                                                      |
| * UNLESS OTHERWISE SPECIFIED |                                                                             |

NOTES:


1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.  
2.  
3.  
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT TV  
APVD C.K.

DATE 08/18/15  
SCALE 1=1.3

UNIT OF MEASUREMENT  
MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

DESCRIPTION  
DT04-2P-2322XL-\*M

IDENTIFICATION NO.

REV  
D

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
www.turck.us

|     |                         |    |          |         |
|-----|-------------------------|----|----------|---------|
| D   | ADDED OPERATING VOLTAGE | ER | 04/25/22 | 77567   |
| REV | DESCRIPTION             | BY | DATE     | ECO NO. |

|                                    |                 |              |
|------------------------------------|-----------------|--------------|
| CONTACT TURCK FOR MORE INFORMATION | FILE: 777036708 | SHEET 1 OF 1 |
|------------------------------------|-----------------|--------------|