
FEMALE	END VIEW
16 6 15 19 5 4 17 6 6 6 7 17 6 6 7 10 7 7	1 = WHITE/BLACK 2 = BLACK/WHITE 3 = WHITE/GREEN 4 = GREEN/WHITE 5 = GRAY 6 = WHITE/RED 7 = N/C 8 = RED/WHITE 9 = WHITE/ORANGE 10 = ORANGE WHITE 11 = WHITE/BLUE 12 = GREEN/YELLOW 13 = BLUE/WHITE 14 = WHITE/BROWN 15 = BROWN/WHITE
iast.	16 = WHITE/YELLOW 17 = YELLOW/WHITE 18 = WHITE/VIOLET 19 = VIOLET/WHITE

SPECIFICATIONS				
CONTACT CARRIER MATERIAL	TPU			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
RATED CURRENT [A]	4.0 A (PINS 5,7,12), 2.0 A (ALL OTHERS)			
RATED VOLTAGE [V]	300 V			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS	16x22 AWG, 2x18 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K			




CBM 04/13/21

DATE

76628

ECO NO.

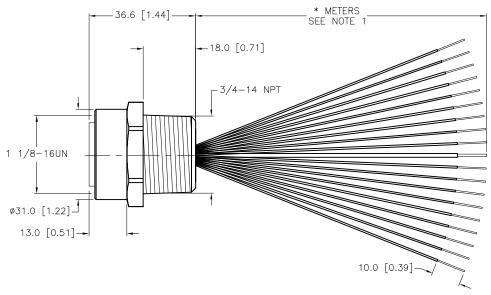

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OT	HERWISE SPECIFIED				

NOTES:

REV DESCRIPTION

C UPDATE PROTECTION CLASS

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE			3000 CAMPUS MINNEAPOLIS, MN	
2. 3. 4.	$\oplus \circlearrowleft$	PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RCK	1-800-544- (763) 553-7 (763) 553-0 www.turck.i	300 708 fax
MATERIAL		DRFT RDS	DATE 12/15/15	DESCRIPTION D. DIKEY 100	* /1/ 75 /NID	Т
SEE SPECIFICATIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD K.Y.	SCALE 1=1.3	P-RKFV 190-*/14.75/NF		I
		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
FINISH	CONTACT TURCK	MILLIMETE	ER [INCH]			
SEE SPECIFICATIONS	FOR MORE INFORMATION)
		DO NOT SCALE	THIS DRAWING	FILE: 777036745	SHEET	1 OF 1