


SPECIFICATIONS		
DEUTSCH CONNECTOR	DT06-3S-P032	
DEUTSCH WEDGELOCK	W3S-1939	
DEUTSCH TERMINALS	0462-201-16141	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
OUTER JACKET MATERIAL/COLOR	EX60/BLACK	
CONDUCTOR INSULATION MATERIAL	XLPE	
NUMBER OF CONDUCTORS [AWG]	2×20 AWG	
PROTECTION CLASS	IP67	
RATED CURRENT	8.0 A	
OPERATING VOLTAGE [V]	250 V	
DRAIN/SHIELD	20 AWG/ALUM-POLYESTER FOIL	
CABLE CONSTRUCTIONS	1 TWISTED PAIR WITH DRAIN MEETING J1939	
	ELECTRICAL REQUIREMENTS	

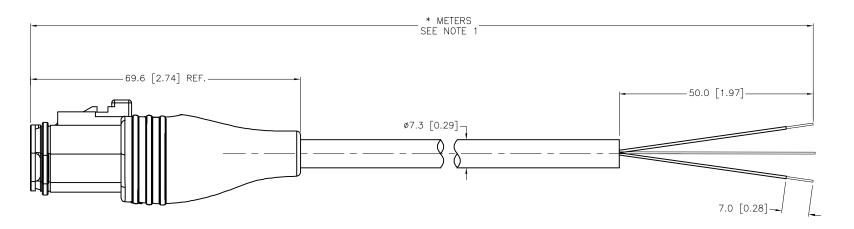

CABLE LENGTH	TOLERANCE *	
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	
STRIP LENGTH	TOLERANCE *	
0-7mm	±0.5mm	
8-29mm	±1.0mm	
30-49mm	±2.0mm	
50-69mm	±3.0mm	
70-100mm	±4.0mm	
OVER 100mm	±5.0mm	
* UNLESS OTHERWISE SPECIFIED		

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

	MATE
	S
	FINIS
77568	S

## RELATED DOCUMENTS 3RD ANGLE PROJECTION 2. 3. MATERIAL ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR SEE SPECIFICATIONS

DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED. REFERENCE ONLY

DATE 08/18/15 DESCRIPTION

SCALE 1=1.0

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

SHEET 1 OF 1

DT06-3S-2323XL-\*M

UNIT OF MEASUREMENT

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS

TV

C.K.

MILLIMETER [ INCH ]

IDENTIFICATION NO. REV

SOURCE DRAWING - FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION ADD OPERATING VOLTAGE 04/25/22 SEE SPECIFICATIONS DESCRIPTION DATE FILE: 777036775 ECO NO. DO NOT SCALE THIS DRAWING