






FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
					
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = DRAIN			
					
				CONTACT CARRIER MATERIAL NYLON or TPU	
				MOLDED HEAD MATERIAL/COLOR TPU/BLACK	
				CONTACT MATERIAL/PLATING BRASS/GOLD	
				COUPLING NUT MATERIAL/PLATING BRASS/NICKEL	
				RATED CURRENT [A] 4.0 A	
				RATED VOLTAGE [V] 250 V	
				OUTER CABLE JACKET MATERIAL/COLOR EXTREMELIFE/BLACK	
				CONDUCTOR INSULATION MATERIAL XLPE	
				NUMBER OF CONDUCTORS [AWG] 4x22 AWG	
				DRAIN/SHIELD 22 AWG DRAIN/FOIL SHIELDS	
				TEMPERATURE RANGE -60°C to +105°C (-76°F to +221°F)	
				PROTECTION CLASS NEMA 1,3,4,6P AND IEC IP68, IP69K	
				CABLE RATING UL: ITC-ER/PLTC-ER, 105°C -60°C COLD BLEND CSA: CIC, 90°C, 300V	



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

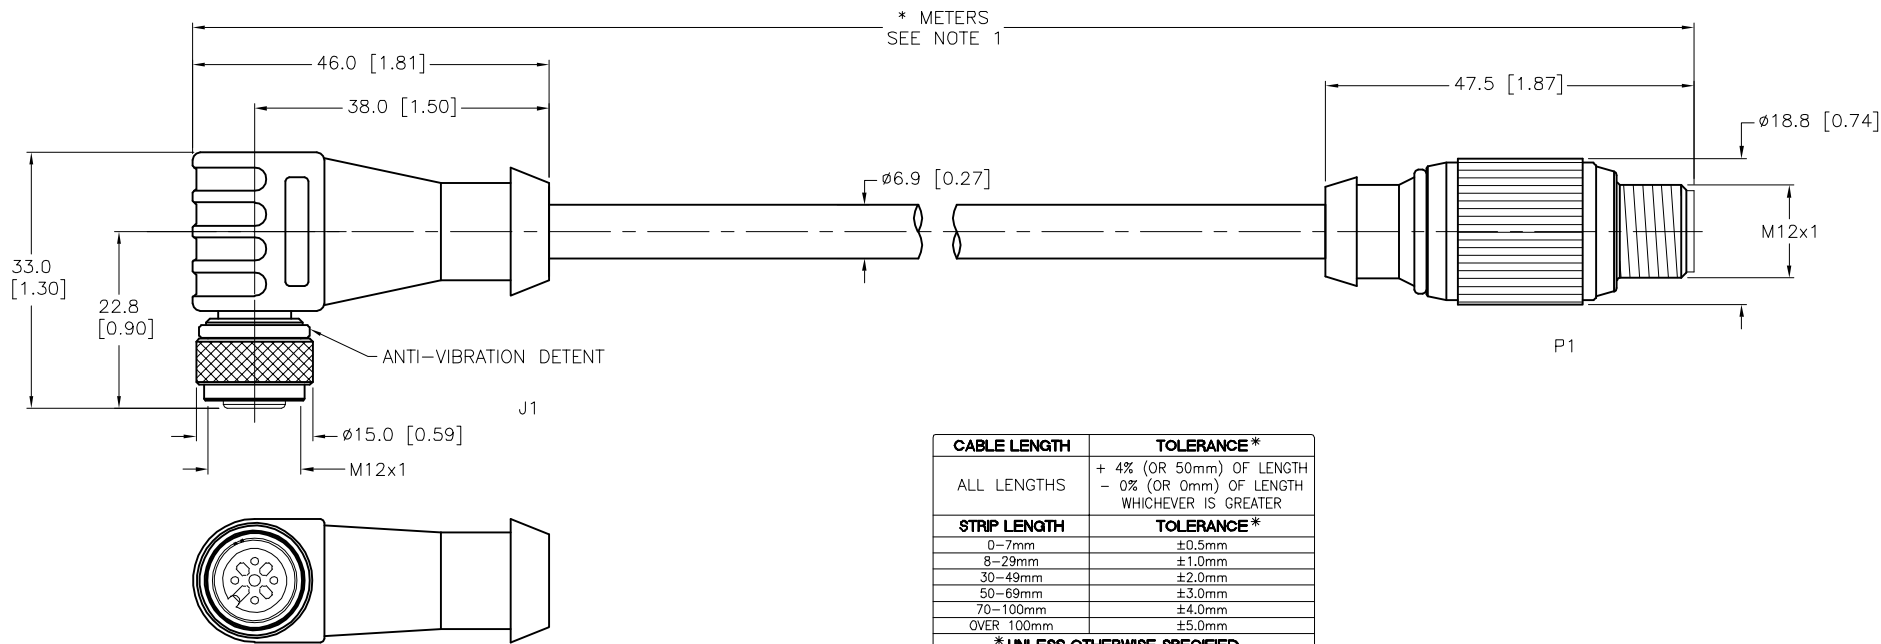- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2020 NEC NOW REQUIRES A DEDICATED GROUND CONDUCTOR FOR ITC-ER AND PLTC-ER CABLES WHEN INSTALLED IN HAZARDOUS LOCATIONS ALTHOUGH UL CABLE STANDARDS DO NOT REQUIRE A GROUND CONDUCTOR. THIS PRODUCT DOES NOT HAVE A DEDICATED GROUND CONDUCTOR. THEREFORE, WHEN INSTALLED IN A HAZARDOUS LOCATION THE INSTALLATION PRACTICES FOR ITC OR PLTC CABLES MUST BE FOLLOWED TO PROVIDE GROUND CONTINUITY.

C	ADD NOTE 2	NF	11/13/20	500000001912	RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DRFT TV	DATE 01/18/16	DESCRIPTION	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
REV	DESCRIPTION	BY	DATE	ECO. NO.	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT	APVD T.S.	SCALE 1=1.0	P-WKE 4.46T-1095XL-* -RSG 5.3T	
					SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]			IDENTIFICATION NO.	REV
							DO NOT SCALE THIS DRAWING			FILE: 777036876	SHEET 1 OF 1