
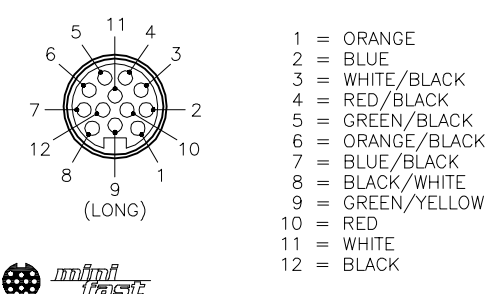
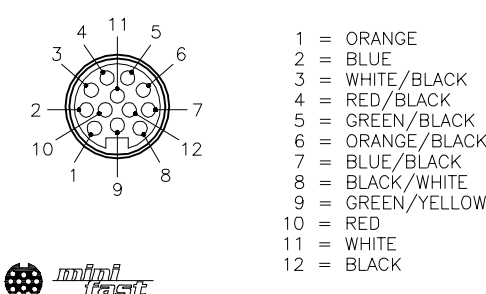


MALE END VIEW		FEMALE END VIEW		SPECIFICATIONS	
 1 = ORANGE 2 = BLUE 3 = WHITE/BLACK 4 = RED/BLACK 5 = GREEN/BLACK 6 = ORANGE/BLACK 7 = BLUE/BLACK 8 = BLACK/WHITE 9 = GREEN/YELLOW 10 = RED 11 = WHITE 12 = BLACK		 1 = ORANGE 2 = BLUE 3 = WHITE/BLACK 4 = RED/BLACK 5 = GREEN/BLACK 6 = ORANGE/BLACK 7 = BLUE/BLACK 8 = BLACK/WHITE 9 = GREEN/YELLOW 10 = RED 11 = WHITE 12 = BLACK		CONTACT CARRIER MATERIAL	TPU
				MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	7.0 A
				RATED VOLTAGE [V]	600 V
				OUTER JACKET MATERIAL/COLOR	TPE/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS	12x16 AWG
				TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K

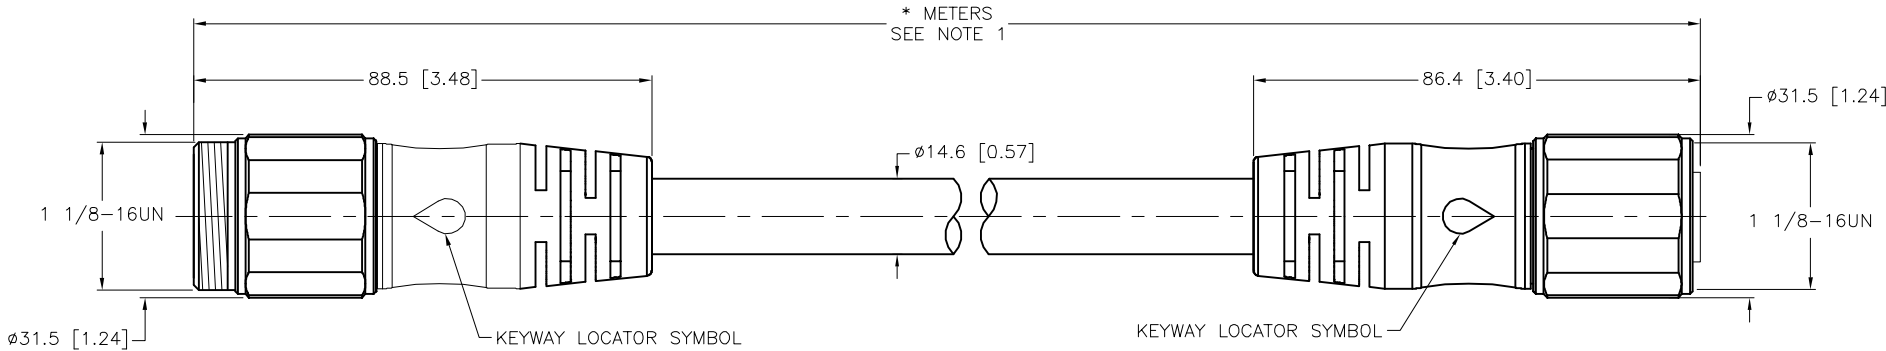

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT NF APVD L.H.		DATE 02/22/16 SCALE 1=1.5	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION P-RSV RKV 126-1714-*M	
FINISH				CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.		REV D	
SEE SPECIFICATIONS				SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		FILE: 777037094	
D UPDATE PROTECTION CLASS				CBM 04/13/21		76628		SHEET 1 OF 1	
REV DESCRIPTION				BY DATE		ECO NO.			