


FRONT END VIEW (DB25 CONNECTOR)

13 1 14 25

1=WHITE	10=RED/BLUE	18=PINK/BROWN
2=GREEN	11=WHITE/GREEN	19=WHITE/BLUE
3=YELLOW	12=BROWN/GREEN	20=BROWN/BLUE
4=GRAY	13=WHITE/YELLOW	21=WHITE/RED
5=PINK	14=YELLOW/BROWN	22=BROWN/RED
6=BLUE	15=WHITE/GRAY	23=WHITE/BLACK
7=RED	16=GRAY/BROWN	24=BROWN
8=VIOLET	17=WHITE/PINK	25=BLACK
9=GRAY/PINK		

- | | | |
|-------------|-----------------|----------------|
| 1=WHITE | 10=RED/BLUE | 18=PINK/BROWN |
| 2=GREEN | 11=WHITE/GREEN | 19=WHITE/BLUE |
| 3=YELLOW | 12=BROWN/GREEN | 20=BROWN/BLUE |
| 4=GRAY | 13=WHITE/YELLOW | 21=WHITE/RED |
| 5=PINK | 14=YELLOW/BROWN | 22=BROWN/RED |
| 6=BLUE | 15=WHITE/GRAY | 23=WHITE/BLACK |
| 7=RED | 16=GRAY/BROWN | 24=BROWN |
| 8=VIOLET | 17=WHITE/PINK | 25=BLACK |
| 9=GRAY/PINK | | |

RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 V
OUTER JACKET MATERIAL/COLOR	TPE/GRAY
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS [AWG]	25x24 AWG
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

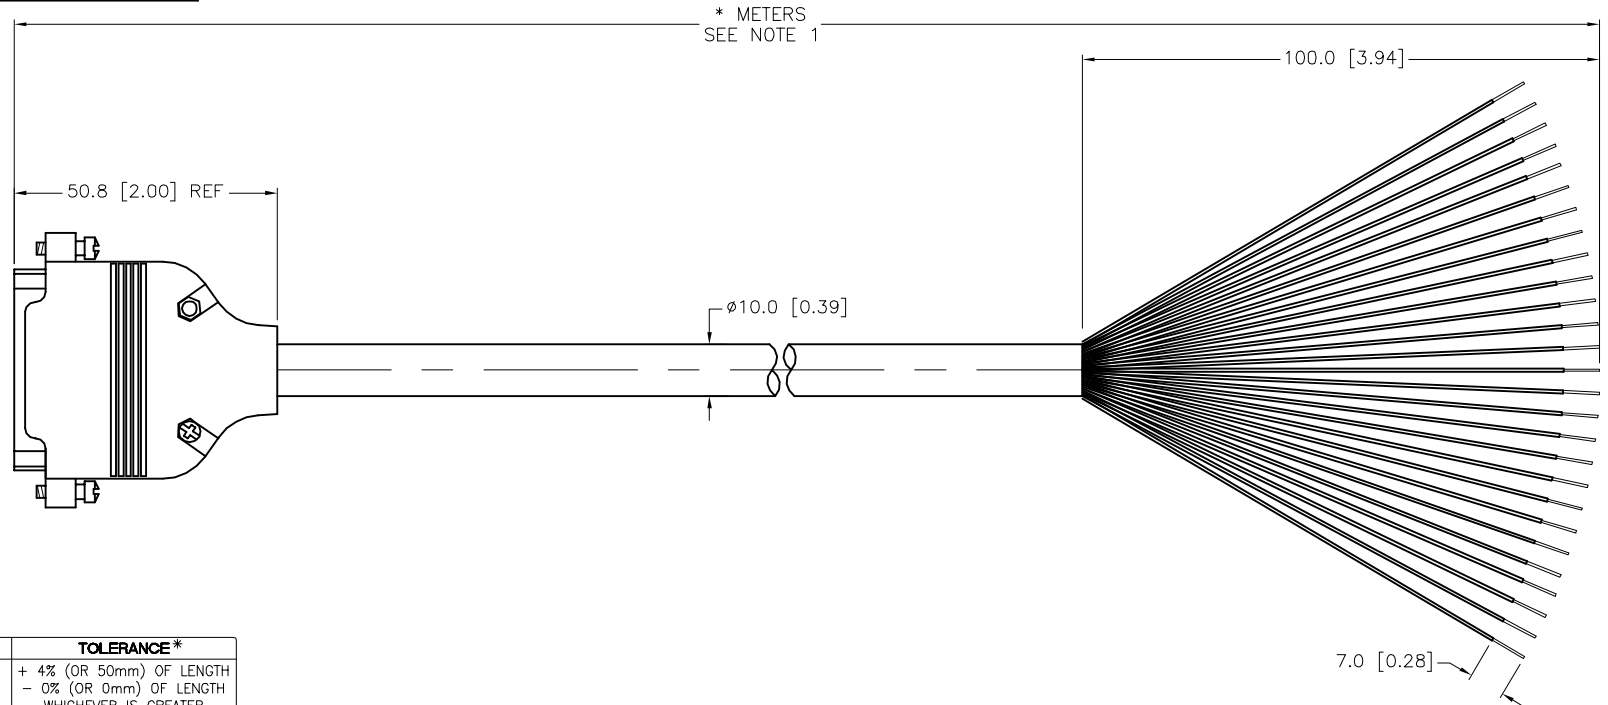


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING – FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	12/21/15	DESCRIPTION DB25F-2283-*			
		APVD	M.A.	SCALE	1=1.5				
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV A	
SEE SPECIFICATIONS		MILLIMETER [INCH]							
		DO NOT SCALE THIS DRAWING				FILE: 777037101		SHEET 1 OF 1	