


MALE END VIEW




1 = BROWN
2 = WHITE
3 = BLUE
3 = BLACK
5 = GRAY



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	TPE/GRAY
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS [AWG]	5x22 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

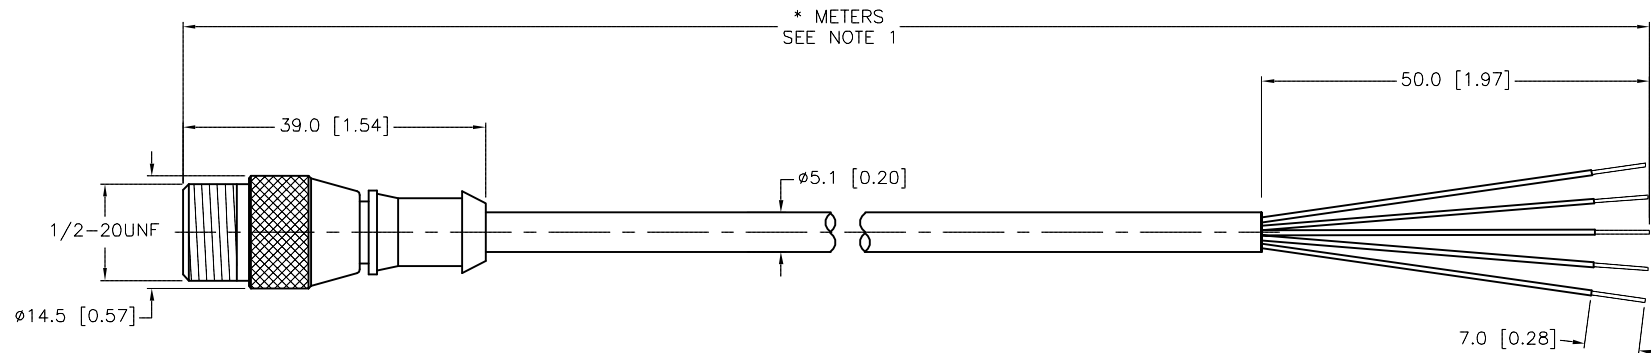

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

2. "/S1507" DESIGNATES CORDSET BUILT WITH EUROFAST "/S101" CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
1. 2. 3. 4.										
MATERIAL		DRFT	TV	DATE	02/09/16			DESCRIPTION	SB 5T-*/S1507	
SEE SPECIFICATIONS		APVD	T.K.	SCALE	1=1.0					
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV		
SEE SPECIFICATIONS		MILLIMETER [INCH]						B		
		DO NOT SCALE THIS DRAWING				FILE: 777037139		SHEET 1 OF 1		

B	UPDATE NOTES	NF	11/20/18	67705
REV	DESCRIPTION	BY	DATE	ECO NO.