


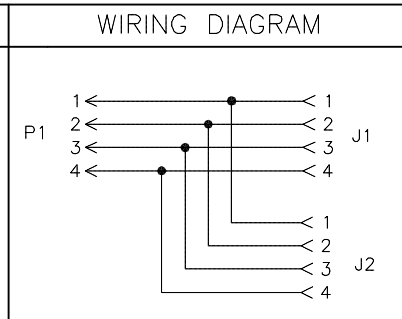


MALE END VIEW		FEMALE END VIEW		WIRING DIAGRAM		SPECIFICATIONS																							
						<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTOR [AWG]</td><td>4x18 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	TPU/YELLOW	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTOR [AWG]	4x18 AWG	TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONTACT CARRIER MATERIAL	NYLON OR TPU																												
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																												
CONTACT MATERIAL/PLATING	BRASS/GOLD																												
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																												
RATED CURRENT [A]	4.0 A																												
RATED VOLTAGE [V]	250 V																												
OUTER JACKET MATERIAL/COLOR	TPU/YELLOW																												
CONDUCTOR INSULATION MATERIAL	PVC																												
NUMBER OF CONDUCTOR [AWG]	4x18 AWG																												
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)																												
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																												

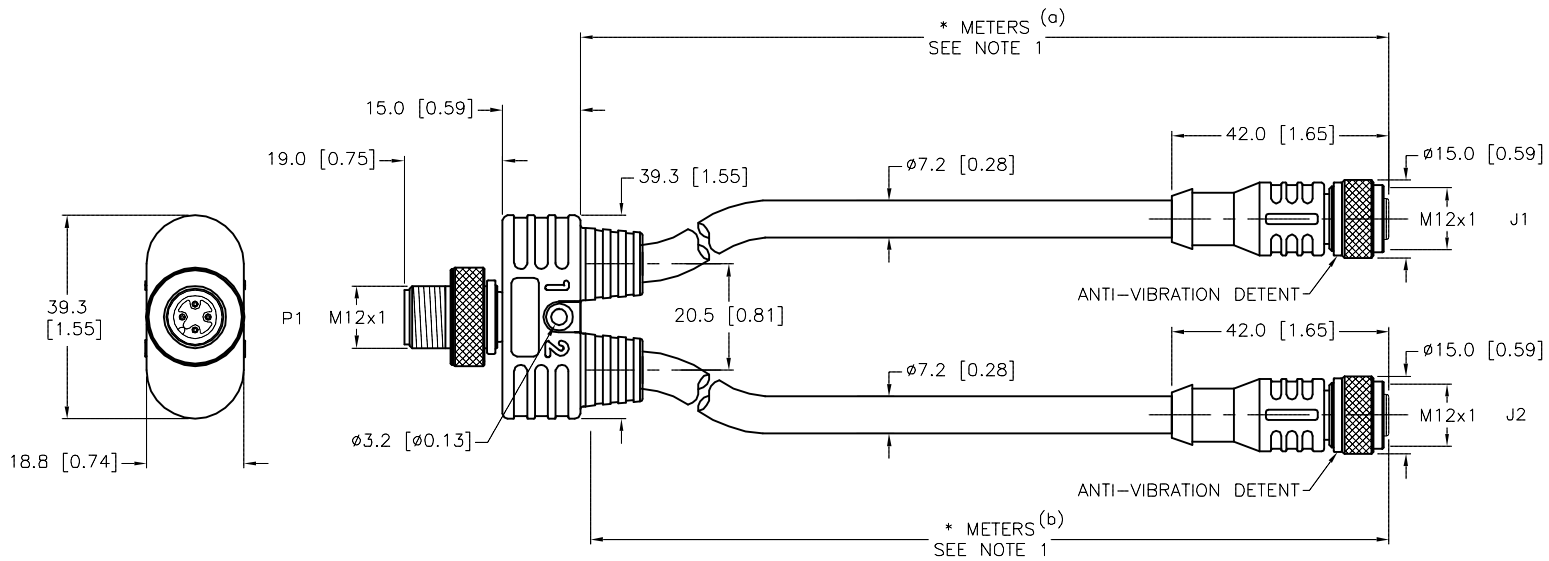


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" DESIGNATES POLYURETHANE (TPU) CABLE.
- "/S651" DESIGNATES PARALLEL WIRING.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT TV		DATE 04/06/16	
MATERIAL		SEE SPECIFICATIONS		APVD K.Y.		SCALE 1=1.5	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION YBZ2-FSM 4.4-2RKC 4.4T-*/*/S90/S651 (a) (b)	
CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV A	
DRAWING RELEASE		TV 04/21/16		FILE: 777037347		SHEET 1 OF 1	
DESCRIPTION		BY DATE ECO NO.					