



MALE END VIEW

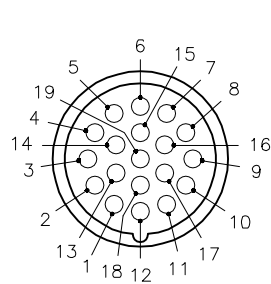


- 1 = VIOLET
 2 = RED
 3 = GRAY
 4 = RED/BLUE
 5 = GREEN
 6 = BLUE
 7 = GRAY/PINK
 8 = WHITE/GREEN
 9 = WHITE/YELLOW
 10 = WHITE/GRAY
 11 = BLACK
 12 = GREEN/YELLOW
 13 = YELLOW/BROWN
 14 = BROWN/GREEN
 15 = WHITE
 16 = YELLOW
 17 = PINK
 18 = GRAY/BROWN
 19 = BROWN




M23 connector

PANEL CUTOUT (TYPICAL)

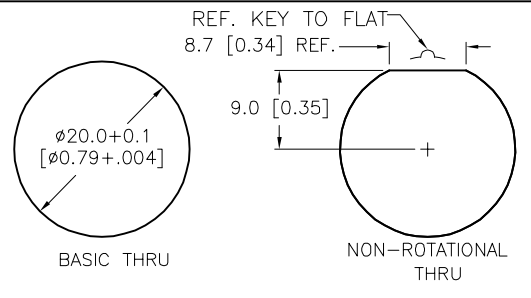

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING/LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
O-RING/GASKET MATERIAL	RUBBER (NBR or FPM)
RATED CURRENT [A]	9.0 A (PINS 6,12,19), 2.0 A (ALL OTHERS)
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBER OF CONDUCTORS [AWG]	19x18 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP67
CABLE RATINGS	UL: ITC/PLTC, 105C CSA: CIC, 90C, 300V
MAX. PANEL THICKNESS	3.5 [0.138]

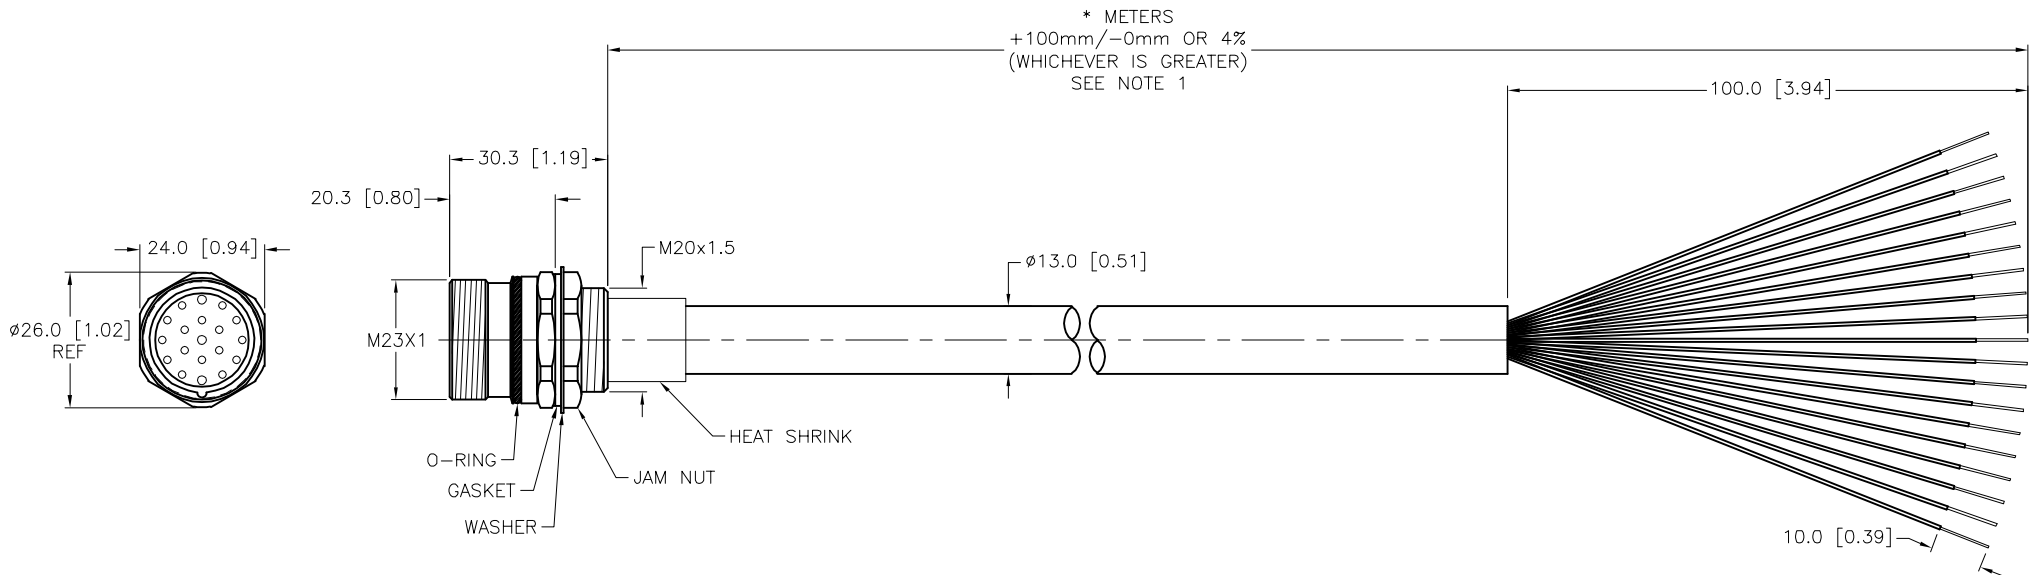


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	04/18/16	DESCRIPTION P-CSFLV 19-1610-*	
SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=1.5		
FINISH		UNIT OF MEASUREMENT					
SEE SPECIFICATIONS		MILLIMETER [INCH]					
	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING				IDENTIFICATION NO.	REV D
		FILE: 777037367				SHEET 1 OF 1	

D	UPDATE CABLE RATINGS	NF	10/28/24	80774
REV	DESCRIPTION	BY	DATE	ECO NO.