


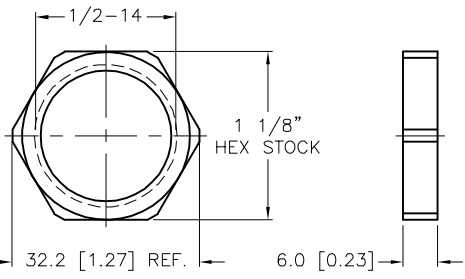
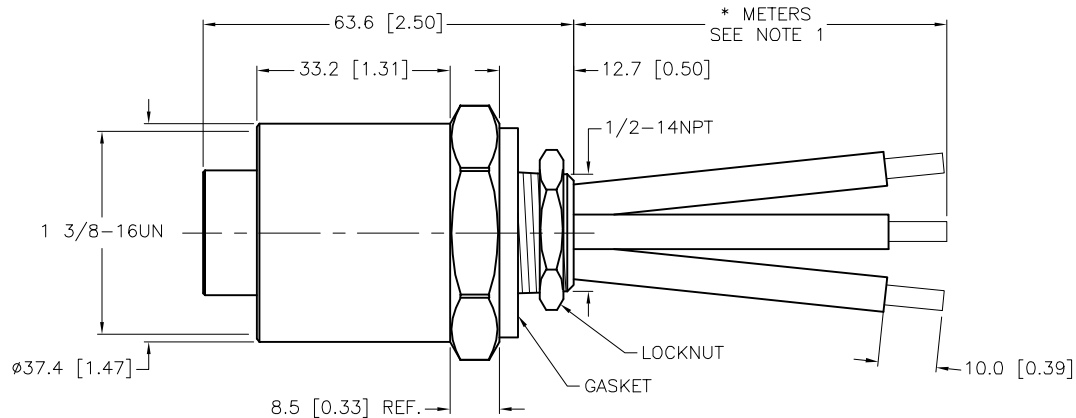


FEMALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS	
 1 = RED 2 = GREEN/YELLOW 3 = WHITE/ORANGE 			CONTACT CARRIER MATERIAL	PVC
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			HOUSING MATERIAL/PLATING	BRASS/NICKEL
			GASKET MATERIAL	NITRILE
			RATED CURRENT [A]	31.0 A
			RATED VOLTAGE [V]	600 VAC
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	3x10 AWG
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
			MAXIMUM PANEL THICKNESS	6.0mm [.236]

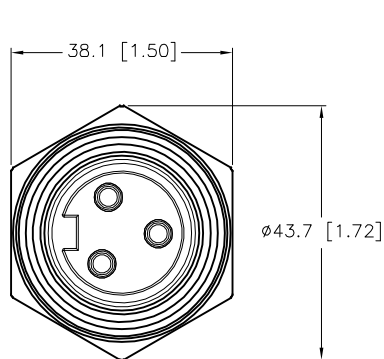



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S3313" DESIGNATES CUSTOM COLOR CODE.

RELATED DOCUMENTS		3RD ANGLE PROJECTION				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.											
2.				DRFT		TV		DATE		04/19/16	
3.				APVD		E.S.		SCALE		1=1.3	
4.				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		MILLIMETER [INCH]		IDENTIFICATION NO.	
MATERIAL		SEE SPECIFICATIONS									
FINISH		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		FILE: 777037372		SHEET 1 OF 1			

B	UPDATED AMP PER ECO	TV	06/16/17	60352
REV	DESCRIPTION	BY	DATE	ECO NO.