


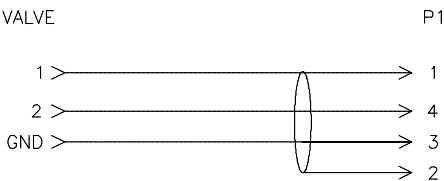
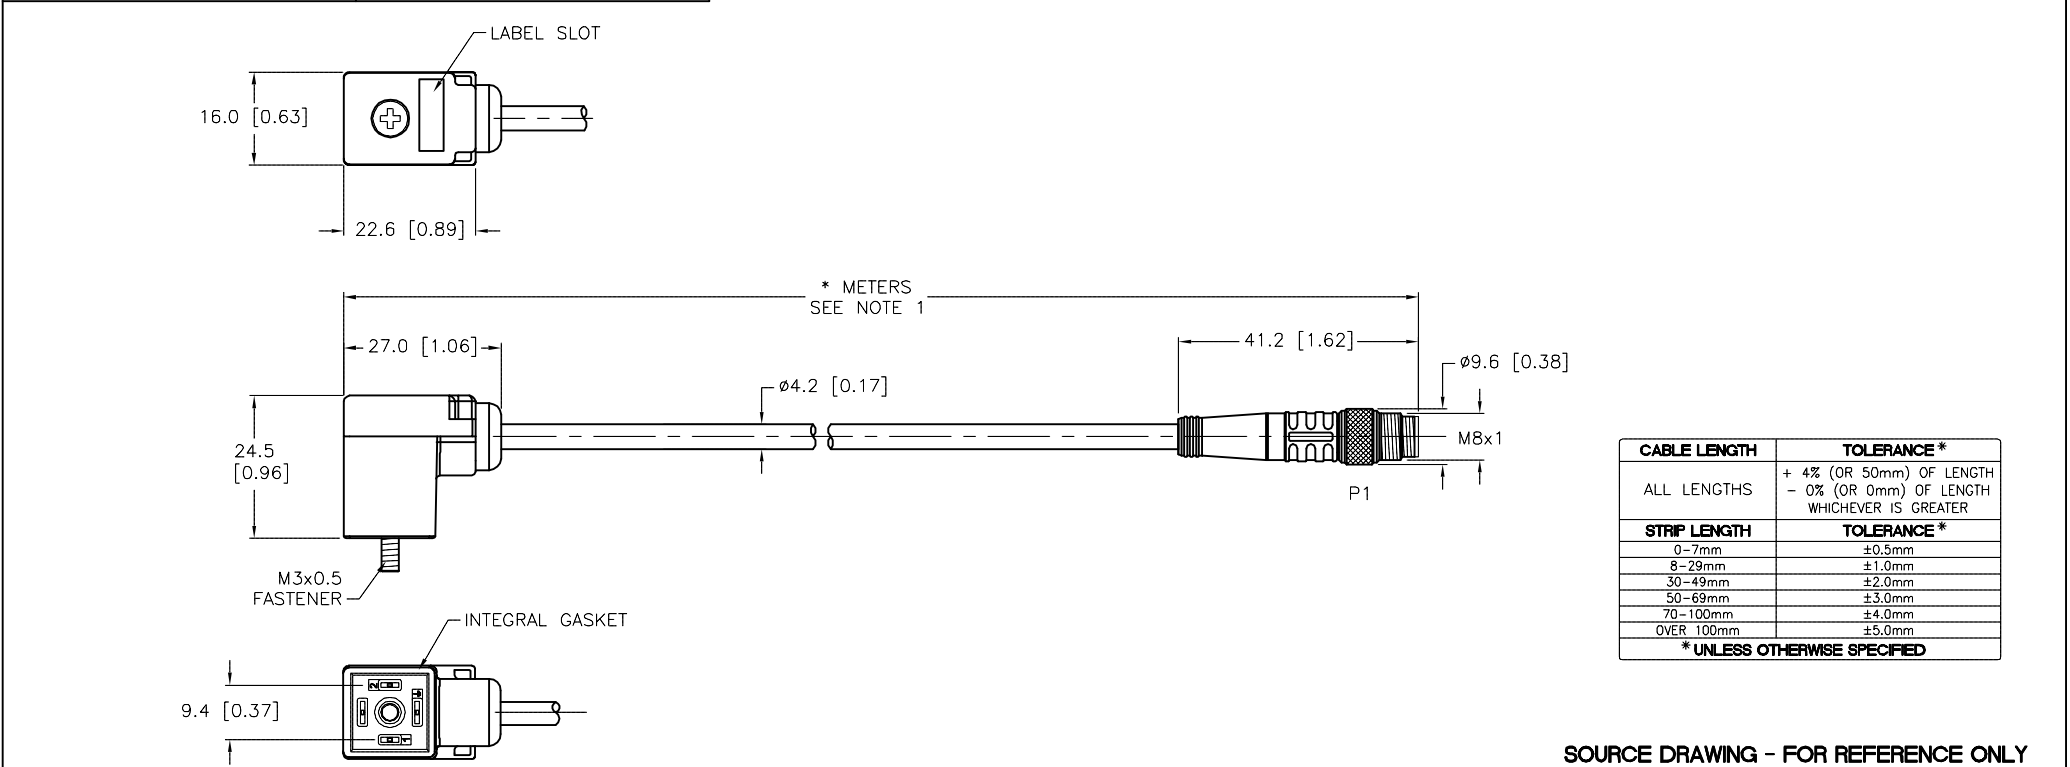


VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																										
 1 = BROWN 2 = BLACK GND = BLUE	 1 = BROWN 2 = DRAIN 3 = BLUE 4 = BLACK 	VALVE P1 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/TRANSLUCENT BLACK (J1), YELLOW (P1)</td></tr><tr><td>CONTACT MATERIAL/PLATING (J1)</td><td>BRASS/SILVER</td></tr><tr><td>CONTACT MATERIAL/PLATING (P1)</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING (P1)</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>125 VAC/DC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMER OF CONDUCTORS [AWG]</td><td>3x24 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>26 AWG DRAIN/ALUMINUM FOIL</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-40°C to +90C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (J1), YELLOW (P1)	CONTACT MATERIAL/PLATING (J1)	BRASS/SILVER	CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	125 VAC/DC	OUTER JACKET MATERIAL/COLOR	TPU/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMER OF CONDUCTORS [AWG]	3x24 AWG	DRAIN/SHIELD	26 AWG DRAIN/ALUMINUM FOIL	OPERATING TEMPERATURE	-40°C to +90C (-40°F to +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONTACT CARRIER MATERIAL	NYLON OR TPU																												
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (J1), YELLOW (P1)																												
CONTACT MATERIAL/PLATING (J1)	BRASS/SILVER																												
CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD																												
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL																												
RATED CURRENT [A]	4.0 A																												
RATED VOLTAGE [V]	125 VAC/DC																												
OUTER JACKET MATERIAL/COLOR	TPU/BLACK																												
CONDUCTOR INSULATION MATERIAL	PVC																												
NUMER OF CONDUCTORS [AWG]	3x24 AWG																												
DRAIN/SHIELD	26 AWG DRAIN/ALUMINUM FOIL																												
OPERATING TEMPERATURE	-40°C to +90C (-40°F to +194°F)																												
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																												



- NOTES:
- 1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 2. "/S1384" DESIGNATES CUSTOM WIRING. DRAIN CONNECTED ON M8 PIN 2.

A	DRAWING RELEASE	TV	05/09/16	
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	TV	DATE	02/29/16	DESCRIPTION TC9S 2-A601-*M-PSG 4M/S1384	
SEE SPECIFICATIONS		APVD	K.Y.	SCALE	1 = 1.3		
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.	REV A
SEE SPECIFICATIONS			MILLIMETER [INCH]				
		DO NOT SCALE THIS DRAWING			FILE: 777037458	SHEET 1 OF 1	