MALE END VIEW


1 3 2 4 (LONG)


1 = BROWN 2 = WHITE 3 = BLUE

4 = BLACK

**	mini fast,

SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
HOUSING MATERIAL/COLOR	BRASS/NICKEL				
RATED CURRENT [A]	10.0 A				
RATED VOLTAGE [V]	600 V				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBERS OF CONDUCTORS [AWG]	4x16 AWG				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				



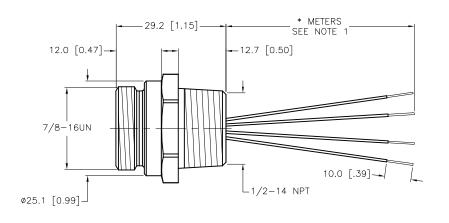

CABLE LENGTH	CABLE LENGTH TOLERANCE*				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNILESS OTHERWISE SPECIFIED					

NOTES:

- 1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/CS15376" DESIGNATES CUSTOM WIRING.

Α	DRAWING RELEASE	ΤV	05/19/16	
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		MINNEAP(1-80((763) (763) ww	AMPUS I DLIS, MN 0-544-7 553-73 553-07 w.turck.u	55441 7769 300 708 fax
MATERIAL		DRFT NF	DATE 03/30/16	DESCRIPTION TO A CALL THAT (NIDT (OC	4 - 7 7 (
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD R.P.	SCALE 1=1.0	RSF 461-*M/NPT/CS	153/6)
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.		REV
FINISH	1		T L NOUL 1	IDENTIFICATION NO.		KEV
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [INCH]			А
SEE SI ESILIOMISMS		DO NOT SCALE	THIS DRAWING	FILE: 777037524	SHEET	1 OF 1