




(J1) DEUTSCH END VIEW: FEMALE (P1) DEUTSCH END VIEW: MALE

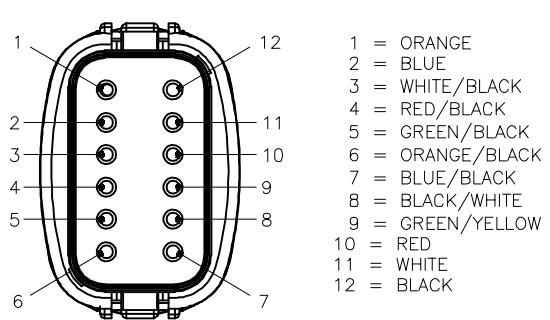

SPECIFICATIONS

DEUTSCH CONNECTOR (J1)	DT06-12SC-CE04
DEUTSCH WEDGELOCK (J1)	W12S
DEUTSCH TERMINALS (J1)	0462-201-16141
DEUTSCH TERMINALS (P1)	0460-202-16141
DEUTSCH CONNECTOR (P1)	DT04-12PC
DEUTSCH WEDGELOCK (P1)	W12P
RATED CURRENT [A]	6.0 A
OPERATING VOLTAGE [V]	250 V
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	12x18 AWG
PROTECTION CLASS	IP67, IP69K

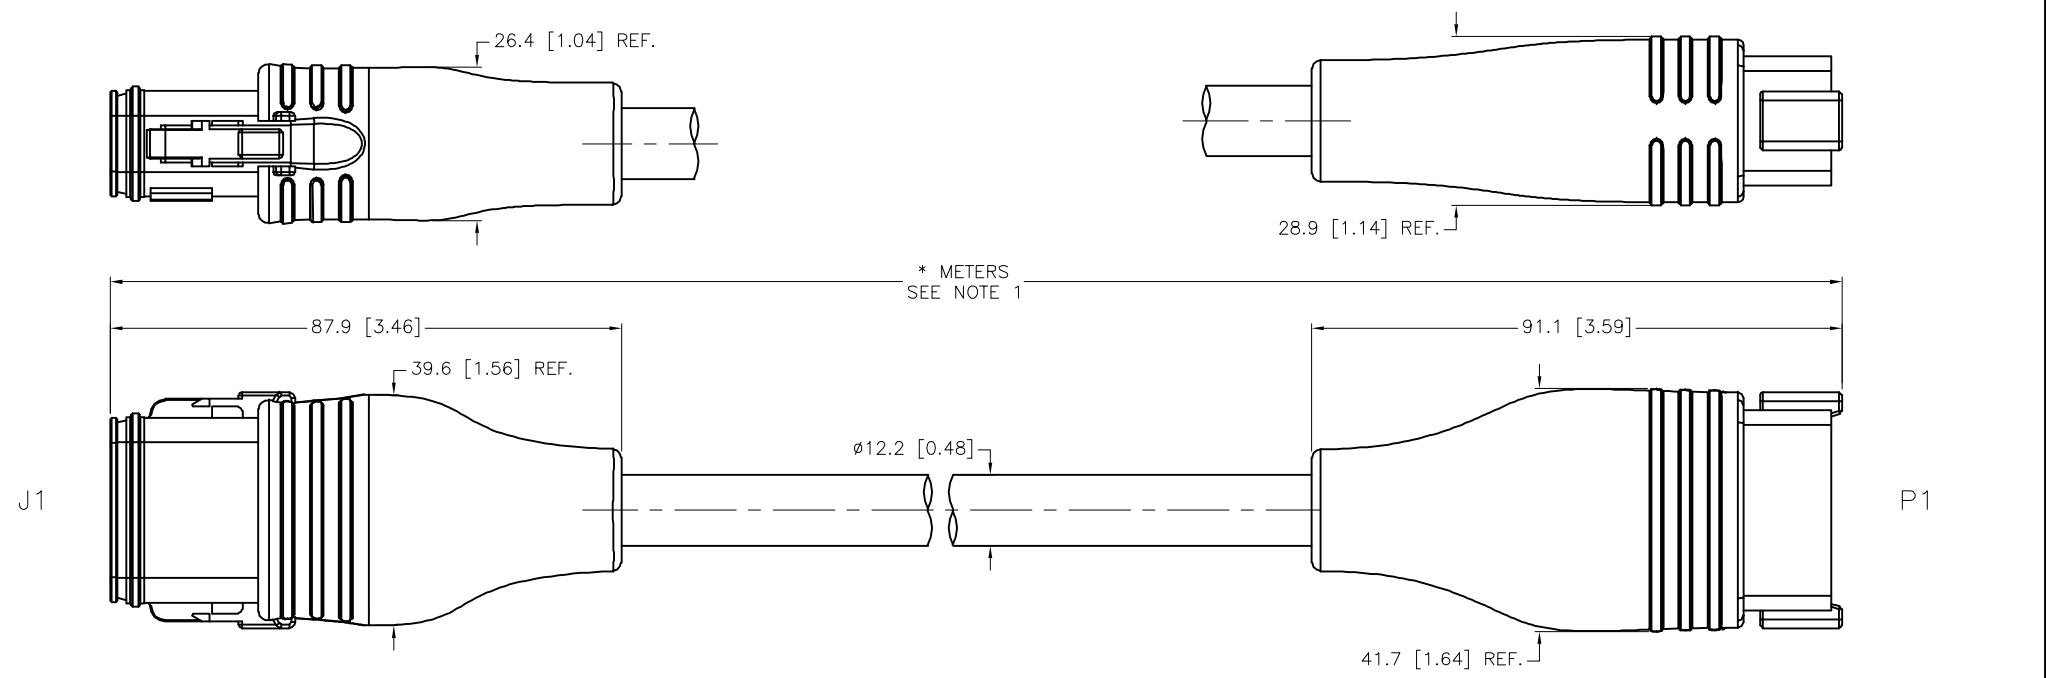

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

DRFT NF

APVD C.K.

DATE 06/06/16

SCALE 1=1.3

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DESCRIPTION

DT06-12SC-2157-*M-DT04-12PC

IDENTIFICATION NO.

FILE: 777037635

REV

E

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

E ADD OPERATING VOLTAGE

NF 04/25/22 77568

REV DESCRIPTION

BY DATE ECO NO.