


FEMALE END VIEW



A = WHITE
B = RED
C = GREEN/YELLOW
D = ORANGE
E = BLACK
F = BLUE

CONNECTOR


TYPE/STYLE - MS 3106M

SHELL SIZE - 14S

INSERT ARRANGEMENT - 6S

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	10.0 A
RATED VOLTAGE [V]	200 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC/NYLON
NUMBER OF CONDUCTORS	6x18 AWG
ARMOR SHEATH/MATERIAL	INTERLOCKING/ALUMINUM
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
CONNECTOR TYPE	MIL-DTL-5015

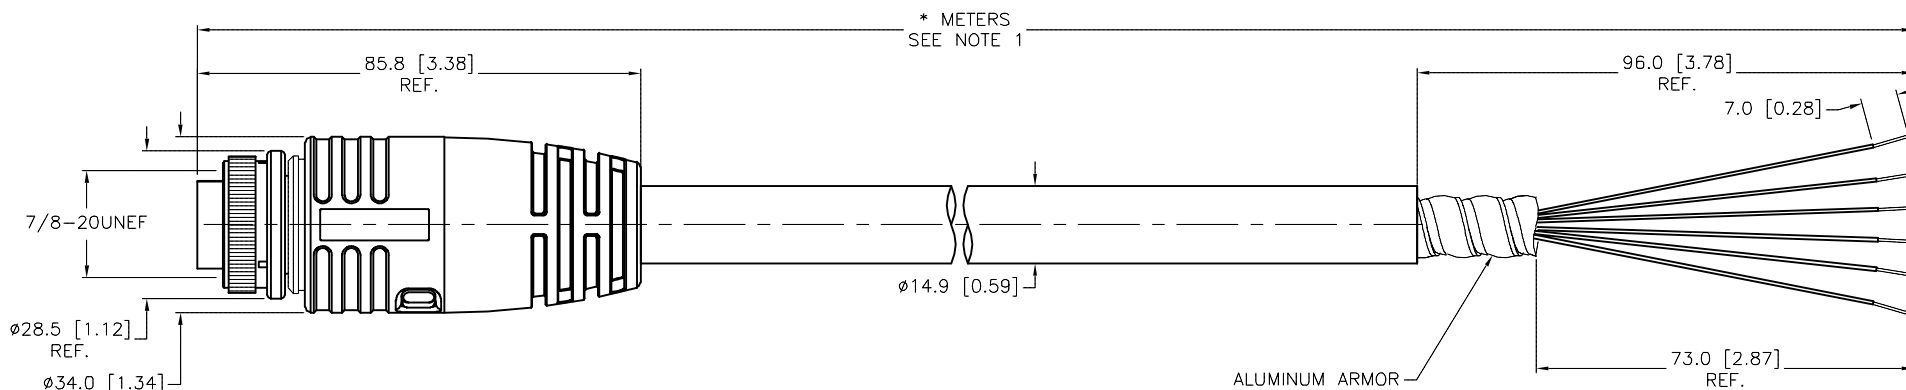

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.
- "/S1366" DESIGNATES OVERMOLDED MIL-SPEC CONNECTOR MOLDED IN LARGER BODY SIZE TO ACCOMMODATE LARGE CABLE DIAMETER.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.							
MATERIAL		DRFT	RDS	DATE	06/19/15	DESCRIPTION	
SEE SPECIFICATIONS		APVD	M.A.	SCALE	1=1.5	MS 3106M-14S-6S-1043-*/S1366	
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
SEE SPECIFICATIONS		MILLIMETER [INCH]				REV	
		DO NOT SCALE THIS DRAWING				B	
		FILE: 777037647				SHEET 1 OF 1	

B	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	01/03/18	61169
REV	DESCRIPTION	BY	DATE	ECO NO.