




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS																												
 A = GREEN/YELLOW B = BLACK C = WHITE	 1 = GREEN/YELLOW 2 = N/C 3 = BLACK 4 = WHITE 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU or NYLON (P1)</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK (J1), YELLOW (P1)</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD (P1)</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL (P1)</td></tr><tr><td>DEUTSCH CONNECTOR</td><td>DT06-3S-P032 (J1)</td></tr><tr><td>DEUTSCH WEDGELOCK</td><td>W3S (J1)</td></tr><tr><td>DEUTSCH TERMINALS</td><td>0462-201-16141 (J1)</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPE/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC/NYLON</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>OPERATING VOLTAGE [V]</td><td>250 V</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x18 AWG</td></tr><tr><td>PROTECTION CLASS</td><td>IP67</td></tr><tr><td>CABLE APPROVALS</td><td>(UL) TC DIRECT BURIAL 90C DRY/WET 600V SUNLIGHT RESISTANT OIL RES II -40C OR WTTT 90C DRY/WET 1000V OR AWM 105C 600V OR CSA CIC/TC PVC/N 90C DRY 75C WET 600V FT1 FT4 SUNLIGHT RESISTANT -40C</td></tr></table>	CONTACT CARRIER MATERIAL	TPU or NYLON (P1)	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK (J1), YELLOW (P1)	CONTACT MATERIAL/PLATING	BRASS/GOLD (P1)	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)	DEUTSCH CONNECTOR	DT06-3S-P032 (J1)	DEUTSCH WEDGELOCK	W3S (J1)	DEUTSCH TERMINALS	0462-201-16141 (J1)	OUTER JACKET MATERIAL/COLOR	TPE/BLACK	CONDUCTOR INSULATION MATERIAL	PVC/NYLON	RATED CURRENT [A]	4.0 A	OPERATING VOLTAGE [V]	250 V	NUMBER OF CONDUCTORS [AWG]	3x18 AWG	PROTECTION CLASS	IP67	CABLE APPROVALS	(UL) TC DIRECT BURIAL 90C DRY/WET 600V SUNLIGHT RESISTANT OIL RES II -40C OR WTTT 90C DRY/WET 1000V OR AWM 105C 600V OR CSA CIC/TC PVC/N 90C DRY 75C WET 600V FT1 FT4 SUNLIGHT RESISTANT -40C
CONTACT CARRIER MATERIAL	TPU or NYLON (P1)																													
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK (J1), YELLOW (P1)																													
CONTACT MATERIAL/PLATING	BRASS/GOLD (P1)																													
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)																													
DEUTSCH CONNECTOR	DT06-3S-P032 (J1)																													
DEUTSCH WEDGELOCK	W3S (J1)																													
DEUTSCH TERMINALS	0462-201-16141 (J1)																													
OUTER JACKET MATERIAL/COLOR	TPE/BLACK																													
CONDUCTOR INSULATION MATERIAL	PVC/NYLON																													
RATED CURRENT [A]	4.0 A																													
OPERATING VOLTAGE [V]	250 V																													
NUMBER OF CONDUCTORS [AWG]	3x18 AWG																													
PROTECTION CLASS	IP67																													
CABLE APPROVALS	(UL) TC DIRECT BURIAL 90C DRY/WET 600V SUNLIGHT RESISTANT OIL RES II -40C OR WTTT 90C DRY/WET 1000V OR AWM 105C 600V OR CSA CIC/TC PVC/N 90C DRY 75C WET 600V FT1 FT4 SUNLIGHT RESISTANT -40C																													

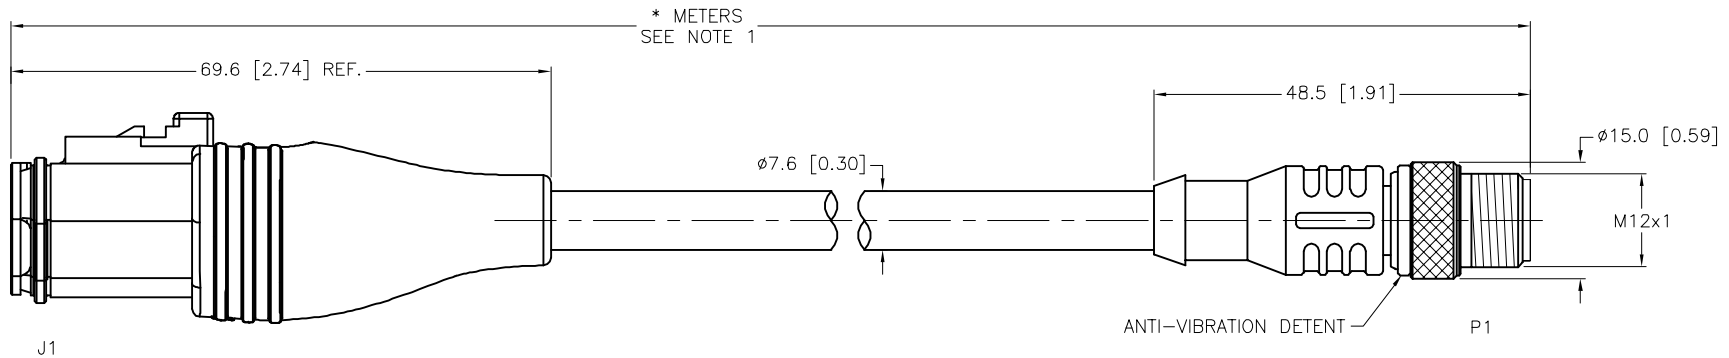


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							
MATERIAL		DRFT TV		DATE 08/01/16		DESCRIPTION DT06-3S-2145-*M-RSC 4T	
SEE SPECIFICATIONS		APVD P.J.		SCALE 1=1.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV C	
SEE SPECIFICATIONS							
		DO NOT SCALE THIS DRAWING		FILE: 777038010		SHEET 1 OF 1	

C	ADD OPERATING VOLTAGE	NF	04/25/22	77568
REV	DESCRIPTION	BY	DATE	ECO NO.