


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU (J1)
CONTACT CARRIER MATERIAL/PLATING	ZINC/NICKEL (P1)
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)
HOUSING MATERIAL/PLATING	BRASS/NICKEL (J1)
RATED CURRENT [A]	0.5 A
RATED VOLTAGE [V]	48 V
OUTER CABLE JACKET MATERIAL/COLOR	TPO/MINT GREEN (LSZH)
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	4STP× 26AWG, STRANDED
SHIELDING	ALUM.-POLYESTER FOIL & T-C BRAIDED
TRANSMISSION CHARACTERISTICS	CAT6A
TEMPERATURE RANGE	-20°C to +70°C (-4°F to +158°F)
PROTECTION CLASS	MEETS IEC IP67, NEMA 6P

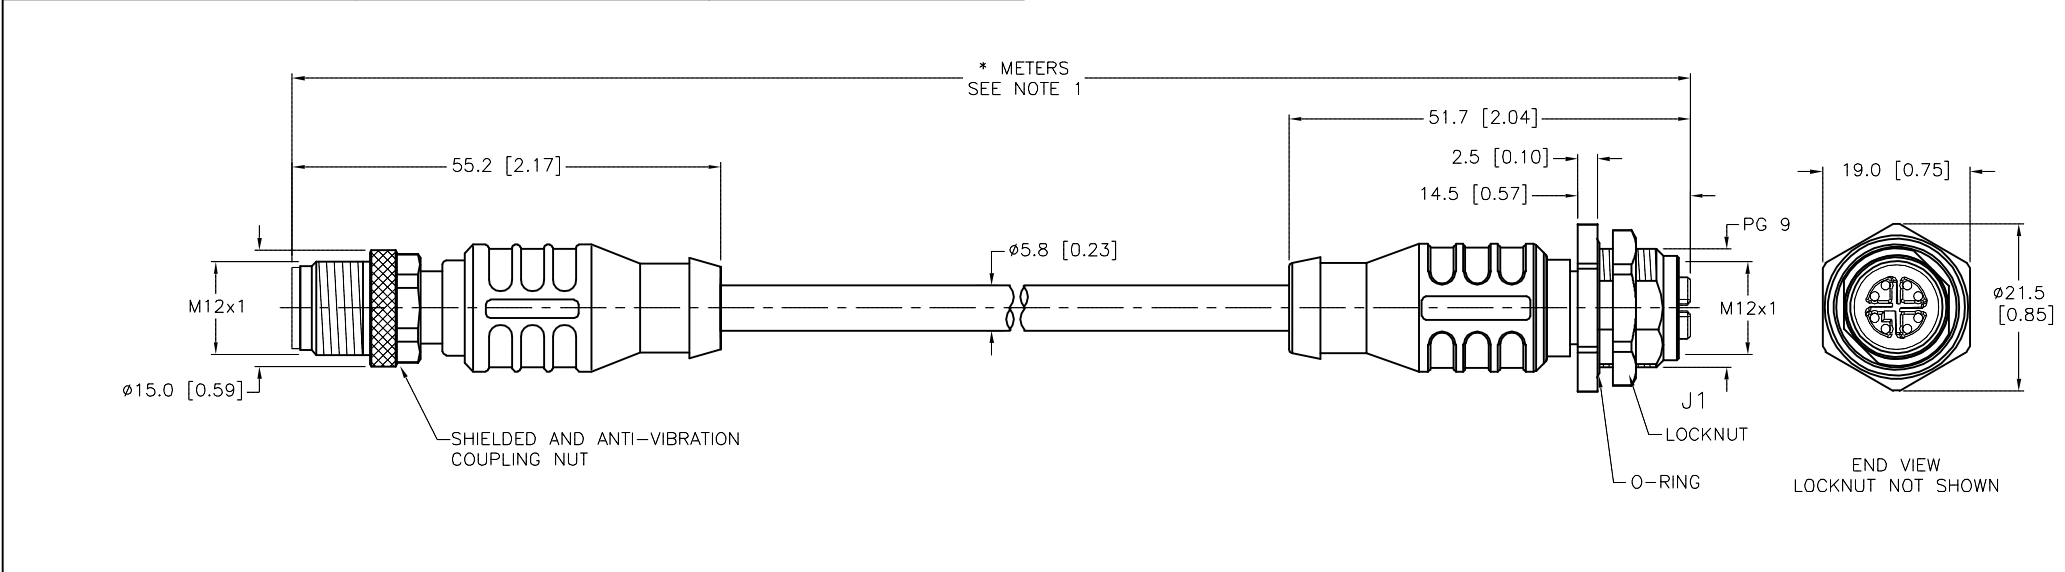

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:
 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
			DRFT TV APVD L.S.	DATE 08/16/16 SCALE 1=1.0
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.
FINISH		CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING	REV A
A DRAWING RELEASE	NF 01/29/19	FILE: 777038040		SHEET 1 OF 1
REV DESCRIPTION	BY DATE ECO NO.			