

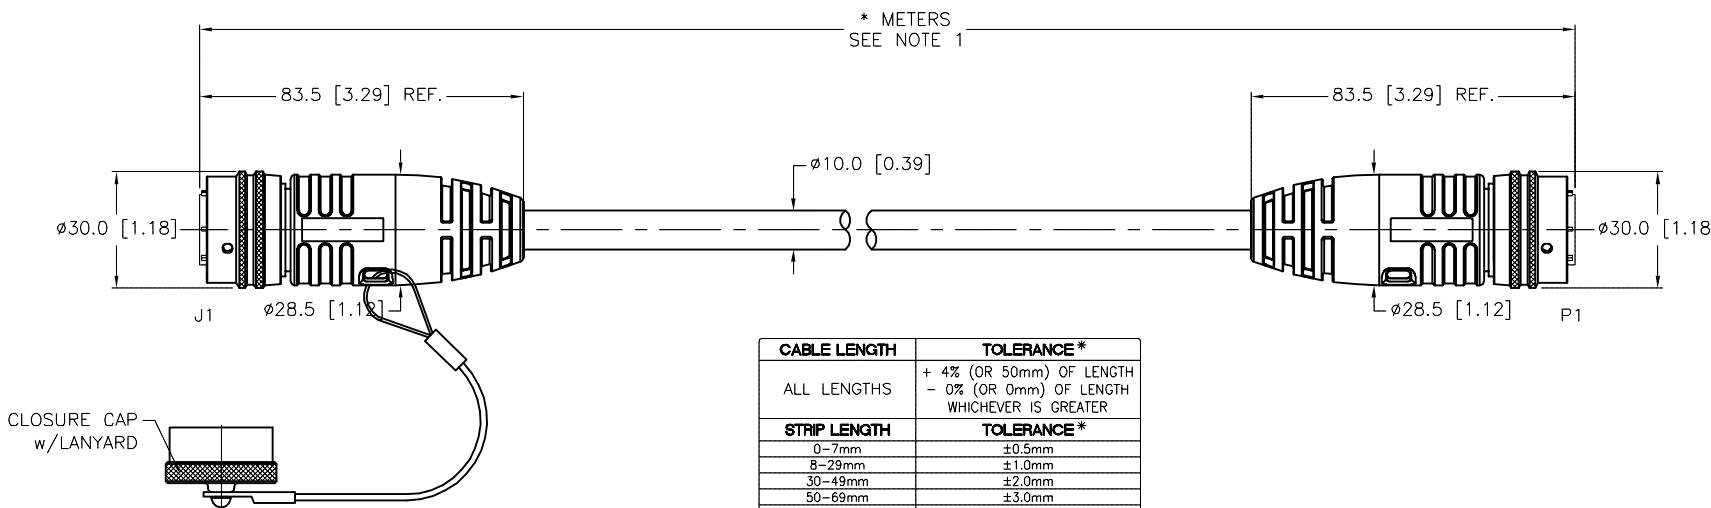



FEMALE END VIEW (J1)		MALE END VIEW (P1)		SPECIFICATIONS																													
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NEOPRENE</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>COPPER ALLOY/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>ALUMINUM ALLOY/OLIVE DRAB CHROMATE</td></tr><tr><td>MOLD SLEEVE</td><td>ALUMINUM/BLACK ANODIZED</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>300 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS</td><td>3x18 AWG, 16x22 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>20 AWG DRAIN/POLYESTER FOIL</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C TO +105°C (-40°F TO +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68</td></tr><tr><td>CONNECTOR TYPE</td><td>MIL-DTL-26482</td></tr></table>		CONTACT CARRIER MATERIAL	NEOPRENE	MOLDED HEAD MATERIAL/COLOR	PVC/BLACK	CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD	COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE	MOLD SLEEVE	ALUMINUM/BLACK ANODIZED	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	300 V	OUTER JACKET MATERIAL/COLOR	PVC/YELLOW	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS	3x18 AWG, 16x22 AWG	DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL	TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68	CONNECTOR TYPE	MIL-DTL-26482
CONTACT CARRIER MATERIAL	NEOPRENE																																
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK																																
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD																																
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE																																
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED																																
RATED CURRENT [A]	2.0 A																																
RATED VOLTAGE [V]	300 V																																
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW																																
CONDUCTOR INSULATION MATERIAL	PVC																																
NUMBER OF CONDUCTORS	3x18 AWG, 16x22 AWG																																
DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL																																
TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)																																
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68																																
CONNECTOR TYPE	MIL-DTL-26482																																
A = VIOLET B = RED C = GRAY D = RED/BLUE E = GREEN F = BLUE G = GRAY/PINK H = WHITE/GREEN J = WHITE/YELLOW K = WHITE/GRAY L = BLACK M = GREEN/YELLOW N = YELLOW/BROWN P = BROWN/GREEN R = WHITE		A = VIOLET B = RED C = GRAY D = RED/BLUE E = GREEN F = BLUE G = GRAY/PINK H = WHITE/GREEN J = WHITE/YELLOW K = WHITE/GRAY L = BLACK M = GREEN/YELLOW N = YELLOW/BROWN P = BROWN/GREEN R = WHITE																															
CONNECTOR TYPE/STYLE - MS 3116M SHELL SIZE - 14 INSERT ARRANGEMENT - 15S		CONNECTOR TYPE/STYLE - MS 3116M SHELL SIZE - 14 INSERT ARRANGEMENT - 15P																															

		<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> * UNLESS OTHERWISE SPECIFIED		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK					
CABLE LENGTH	TOLERANCE*																										
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																										
STRIP LENGTH	TOLERANCE*																										
0-7mm	±0.5mm																										
8-29mm	±1.0mm																										
30-49mm	±2.0mm																										
50-69mm	±3.0mm																										
70-100mm	±4.0mm																										
OVER 100mm	±5.0mm																										
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH. 2. "/S3138" DESIGNATES ATTACHED MATING CLOSURE CAP FOR FEMALE END ONLY. 3. UNUSED CONDUCTORS AND DRAIN TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.		RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		DRFT TV DATE 04/26/16 APVD M.A. SCALE 1=2.0		DESCRIPTION MS 3116M-14-15S-0620-* -14-15P/S3138		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. REV B		DO NOT SCALE THIS DRAWING FILE: 777038054 SHEET 1 OF 1											
<table><tr><td>B</td><td>UPDATE COUPLING NUT DIAMETER</td><td>RDS</td><td>09/19/18</td><td>66883</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>		B	UPDATE COUPLING NUT DIAMETER	RDS	09/19/18	66883	REV	DESCRIPTION	BY	DATE	ECO NO.	MATERIAL SEE SPECIFICATIONS		FINISH SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION											
B	UPDATE COUPLING NUT DIAMETER	RDS	09/19/18	66883																							
REV	DESCRIPTION	BY	DATE	ECO NO.																							