




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	PVC/GRAY
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	5x22 AWG
				DRAIN/SHIELD	24 AWG DRAIN/ALUMINIZED-POLYESTER FOIL SHIELD
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

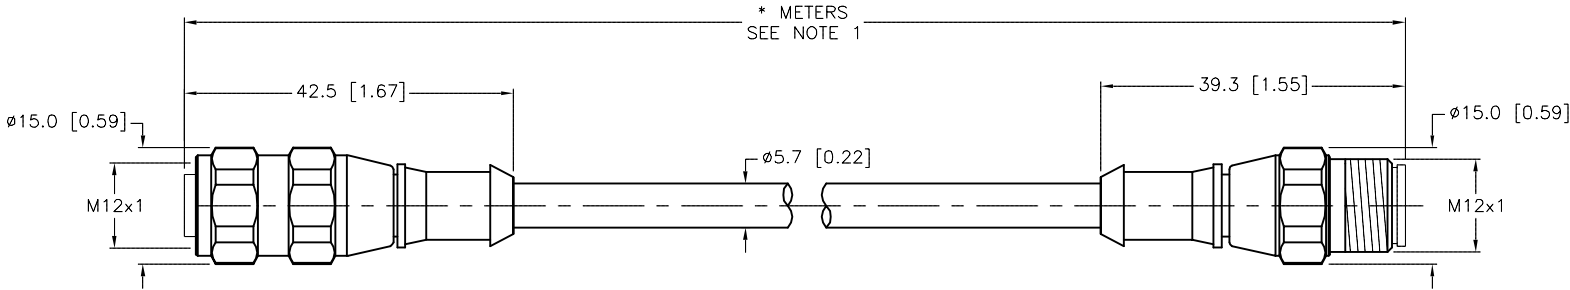


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S618" DESIGNATES CABLE WITH FOIL SHIELD AND DRAIN. DRAIN IS NOT CONNECTED AT THE CONNECTOR.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT NF		DATE 08/26/16	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD P.J.		SCALE 1=1.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION WAKVW 4.5T-*--RSV 4.5T/S618	
A				DRAWING RELEASE		NF		09/09/16	
REV				DESCRIPTION		BY		DATE	
								ECO NO.	
								DO NOT SCALE THIS DRAWING	
								IDENTIFICATION NO.	
								REV A	
								FILE: 777038171	
								SHEET 1 OF 1	