



FEMALE END VIEW

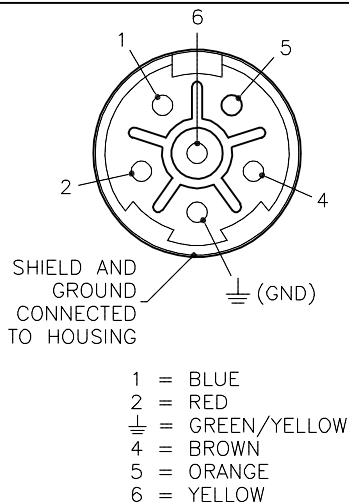

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SPECIFICATIONS


CONTACT CARRIER MATERIAL/COLOR	NYLON/GRAY
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
MANUFACTURER RATED CURRENT [A]	25 A
UL RATED CURRENT [A]	16 A
RATED VOLTAGE [V]	600 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC/NYLON
NUMBER OF CONDUCTORS [AWG]	6x12 AWG
SHIELD	POLYESTER FOIL/TC BRAIDED 65%
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP67

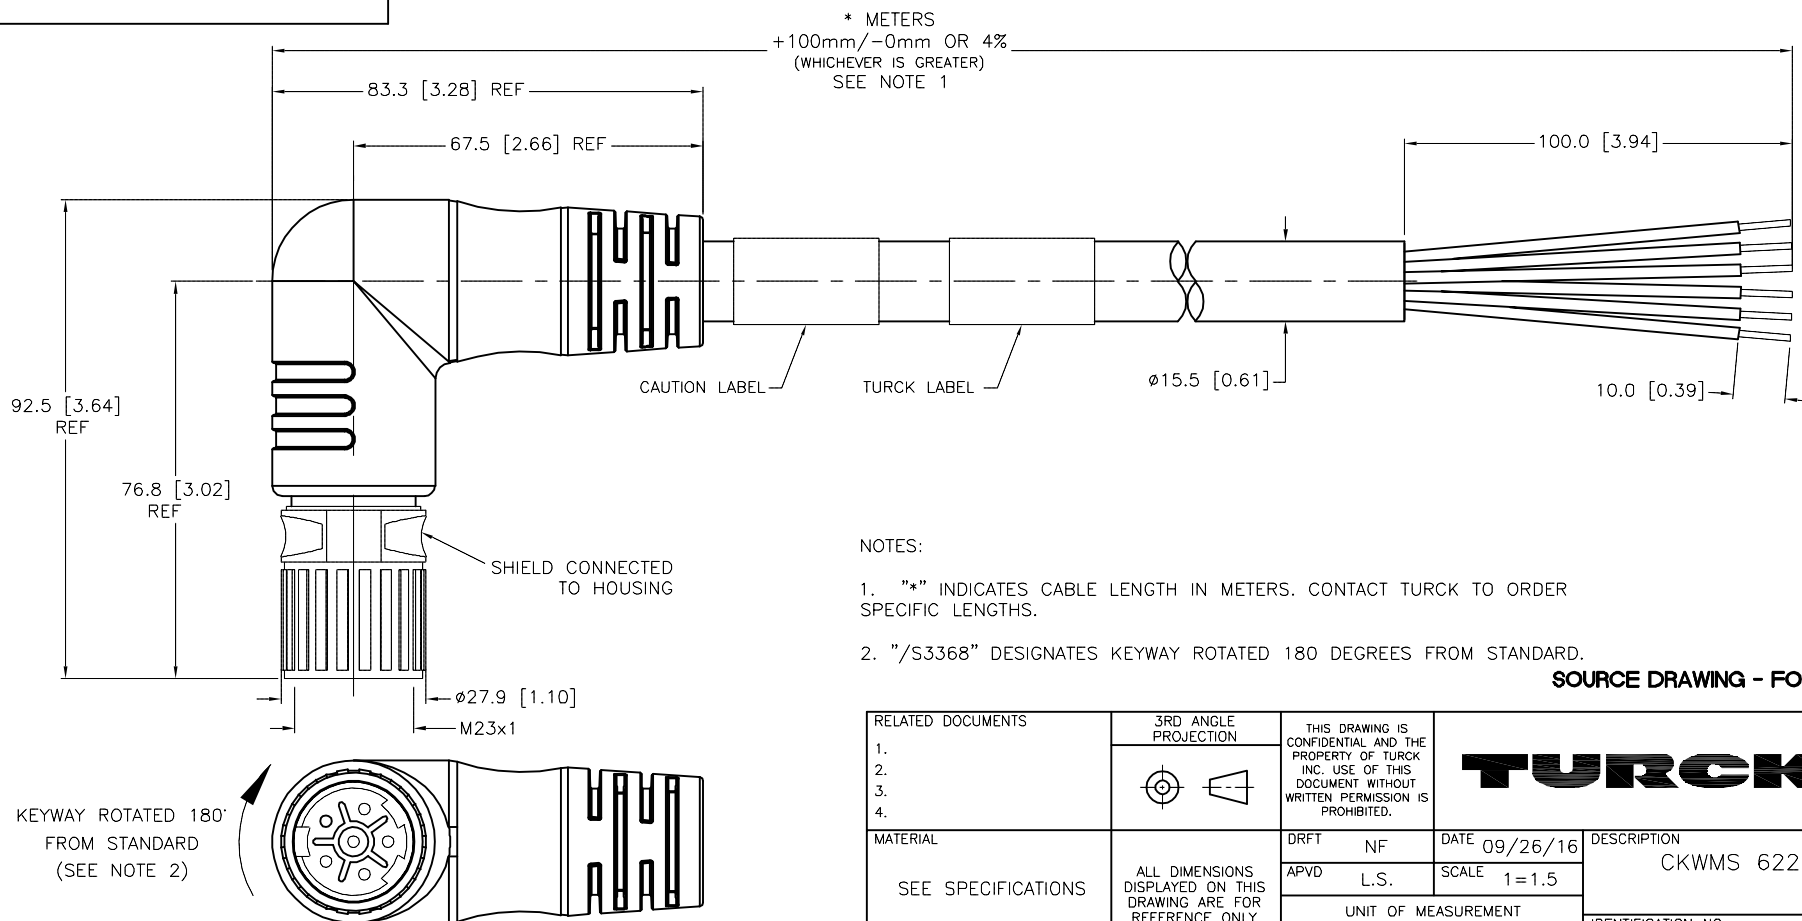

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S3368" DESIGNATES KEYWAY ROTATED 180 DEGREES FROM STANDARD.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
						
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	NF	DATE	09/26/16	DESCRIPTION CKWMS 622-286-*/S3368
FINISH SEE SPECIFICATIONS		APVD	L.S.	SCALE	1=1.5	
		UNIT OF MEASUREMENT MILLIMETER [INCH]				
		DO NOT SCALE THIS DRAWING				
		IDENTIFICATION NO.				REV C
		FILE: 777038324				SHEET 1 OF 1

C	UPDATED RATED CURRENT A	ER	09/26/18	66623
REV	DESCRIPTION	BY	DATE	ECO NO.