


FEMALE END VIEW




- 1 = WHITE
2 = BROWN
3 = GREEN
4 = YELLOW
5 = GRAY
6 = PINK
7 = BLUE
8 = RED



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPV/BLACK
MOLDED HEAD MATERIAL/COLOR	TPV/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (PTFE COATED)
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 VAC/75 VDC
OUTER CABLE JACKET MATERIAL/COLOR	TPV/WHITE
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS [AWG]	8x24 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

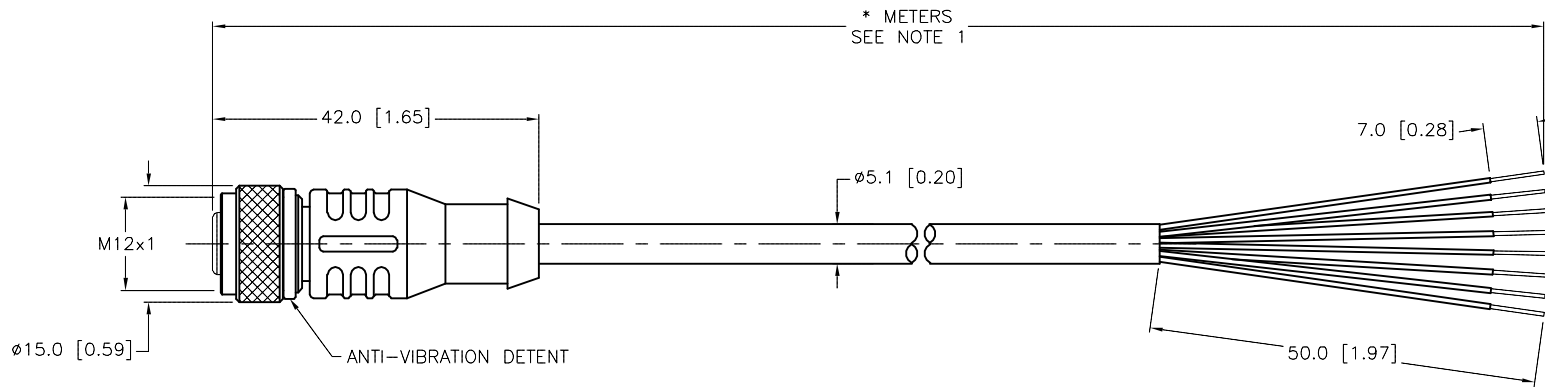

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S1092" DESIGNATES PTFE COATED COUPLING NUT.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.							
MATERIAL		DRFT	TV	DATE	08/19/16	DESCRIPTION WD-RKC 8T-*/S1092	
SEE SPECIFICATIONS		APVD	D.N.	SCALE	1=1.0		
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
SEE SPECIFICATIONS		MILLIMETER [INCH]				REV	
		DO NOT SCALE THIS DRAWING				A	
						FILE: 777038326	
						SHEET 1 OF 1	

A	DRAWING RELEASE	TV	10/04/16	
REV	DESCRIPTION	BY	DATE	ECO. NO.