


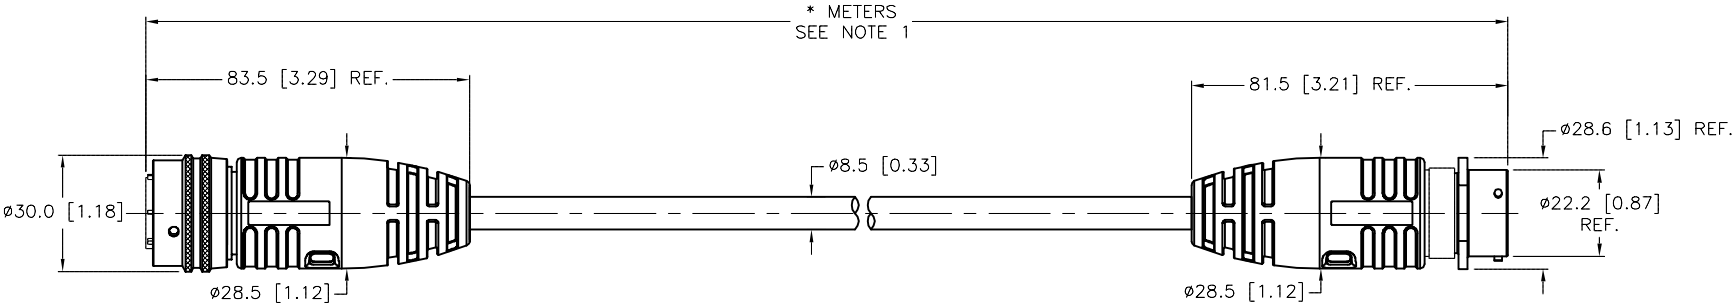


FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS																													
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NEOPRENE</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>COPPER ALLOY/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>ALUMINUM ALLOY/OLIVE DRAB CHROMATE</td></tr><tr><td>MOLD SLEEVE</td><td>ALUMINUM/BLACK ANODIZED</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>300 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS</td><td>19x22 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>24 AWG/ALUM.-POLYESTER FOIL</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C TO +105°C (-40°F TO +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68</td></tr><tr><td>CONNECTOR TYPE</td><td>MIL-DTL-26482</td></tr></table>		CONTACT CARRIER MATERIAL	NEOPRENE	MOLDED HEAD MATERIAL/COLOR	PVC/BLACK	CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD	COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE	MOLD SLEEVE	ALUMINUM/BLACK ANODIZED	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	300 V	OUTER JACKET MATERIAL/COLOR	PVC/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS	19x22 AWG	DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL	TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68	CONNECTOR TYPE	MIL-DTL-26482
CONTACT CARRIER MATERIAL	NEOPRENE																																
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK																																
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD																																
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE																																
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED																																
RATED CURRENT [A]	2.0 A																																
RATED VOLTAGE [V]	300 V																																
OUTER JACKET MATERIAL/COLOR	PVC/BLACK																																
CONDUCTOR INSULATION MATERIAL	PVC																																
NUMBER OF CONDUCTORS	19x22 AWG																																
DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL																																
TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)																																
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68																																
CONNECTOR TYPE	MIL-DTL-26482																																
A = BROWN B = TAN C = BLUE D = YELLOW/BROWN E = GREEN F = WHITE/YELLOW G = PINK H = BROWN/GREEN J = BLACK K = WHITE/GREEN L = RED/BLUE M = GREY/PINK N = ORANGE P = GREY R = RED S = WHITE T = VIOLET U = GREY/BROWN V = YELLOW		A = BROWN B = TAN C = BLUE D = YELLOW/BROWN E = GREEN F = WHITE/YELLOW G = PINK H = BROWN/GREEN J = BLACK K = WHITE/GREEN L = RED/BLUE M = GREY/PINK N = ORANGE P = GREY R = RED S = WHITE T = VIOLET U = GREY/BROWN V = YELLOW																															
CONNECTOR TYPE/STYLE - MS 3116M SHELL SIZE - 14 INSERT ARRANGEMENT - 19S		CONNECTOR TYPE/STYLE - MS 3111M SHELL SIZE - 14 INSERT ARRANGEMENT - 19P																															



CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:				RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.				1. 2. 3. 4.				DRFT TV APVD L.H.		DATE 10/24/16 SCALE 1=2.0	
				MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION MS 3116M-14-19S-0995-*MS 3111M-14-19P	
				FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. FILE: 777038482	
										REV B	
										SHEET 1 OF 1	