




HDDDB15F45 END VIEW		MALE END VIEW		SPECIFICATIONS																							
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>3.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>30 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPE/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>15x22 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C TO +105°C (-40°F TO +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS IEC IP67</td></tr></table>		CONTACT CARRIER MATERIAL	TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	3.0 A	RATED VOLTAGE [V]	30 VAC/VDC	OUTER JACKET MATERIAL/COLOR	TPE/BLACK	CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	15x22 AWG	TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)	PROTECTION CLASS	MEETS IEC IP67
CONTACT CARRIER MATERIAL	TPU																										
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																										
RATED CURRENT [A]	3.0 A																										
RATED VOLTAGE [V]	30 VAC/VDC																										
OUTER JACKET MATERIAL/COLOR	TPE/BLACK																										
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER																										
NUMBER OF CONDUCTORS [AWG]	15x22 AWG																										
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)																										
PROTECTION CLASS	MEETS IEC IP67																										
1 = BROWN 2 = RED/BLUE 3 = BLACK 4 = PINK 5 = GREEN 6 = BLUE 7 = ORANGE 8 = GRAY/BROWN 9 = VIOLET 10 = WHITE 11 = RED 12 = GRAY 13 = YELLOW 14 = TAN 15 = N/C		A = BROWN C = RED/BLUE E = BLACK G = PINK J = GREEN L = BLUE M = ORANGE N = GRAY/BROWN O = VIOLET P = WHITE R = RED S = GRAY T = YELLOW U = TAN																									

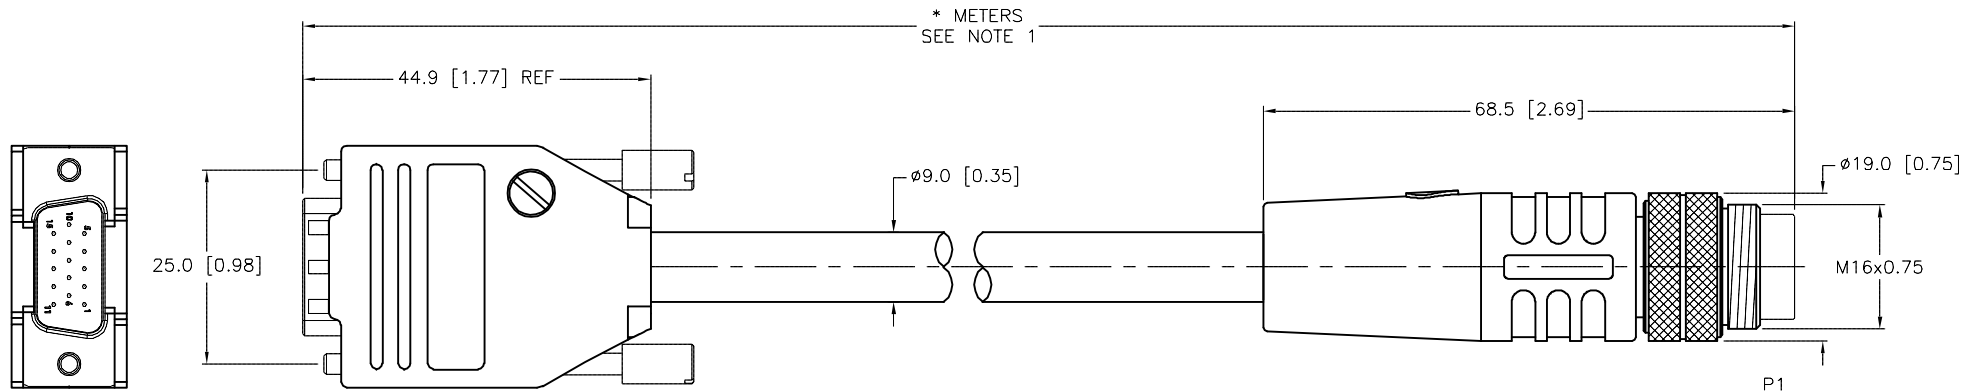


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S101" DESIGNATES FLEXLIFE-20 AND CTRACK CABLE.
3. UNUSED CONDUCTORS TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.
4. CABLE ASSEMBLIES FOR M16 CONNECTORS ARE RATED AS STAND ALONE. OVERALL CABLE ASSEMBLY RATING IS THE RESPONSIBILITY OF THE CUSTOMER.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	11/16/16				
SEE SPECIFICATIONS		APVD	K.Y.	SCALE	1=1.0				
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.				REV B
SEE SPECIFICATIONS									
				FILE: 777038671				SHEET 1 OF 1	