



FEMALE END VIEW



1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK



MALE END VIEW




1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x24 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)

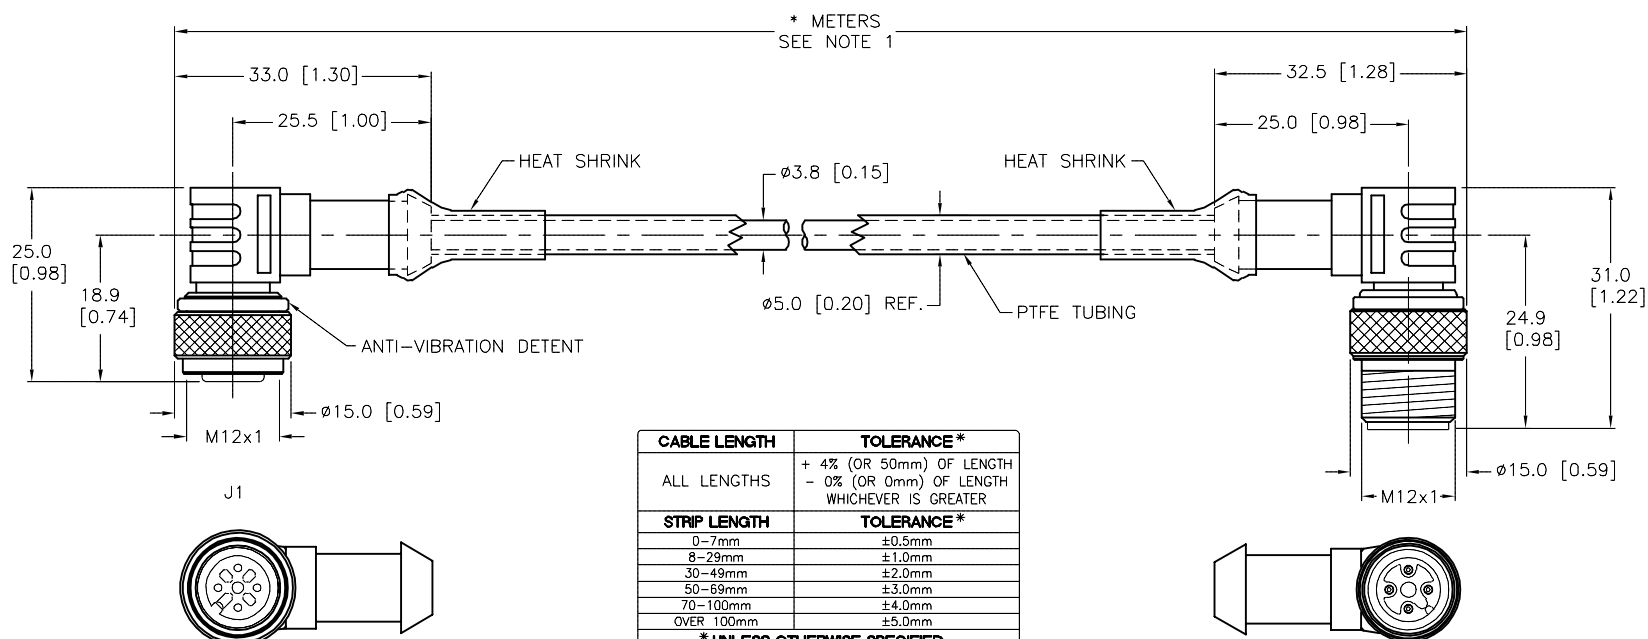

CABLE LENGTH

TOLERANCE *

ALL LENGTHS

+ 4% (OR 50mm) OF LENGTH
- 0% (OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH

TOLERANCE *

0-7mm

±0.5mm

8-29mm

±1.0mm

30-49mm

±2.0mm

50-69mm

±3.0mm

70-100mm

±4.0mm

OVER 100mm

±5.0mm

* UNLESS OTHERWISE SPECIFIED

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S1291" DESIGNATES PTFE TUBING AND SPECIAL CABLE.

B	UPDATE MALE COUPLING NUT	NF	04/23/18	56903
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.

2.

3.

4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT

TV

APVD

L.H.

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

TURCK

DATE

11/28/16

SCALE

1=1.0

DESCRIPTION

WK 4.4T-*--WS 4.4T/S1291

IDENTIFICATION NO.

REV

B

FILE: 777038689

SHEET 1 OF 1