


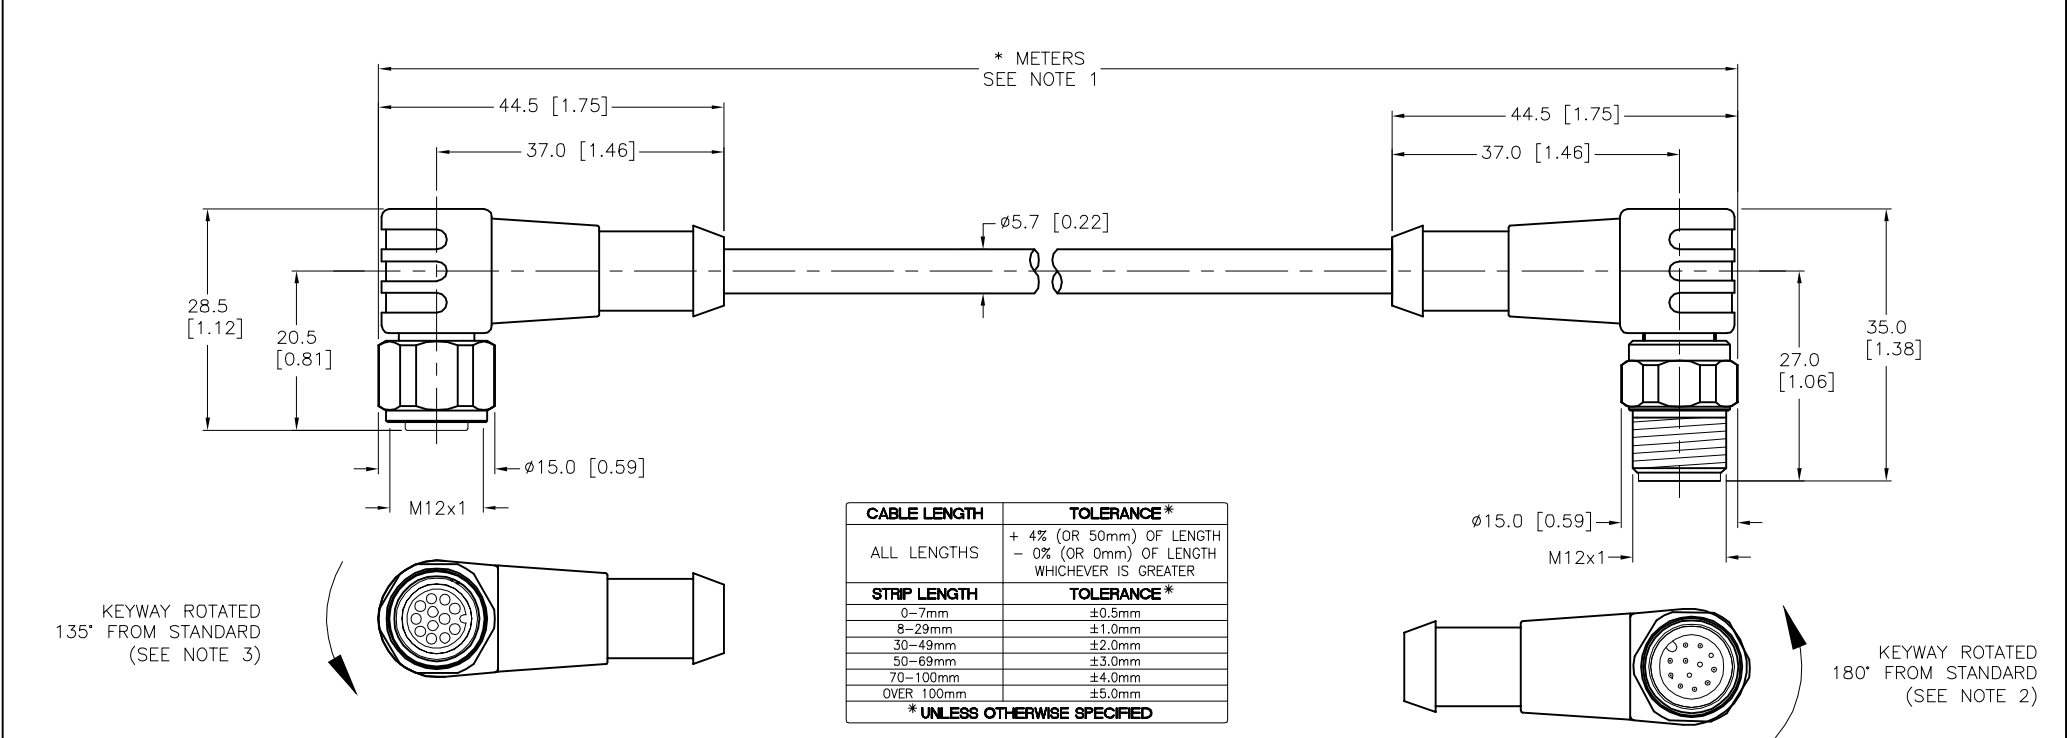


FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL/COLOR	TPV/BLACK
1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GREY 6 = PINK 7 = BLUE 8 = RED 9 = ORANGE 10 = TAN 11 = BLACK 12 = VIOLET		1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GREY 6 = PINK 7 = BLUE 8 = RED 9 = ORANGE 10 = TAN 11 = BLACK 12 = VIOLET		MOLDED HEAD MATERIAL/COLOR	TPV/WHITE
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	2.0 A
				RATED VOLTAGE [V]	30 V
				CABLE JACKET MATERIAL/COLOR	TPV/WHITE
				CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
				NUMBER OF CONDUCTORS [AWG]	12x24 AWG
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:				RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				1.				DRFT TV		DATE 12/12/16	
2. "/C1251" DESIGNATES MALE KEYWAY ROTATED 180 DEGREES COUNTER-CLOCKWISE FROM STANDARD.				2.				APVD L.H.		SCALE 1=1.0	
3. "/C1296" DESIGNATES KEYWAY ROTATED 135 DEGREES COUNTER-CLOCKWISE FROM STANDARD (KEYWAY DIRECTLY IN LINE WITH CABLE EXIT FROM PLUG BODY).				3.				UNIT OF MEASUREMENT		DESCRIPTION	
				4.				MILLIMETER [INCH]		WD-WKCV 12T-*--WSCV 12T/C1251/C1296	
				MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
				SEE SPECIFICATIONS						REV	
				FINISH						B	
				SEE SPECIFICATIONS						DO NOT SCALE THIS DRAWING	
										FILE: 777038740	
										SHEET 1 OF 1	
B UPDATE VOLTAGE RATING				CBM 02/21/23		78300					
REV DESCRIPTION				BY DATE		ECO NO.					