




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS																									
																													
1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED		1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED																											
																													
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>60 VAC/75 VDC</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>8x24 AWG, 26 AWG DRAIN</td></tr><tr><td>DRAIN/SHIELD</td><td>26 AWG/FOIL & TINNED-COPPER BRAID</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P AND IEC IP68, IP69K</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	60 VAC/75 VDC	OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	8x24 AWG, 26 AWG DRAIN	DRAIN/SHIELD	26 AWG/FOIL & TINNED-COPPER BRAID	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K
CONTACT CARRIER MATERIAL	NYLON OR TPU																												
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																												
CONTACT MATERIAL/PLATING	BRASS/GOLD																												
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																												
RATED CURRENT [A]	2.0 A																												
RATED VOLTAGE [V]	60 VAC/75 VDC																												
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK																												
CONDUCTOR INSULATION MATERIAL	PVC																												
NUMBER OF CONDUCTORS [AWG]	8x24 AWG, 26 AWG DRAIN																												
DRAIN/SHIELD	26 AWG/FOIL & TINNED-COPPER BRAID																												
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																												
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K																												

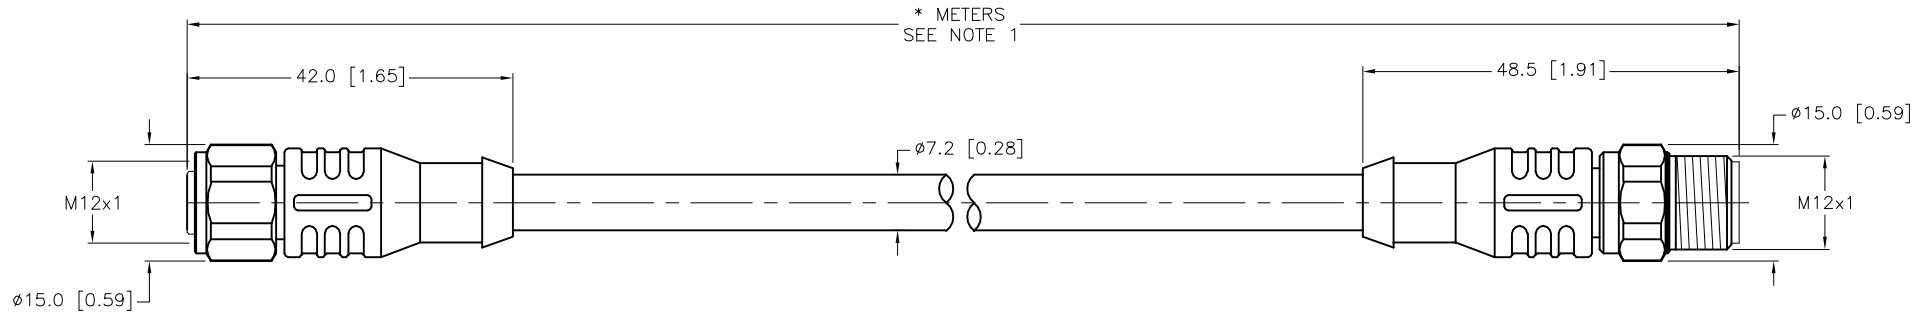


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1."*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT TV		DATE 01/06/17	
MATERIAL		SEE SPECIFICATIONS		APVD L.H.		SCALE 1=1.0	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
				CONTACT TURCK FOR MORE INFORMATION		E-RKCV 8T-930-*--RSCV 8T	
				MILLIMETER [INCH]		IDENTIFICATION NO.	
				DO NOT SCALE THIS DRAWING		REV A	
						FILE: 777038839	
						SHEET 1 OF 1	

A	DRAWING RELEASE	TV	01/10/17	
REV	DESCRIPTION	BY	DATE	ECO. NO.