
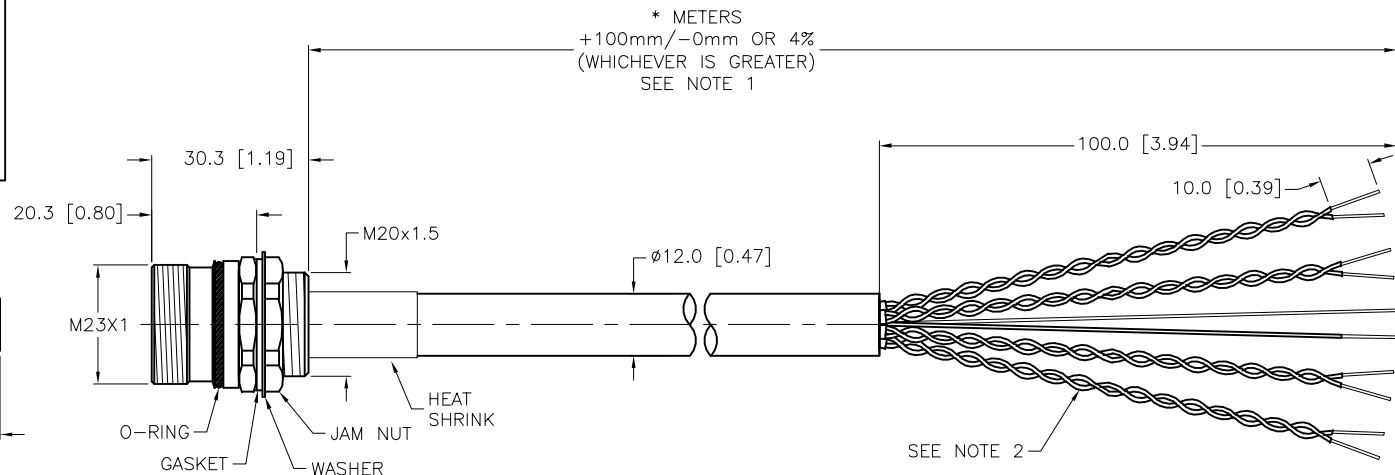



DRAIN/SHIELD	5x20 AWG DRAINS/ALUMINUM-POLYESTER FOIL
CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/ DRAIN, 1 GND, 1 DRAIN

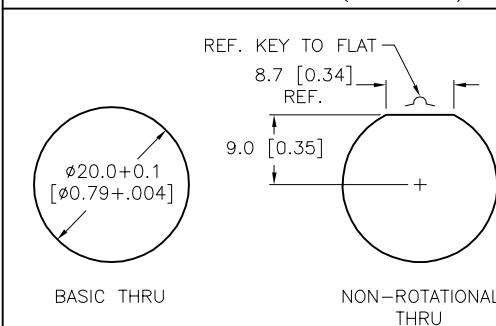


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. UNUSED PAIRS' DRAIN ARE TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

C	UPDATED CONDUCTOR STRIP LENGTH	ER	05/27/21	76780
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DATE 12/01/16		DESCRIPTION P-CSFL 12-2031-*	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT NF APVD M.A.		SCALE 1=1.5			
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV C	
FINISH									
SEE SPECIFICATIONS						FILE: 777038884		SHEET 1 OF 1	