

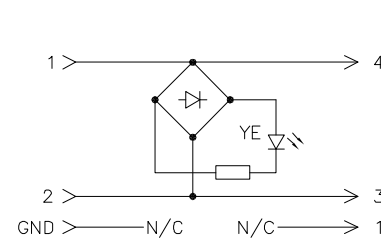
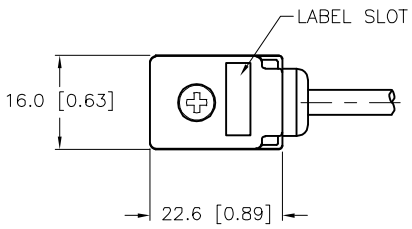
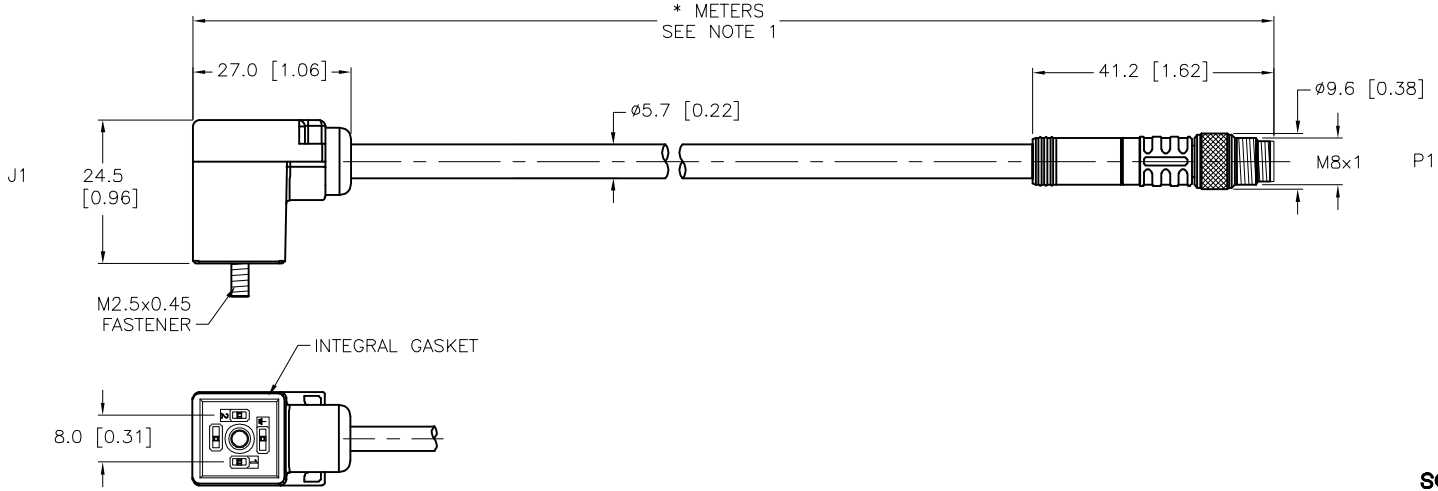



VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = BLUE GND = N/C	 1 = N/C 3 = BLUE 4 = BROWN 		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (J1), YELLOW (P1)
			CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), BRASS/GOLD (P1)
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	24 VAC/VDC
			OUTER JACKET MATERIAL/COLOR	TPU/BLACK
			CONDUCTOR INSULATION MATERIAL	POLYPROPYLENE
			NUMER OF CONDUCTORS [AWG]	4x22 AWG
			OPERATING TEMPERATURE	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

 LABEL SLOT																					
 * METERS SEE NOTE 1 J1 24.5 [0.96] 27.0 [1.06] 41.2 [1.62] 9.6 [0.38] M2.5x0.45 FASTENER INTEGRAL GASKET 8.0 [0.31]																					
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">* UNLESS OTHERWISE SPECIFIED</td></tr></table>		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	* UNLESS OTHERWISE SPECIFIED	
CABLE LENGTH	TOLERANCE*																				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																				
STRIP LENGTH	TOLERANCE*																				
0-7mm	±0.5mm																				
8-29mm	±1.0mm																				
30-49mm	±2.0mm																				
50-69mm	±3.0mm																				
70-100mm	±4.0mm																				
OVER 100mm	±5.0mm																				
* UNLESS OTHERWISE SPECIFIED																					

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S1064" DESIGNATES HALOGEN FREE CABLE.

B	UPDATE FASTENER	NF	10/09/25	81430
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
						
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	TV	DATE	01/04/17	DESCRIPTION TC8S 2-L037-*M-PSGC 3M/S1064
FINISH SEE SPECIFICATIONS		APVD	K.Y.	SCALE	1=1.3	
		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.
DO NOT SCALE THIS DRAWING				FILE: 777038917		SHEET 1 OF 1