





FEMALE END VIEW	MALE END VIEW	TYPICAL PANEL CUTOUT	SPECIFICATIONS																											
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>O-RING MATERIAL</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>5x22 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr><tr><td>MAX. PANEL THICKNESS</td><td>3.0 [0.12]</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	O-RING MATERIAL	NITRILE	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	5x22 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	MAX. PANEL THICKNESS	3.0 [0.12]	
CONTACT CARRIER MATERIAL	NYLON OR TPU																													
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																													
CONTACT MATERIAL/PLATING	BRASS/GOLD																													
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																													
O-RING MATERIAL	NITRILE																													
RATED CURRENT [A]	4.0 A																													
RATED VOLTAGE [V]	250 V																													
OUTER JACKET MATERIAL/COLOR	PVC/GRAY																													
CONDUCTOR INSULATION MATERIAL	PVC																													
NUMBER OF CONDUCTORS [AWG]	5x22 AWG																													
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																													
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																													
MAX. PANEL THICKNESS	3.0 [0.12]																													

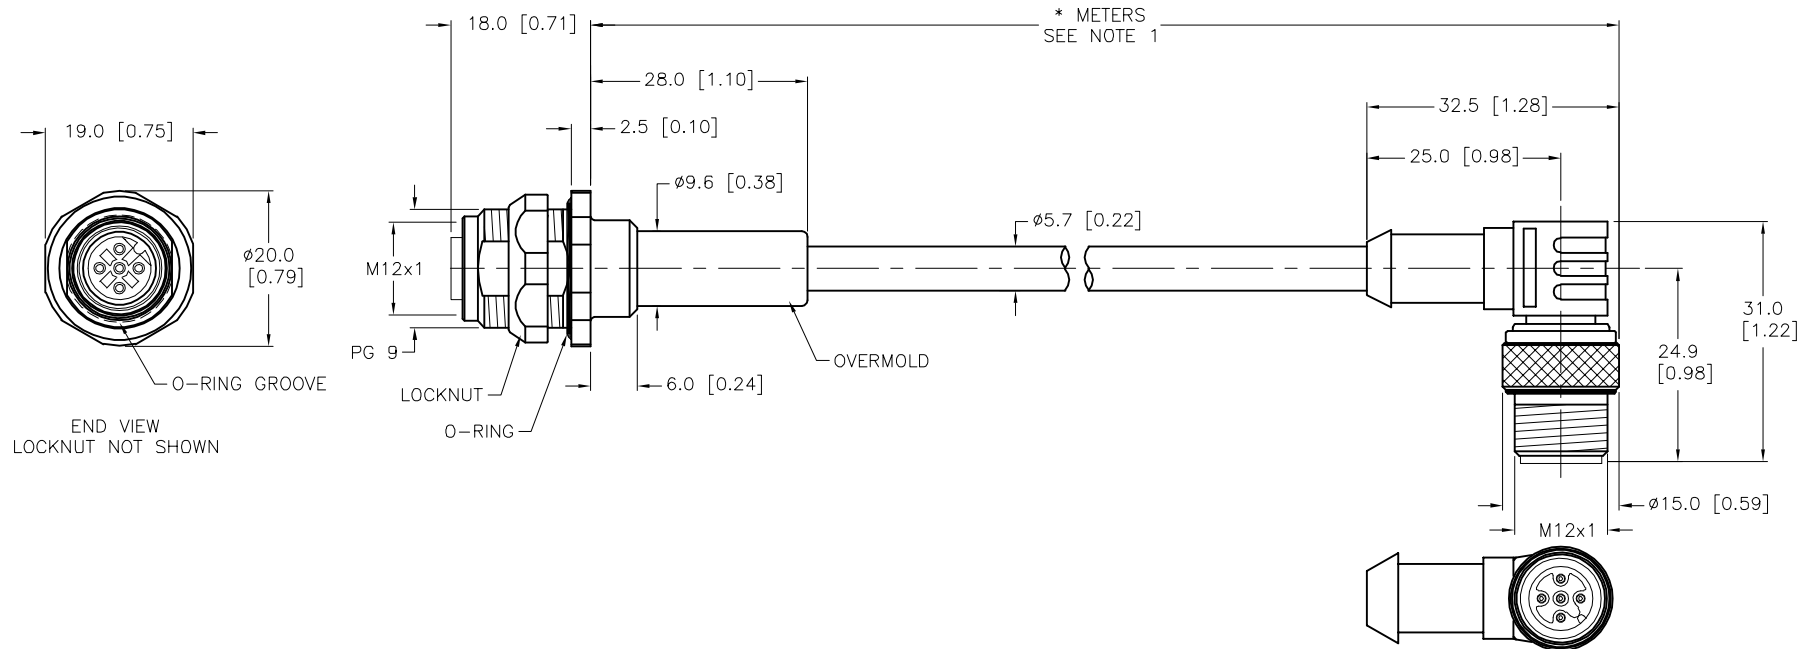


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us						
								
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	TV	DATE	01/20/17	DESCRIPTION FKFD 4.5-*--WS 4.5T		
		APVD	D.N.	SCALE	1=1.0			
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.	REV B
			DO NOT SCALE THIS DRAWING					
		FILE: 777038937				SHEET 1 OF 1		