



MALE END VIEW



A = GREEN/YELLOW
B = BLACK
C = WHITE

FEMALE END VIEW




1 = GREEN/YELLOW
2 = N/C
3 = BLACK
4 = WHITE



SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU or NYLON (J1)
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK (P1), YELLOW (J1)
CONTACT MATERIAL/PLATING	BRASS/GOLD (J1)
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (J1)
DEUTSCH CONNECTOR	DT04-3P-E004 (P1)
DEUTSCH WEDGELOCK	W3P (P1)
DEUTSCH TERMINALS	0462-202-16141 (P1)
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
RATED CURRENT [A]	4.0 A
OPERATING VOLTAGE [V]	250 V
NUMBER OF CONDUCTORS [AWG]	3x18 AWG
PROTECTION CLASS	IP67
CABLE APPROVALS	(UL) TC DIRECT BURIAL 90C DRY/WET 600V SUNLIGHT RESISTANT OIL RES II -40C OR WTTc 90C DRY/WET 1000V OR AWM 105C 600V OR CSA CIC/TC PVC/N 90C DRY 75C WET 600V FT1 FT4 SUNLIGHT RESISTANT -40C

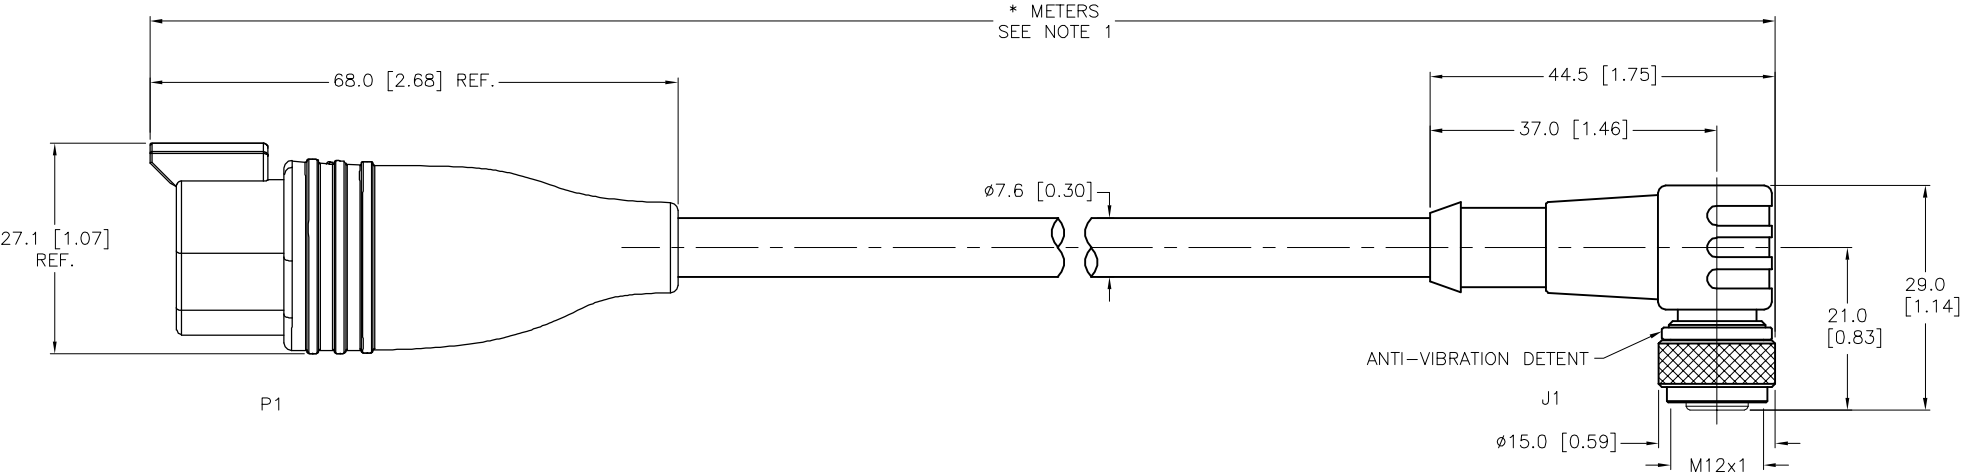

P1

J1

ANTI-VIBRATION DETENT

M12x1

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT TV
APVD R.P.

DATE 01/17/17
SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DESCRIPTION
DT04-3P-2145-*M-WKC 4T

IDENTIFICATION NO.

REV
C

FILE: 777039023

SHEET 1 OF 1