




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
 1 = BROWN 2 = BLUE 3 = BLACK 4 = N/C 5 = N/C 		 1 = BROWN 2 = BLUE 3 = BLUE 4 = BLACK 		CONTACT CARRIER MATERIAL	NYLON OR TPU
				MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	3x22 AWG
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

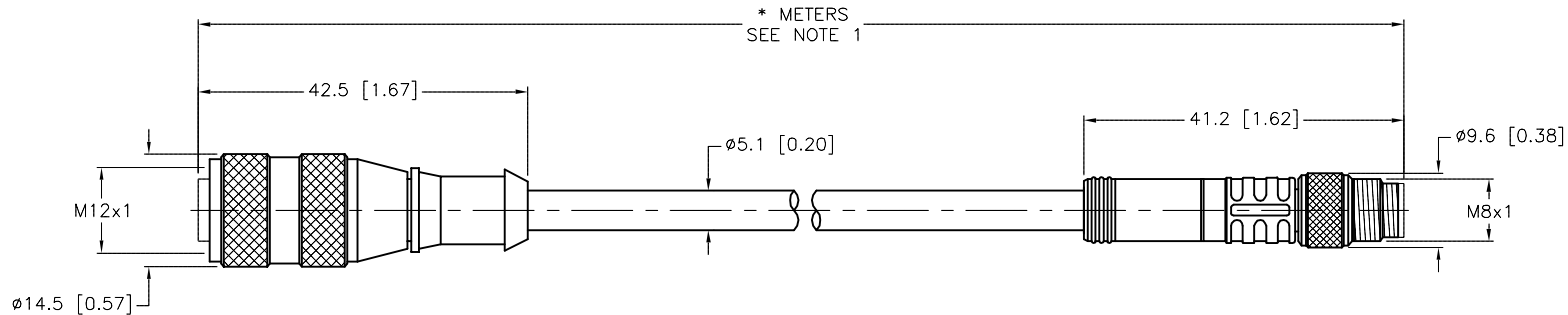


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- 1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. UNUSED CONDUCTOR TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
1.				DRFT	TV	DATE	01/16/17	DESCRIPTION WAKW 4T-*--PSGC 3M			
2.				APVD	K.Y.	SCALE	1=1.0				
3.				UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV A	
4.											
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DO NOT SCALE THIS DRAWING				FILE: 777039027		SHEET 1 OF 1	
SEE SPECIFICATIONS											
FINISH		CONTACT TURCK FOR MORE INFORMATION									
SEE SPECIFICATIONS											

A	DRAWING RELEASE	TR	02/03/17	
REV	DESCRIPTION	BY	DATE	ECO NO.