


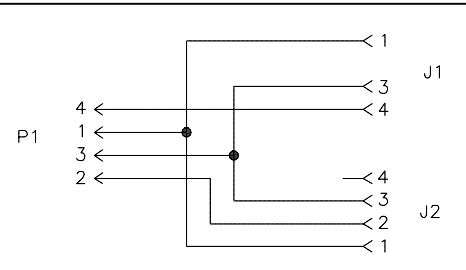
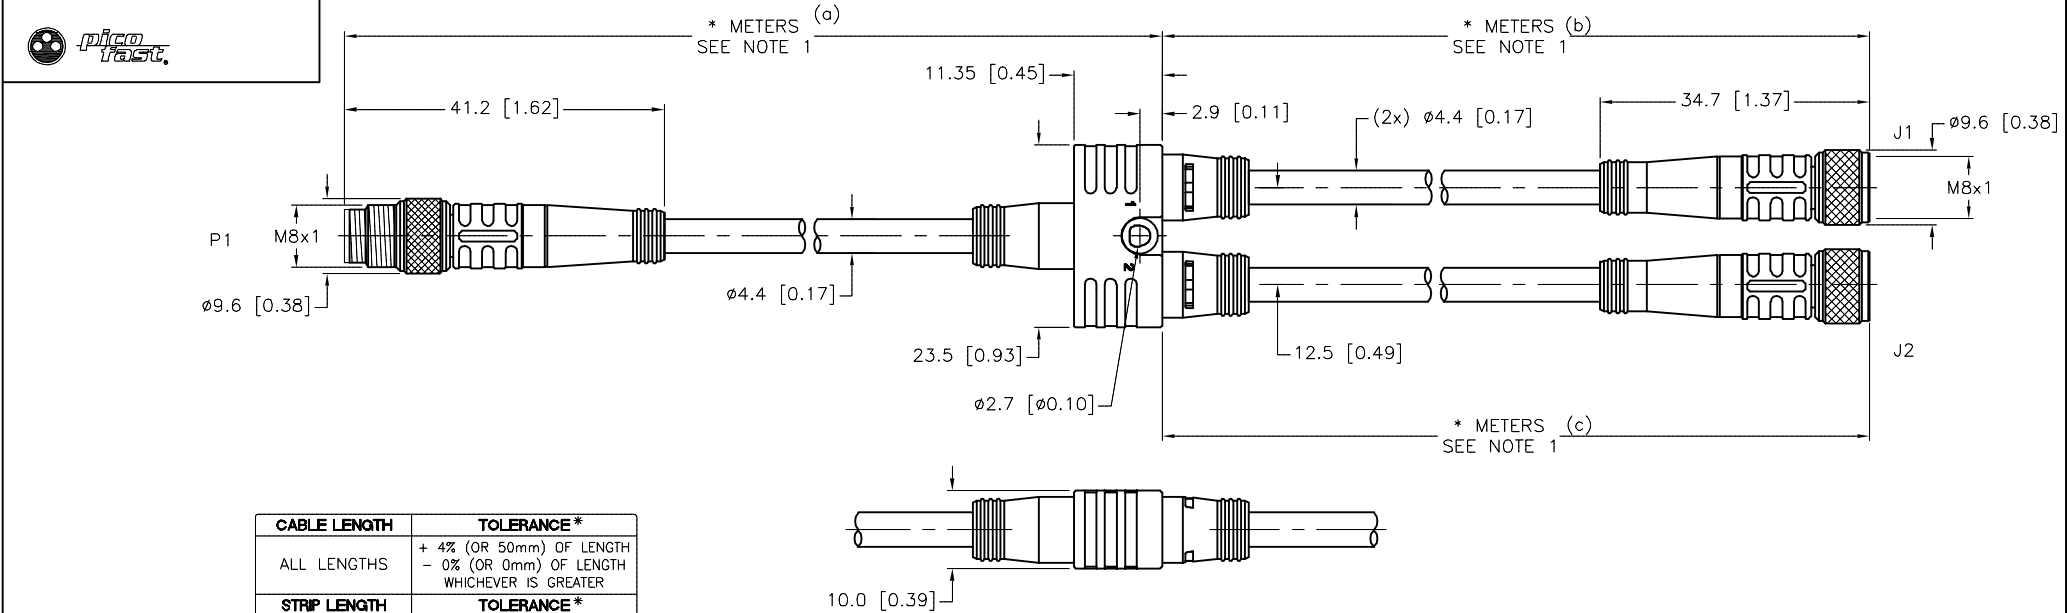


MALE END VIEW (P1)	FEMALE END VIEW (J2)	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	125 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x26 AWG (P1) 3x24 AWG (J1,J2)
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67




CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S3414" DESIGNATES CUSTOM WIRING #1 AND #3 COMMON, P1 #4 TO J1 #4, P1 #2 TO J2 #2.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS			3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.					DRFT NF		DATE 01/27/17	
MATERIAL			ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD D.C.		SCALE 1=1.0	
FINISH			CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION YP2-PSG4M-*/PKG3M-*/PKG4M-*/S3414 (a) (b)(c)	
SEE SPECIFICATIONS			DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV A	
SEE SPECIFICATIONS			FILE: 777039087		SHEET 1 OF 1			

A	DRAWING RELEASE	NF	02/15/17	
REV	DESCRIPTION	BY	DATE	ECO NO.